


### Luminaire Disconnects

Meets 2011 NEC® requirements for fluorescent fixtures and ballasts!

### Luminaire Disconnects

- Oversized electrical contacts improve conductivity and reduce temperature rise
- Integral wire leads ease installation — even with multiple wire sizes — and support connection to copper or aluminum wiring
- Foolproof design ensures mating halves of disconnect are installed correctly, preventing reverse polarization
- Finger-safe line side protects installer and enables safe servicing without disconnecting power
- Line and load indications clearly identified on each half
- Rounded, compact design fits in tight spaces
- Bright orange for instant identification as a safety device

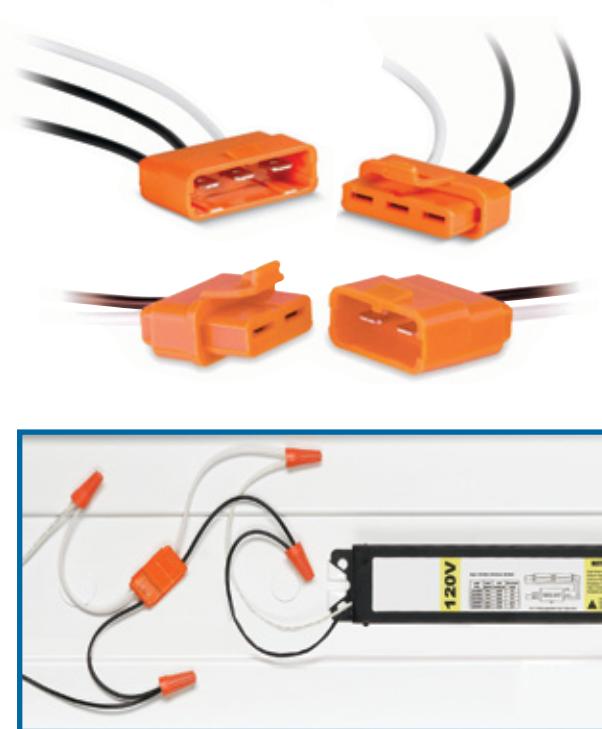

#### Specifications

- |  |  |
|--|--|
| • Housing: Polycarbonate                           | • Electrical Rating: 4A, 600V  |
| • Contacts: Tin-plated brass                       | • Standards: UL Listed E07134, CSA Certified, NEC® Section 410.130(G) 2011 edition compliant |
| • Integral Leads: Insulated #18 AWG solid copper   |  |
| • Temp. Rating: 105° C                             |  |
| • Flammability: UL94V-2 (V-0 available on request) |  |

NEC and National Electrical Code are registered trademarks of the National Fire Protection Association, Inc.



CAT. NO.	DESCRIPTION	PKG. QTY.
<b>Bulk Packaging for OEMs</b>		
LD2-D	2-Pole Luminaire Disconnect	500
LD3-D	3-Pole Luminaire Disconnect	500
<i>Kits for Servicing Electricians (includes two male/line half and two female/load half of the luminaire disconnect, polybagged with installation instructions)</i>		
LD2	2-Pole Luminaire Disconnect Kit	20
LD3	3-Pole Luminaire Disconnect Kit	20

**Faster, easier and safer than manual seating of disconnects!**

### Disconnect Installation Tool

- Perfect for wire-harness assemblers and panel builders
- Dual-ended with slots to fit red and blue (male and female) or yellow disconnects
- Color-coded dots for easy matching of disconnect with correct tool end
- Lightweight and only 5 1/8" long — fits in a shirt pocket like a pen



This one-of-a-kind tool may be used to seat all sizes of Thomas & Betts disconnects.

CAT. NO.	DESCRIPTION	PKG. QTY.
DT22-10	Sta-Kon® Disconnect Installation Tool	1