
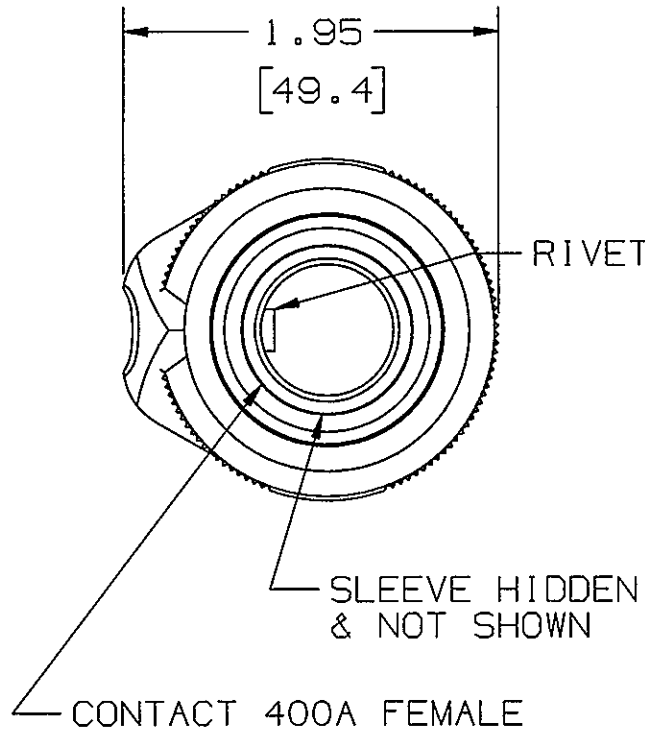
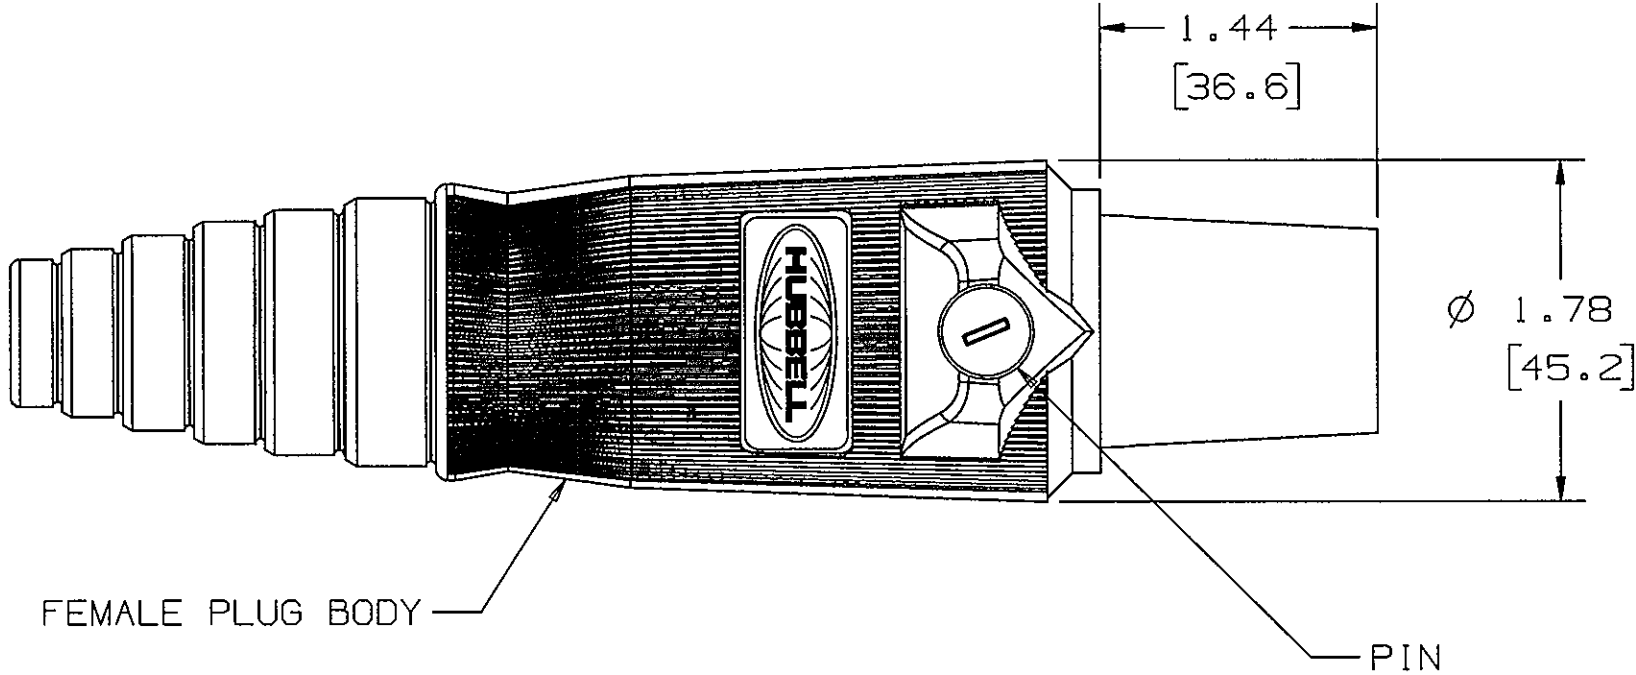


M-8911

3

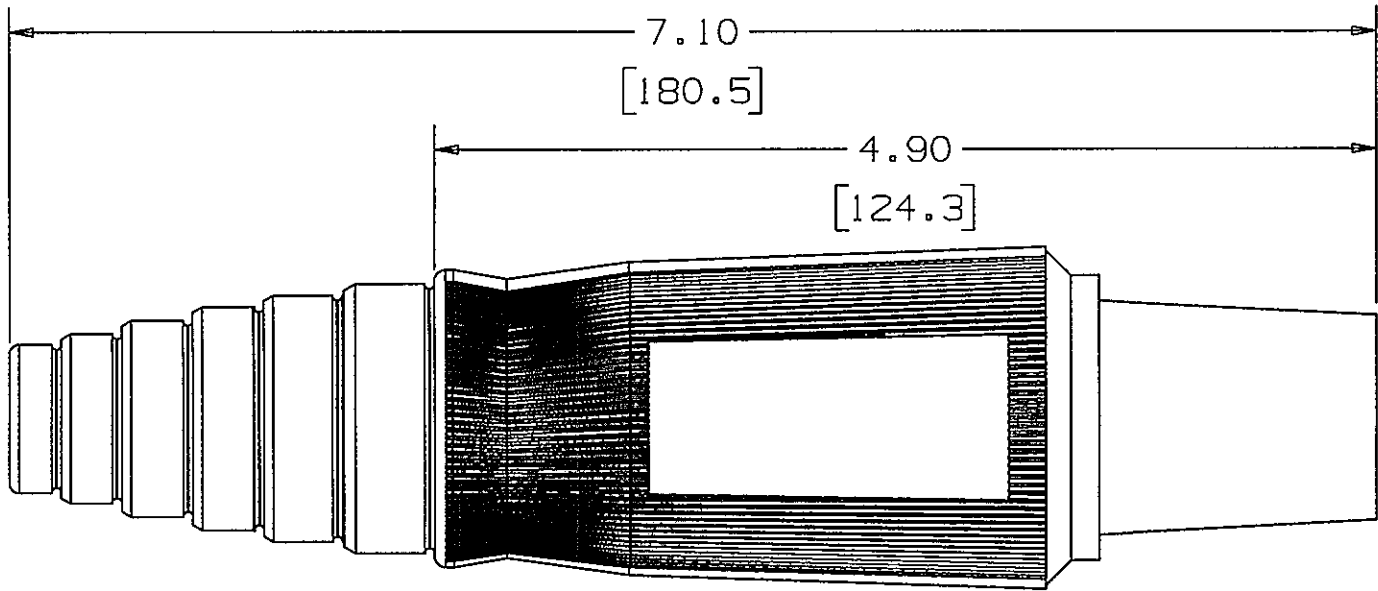

- NOTES:
1. DIMENSIONS ARE INCHES $\pm .02$
[mm] $\pm .5$
 2. CABLE SIZE: 2/0 AWG - 4/0, COPPER ONLY
 3. RATING 600VAC/250VDC 400 AMPS
 4. UL/c-UL ENCLOSURE TYPES 3R, 4X, 12, SEE INSTRUCTION SHEET
 5. 1/2-20 UNF-2A X 1/2 LG. 7/32 SOCKET HEAD SET SCREWS,
LEAD WIRE & COPPER SHEET NOT SHOWN.

HUBBELL CAT. NO.	COLOR
HBL400FBK	BLACK
HBL400FW	WHITE
HBL400FGN	GREEN
HBL400FR	RED
HBL400FBL	BLUE
HBL400FO	ORANGE
HBL400FBN	BROWN
HBL400FY	YELLOW

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
FEMALE PLUG BODY	TPE	SEE TABLE
SLEEVE	NYLON	BLACK
CONTACT 400A FEMALE	BRASS	
RIVET	BRASS	
PIN	NYLON	BLACK
SET SCREW	STEEL	NICKEL
LEAD WIRE	COPPER	
COPPER SHEET	COPPER	

3	3-21-12 DIM. 7.10 WAS 6.84 (ADDED 6th RING TO BODY) PER DCN 18725 CZH CZH	CZH	3/21/12
2	REMOVE MOLDED IN TEXT FROM VIEWS, ADDING REFERENCE SET TO THIS DRAWING & FILE D-58727-01 REMOVE $\phi 1.06$ [27.0] & $\phi 1.22$ [31.0] ADD CONTACT 400A FEMALE CALL-OUT ADD $\pm .02$ & $\pm .5$ TO NOTE 1 CHANGED NOTE 4 LIST OF PARTS DESCRIPTION FEMALE PLUG BODY WAS FEMALE PLUG PER DCN 11484 TWB	TWB	12/15/04
1	RELEASED PER DCN 10992 MJM	TWB	6/26/03
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE SINGLE POLE 400A FEMALE PLUGS			
TOLERANCES UNLESS OTHERWISE SPECIFIED FRACTIONS $\pm 1/64$ DECIMALS $\pm .005$ ANGLES $\pm 2^\circ$		WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT	
DR. BY MJM		APP. BY TWB	
TR. BY		SCALE 1:1	
CHK'D BY TWB		DATE 6/11/03	