


M-8923

5

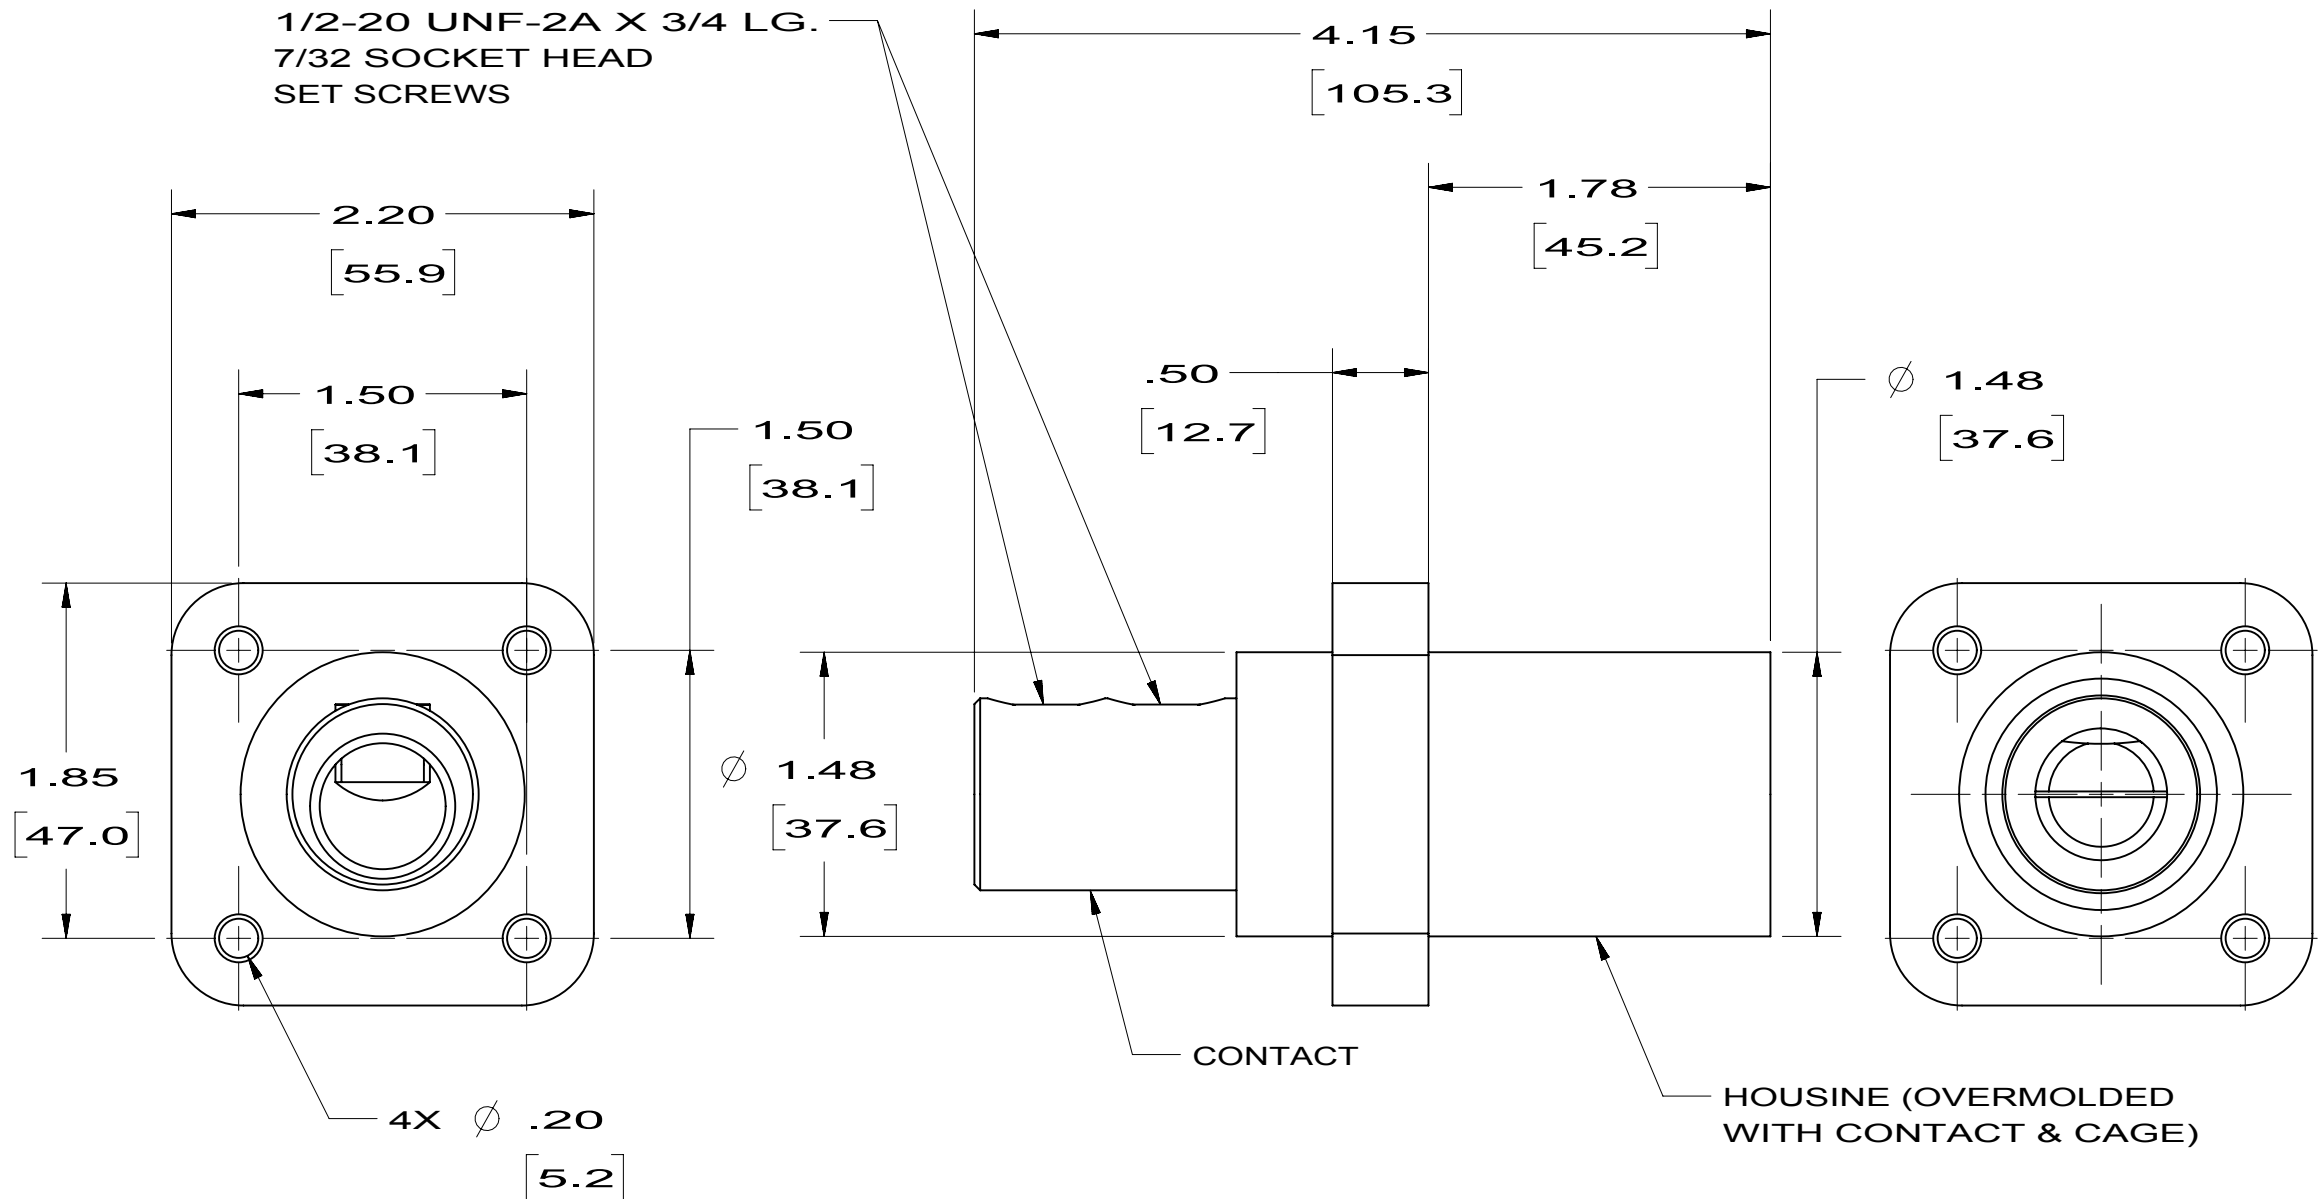


NOTES:

- DIMENSIONS ARE INCHES $\pm .02$
[mm] $\pm .5$
- RATING: 600V 400 AMP.
- UL/c-UL ENCLOSURE TYPES 3R, 4X, 12,
SEE INSTRUCTION SHEET.
- CABLE SIZE #4 AWG - 4/0, COPPER ONLY.
- LEAD WIRE & COPPER SHEET NOT SHOWN.

HUBBELL CAT. NO.	COLOR
HBLMRBK	BLACK
HBLMRW	WHITE
HBLMRGN	GREEN
HBLMRR	RED
HBLMRBL	BLUE
HBLMRO	ORANGE
HBLMRBN	BROWN
HBLMRY	YELLOW

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
HOUSING	TPE	SEE TABLE
CONTACT	BRASS	
CAGE	NYLON	BLACK
SET SCREW	NYLON	NICKEL
LEAD WIRE	COPPER	
COPPER SHEET	COPPER	



CATALOG NO. HBLMRBK
(NOT SHOWN TO SCALE)

5	REVISED NOTE 2 FROM 600VAC/250VDC TO 600V PER DCN 23410 RGP	RGP	11/01/17
4	REDRAWN WITH EMBEDDED CAD MODEL WITH NO CHANGES TO PART GEOMETRY PER DCN 21895 SPN	DJP	2/5/16
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE
PRODUCT SHOWN ON THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT NOTICE

TITLE SINGLE POLE MALE
RECEPTACLE WITH
DOUBLE SET SCREW

TOLERANCES UNLESS OTHERWISE SPECIFIED	WIRING DEVICE-KELLEMS HUBBELL INCORPORATED SHELTON, CT		
.XX = $\pm .01$.XXX = $\pm .005$ ANGLES = $\pm 2^\circ$	DR. BY MJM	APP. BY TWB	
	TR. BY	SCALE 1:1	
	CHK. BY TWB	DATE 6/11/03	