




WIRE TERMINATION

WWW.IDEALIND.COM • 1-800-435-0705 CUSTOMER ASSISTANCE

Vinyl Insulated Spade Terminal Dimensions

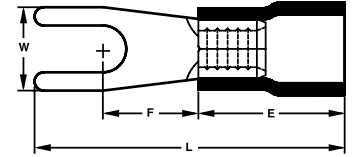

Wire Range (AWG)	Wire Range (mm ²)	Stud Size (in.)	Stud Size (mm)	Max. Wire Ins. Dia. (in.)	Max Wire Ins. Dia. (mm)	Dimensions (in.)				Dimensions (mm)				Cat. No.
						L	W	E	F	L	W	E	F	
22-18	0.5 - 1.0	6	3.7	.157	4.0	.827	.252	.394	.256	21.0	6.4	10.0	6.5	83-7111 84-7111
		8	4.3			.827	.283	.394	.256	21.0	7.2	10.0	6.5	83-7121
		10	5.3			.827	.374	.394	.256	21.0	9.5	10.0	6.5	83-7131
16-14	1.5 - 2.5	6	3.7	.177	4.5	.827	.236	.394	.256	21.0	6.0	10.0	6.5	83-7151
		8	4.3			.827	.283	.394	.256	21.0	7.2	10.0	6.5	83-7161 84-7161
		10	5.3			.827	.366	.394	.256	21.0	9.3	10.0	6.5	83-7171 84-7171
12-10	4.0 - 6.0	6	3.7	.248	6.3	1.004	.327	.512	.276	25.5	8.3	13.0	7.0	83-7201
		8	4.3			1.004	.283	.512	.357	25.5	9.0	13.0	7.0	83-7211
		10	5.3			1.004	.283	.512	.354	25.5	9.0	13.0	7.0	83-7221 84-7221
		1/4	6.4			1.240	.472	.512	.472	31.5	12.0	13.0	12.0	83-7231

75°C/600 Volts max.

