



Pass & Seymour

Straight Blade Receptacles Construction Grade 15 & 20A, 125V

CRB5262, CRB5362

Uncompromising quality, excellent value.

These sturdy receptacles offer excellent value. They deliver rugged construction, including impact-resistant nylon faces and corrosion-resistant plated steel straps. Screw-pressure-plate back wiring ensures excellent electrical connections and easy installation.



Features & Benefits

.032 inch thick, brass, triple-wipe power contacts for lasting retention.


Two drive screws anchor strap to back body and face where abrupt removal torque is strongest.

Corrosion-resistant, plated steel strap locked in to face and back body to resist pulling away from face/body assembly.

Auto-ground eliminates the necessity to terminate grounding conductor to device.

Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.

Tri-drive steel terminal screws. Internal screw-pressure-plate back and side wire capability. Two back wire holes for more wiring flexibility.

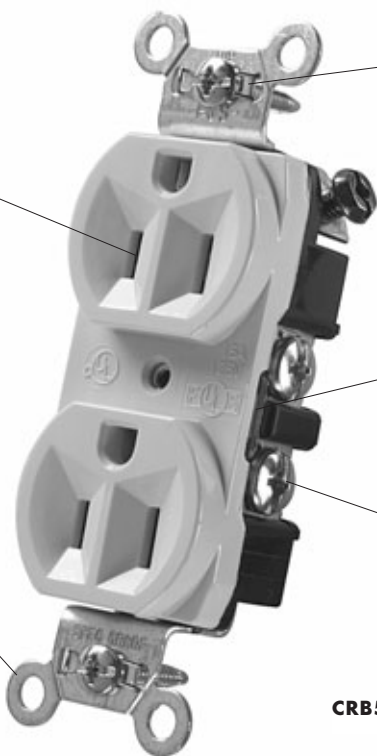

CRB5262-LA

Field Uses/Vertical Markets

- | | | | |
|-------------|-----------------------|---------------------|----------|
| ■ Education | ■ Institutional | ■ Retail | ■ Office |
| | ■ Hospitality/Lodging | ■ Multiple Dwelling | |

Straight Blade Receptacles Construction Grade 15 & 20A, 125V

Ordering Information

Catalog Number	Rating A. V.	Color	NEMA Config. No.
Duplex Receptacles Back & Side Wire			
CRB5262-I	15 125	Ivory	5-15R
CRB5262-W	15 125	White	5-15R
CRB5262	15 125	Brown	5-15R
CRB5262-GRY	15 125	Gray	5-15R
CRB5262-BK	15 125	Black	5-15R
CRB5262-RED	15 125	Red	5-15R
CRB5262-LA	15 125	Light Almond	5-15R
CRB5362-I	20 125	Ivory	5-20R
CRB5362-W	20 125	White	5-20R
CRB5362	20 125	Brown	5-20R
CRB5362-GRY	20 125	Gray	5-20R
CRB5362-BK	20 125	Black	5-20R
CRB5362-RED	20 125	Red	5-20R
CRB5362-LA	20 125	Light Almond	5-20R



NEMA
5-15R



NEMA
5-20R

For more information on these and other P&S products refer to our Product Guide or visit our web site.

Straight Blade Receptacles Construction Grade 15 & 20A, 125V



Pass & Seymour

Technical Specifications

3rd Party Compliance

UL Listed, File Number E140596, Standard UL498.
Federal Specification WC596.
CSA/CUL approved, File Number LR16063, Standard CSA-C22.2 No. 42.

Performance

Electrical


Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

Mechanical

Terminal Identification	Terminal Identification in accordance with UL498 (Brass, White, Green)
Terminal Accommodation	#14 AWG – #10 AWG copper conductor only
Product Identification	Ratings are a permanent part of the device

Environmental

Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

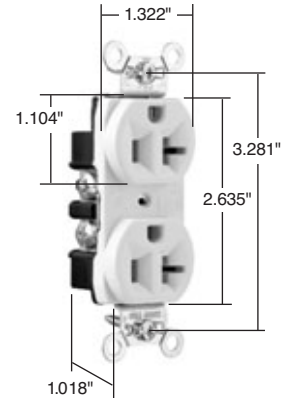

Dimensions for
15 & 20 Amp


Materials

Face	Nylon	Terminal Screws	#8 Tri-Drive Steel
Back Body	PVC		(Neutral = Nickel-Plated Steel)
Line Contacts	.032 688 Brass	Ground Screw	#8 Hex Tri-Drive Steel
Mounting Strap	.042 Zinc-Plated Steel	Assembly Drive Screw	Zinc-Plated Steel
Ground Contacts	.040 260 Brass	Auto-Ground Clip	Stainless Steel
Pressure Plate	.080 Steel	Mounting Screws	Tri-Drive Steel

Warranty


1 Year

Complimentary Devices & Accessories

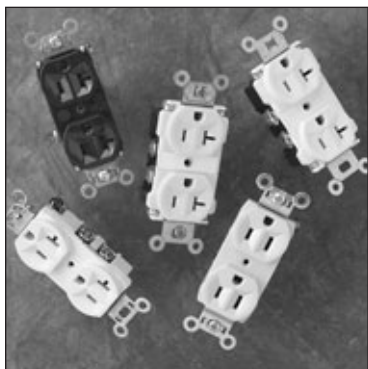

STRAIGHT BLADE RECEPTACLES

- Extra Heavy-Duty
- Heavy-Duty
- Commercial Grade

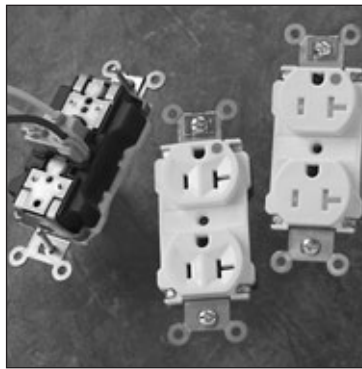


PLUGTAIL™ DEVICES

- Extra Heavy-Duty Hospital Grade Receptacles
- Heavy-Duty Hospital Grade Receptacles
- Extra Heavy-Duty Receptacles



DECORATOR DEVICES

- Construction Grade Switches
- Construction Grade Illuminated & Pilot Lighted Switches
- Construction Grade Receptacles
- Commercial Grade Receptacles
- Construction Grade Hallway Lights

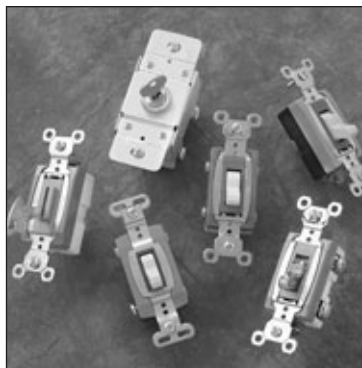

SWITCHES

- Heavy-Duty Toggle
- Heavy-Duty Lighted Toggle
- Heavy-Duty Security
- Heavy-Duty Locking
- Construction Grade Toggle
- Commercial Grade Toggle



GFCIs

- Construction Grade with Auto-Ground
- Construction Grade
- Construction Grade Dead Front



WALL PLATES

- TradeMaster® Thermoplastic Nylon
- Stainless Steel
- Brass
- Aluminum
- Dustproof Stainless Steel Covers

Also available...

- Light Almond Devices
- Hospital Grade Devices
- TVSS & Isolated Ground Devices
- Ground Continuity Monitoring (GCM)
- Straight Blade Plugs & Connectors
- Turnlok® Locking Devices
- Weatherproof Boxes & Covers
- IEC 309 Industrial Products
- Flexcor® Wire Mesh Grips
- Configurable Solutions



Legrand/Pass & Seymour
P.O. Box 4822
Syracuse, NY 13221-4822
800-223-4185

North America Headquarters
60 Woodlawn Street
West Hartford, CT 06110
Phone: 1.877.BY.LEGRAND (295.3472)
Fax: 1.860.232.2062
www.legrand.us

Legrand Canada
570 Applewood Crescent
Vaughan, ON, L4K 4B4
Phone: 905.738.9195
Fax: 905.738.9721
www.legrand.ca

SF303R1 — Updated January 2004 — For latest specs visit www.legrand.us/passandseymour