



## PASS & SEYMOUR® Commercial Specification Grade Receptacles Tamper-Resistant 15 & 20A, 125V

TR5252, TR5352

### Safety- & code-driven solutions brought to you by Legrand®.

Corrosion-resistant plated-steel mounting strap, durable nylon faces, and triple-wipe power contacts combine with tamper-resistant shutters to deliver safe and reliable performance. Tamper-resistant feature helps you comply with 2014 NEC® Article 406.12 and get the job done right. Screw-pressure-plate back wiring ensures easy installation and excellent electrical connections. These UL listed receptacles are ideal for residential, multi-dwelling, commercial office, and hospitality applications.



#### FEATURES & BENEFITS

**Dual mechanical shutter system** to help prevent insertion of foreign objects.

**Auto-ground clip** assures positive ground.

**Easily accessed break-off, line-contact connecting tab** for fast, easy split-circuit wiring.


**Backed-out tri-drive steel terminal screws** for faster installation.

**Corrosion-resistant, plated steel strap.**

**.032 inch thick brass triple-wipe power contacts** for lasting retention.

**Impact-resistant nylon face** for durability.

**Internal screw-pressure-plate back and side wire capability.** Two back wire holes for more wiring flexibility.

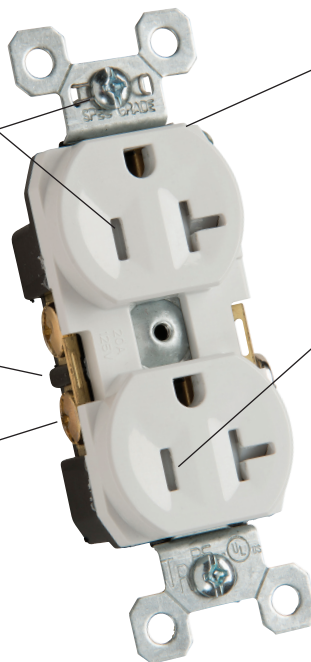

TR5352W

#### FIELD USES / VERTICAL MARKETS

■ Residential   ■ Hospitality/Lodging   ■ Retail   ■ Multiple Dwelling   ■ Office



## PASS & SEYMOUR®

### Commercial Specification Grade Receptacles Tamper-Resistant 15 & 20A, 125V

#### ORDERING INFORMATION

| Catalog Number                                 | Rating<br>A | V    | Color        | NEMA<br>Configuration No. |
|------------------------------------------------|-------------|------|--------------|---------------------------|
| <b>Duplex Receptacles Back &amp; Side Wire</b> |             |      |              |                           |
| TR5252I                                        | 15A         | 125V | Ivory        | 5-15R                     |
| TR5252W                                        | 15A         | 125V | White        | 5-15R                     |
| TR5252                                         | 15A         | 125V | Brown        | 5-15R                     |
| TR5252GRY                                      | 15A         | 125V | Gray         | 5-15R                     |
| TR5252BKG                                      | 15A         | 125V | Black        | 5-15R                     |
| TR5252RED                                      | 15A         | 125V | Red          | 5-15R                     |
| TR5252LA                                       | 15A         | 125V | Light Almond | 5-15R                     |
| TR5352I                                        | 20A         | 125V | Ivory        | 5-20R                     |
| TR5352W                                        | 20A         | 125V | White        | 5-20R                     |
| TR5352                                         | 20A         | 125V | Brown        | 5-20R                     |
| TR5352GRY                                      | 20A         | 125V | Gray         | 5-20R                     |
| TR5352BKG                                      | 20A         | 125V | Black        | 5-20R                     |
| TR5352RED                                      | 20A         | 125V | Red          | 5-20R                     |
| TR5352LA                                       | 20A         | 125V | Light Almond | 5-20R                     |



NEMA  
5-15R



NEMA  
5-20R

For more information on these and other P&S products refer to our Catalog or visit our web site.

# PASS & SEYMOUR®

## Commercial Specification Grade Receptacles

### Tamper-Resistant 15 & 20A, 125V



#### TECHNICAL INFORMATION

##### 3rd Party Compliance

UL Listed, File Number E140596, Standard UL498  
CSA/CUL approved, Standard CSA-C22.2 No. 42  
Conforms to NEMA WD-1 and WD-6

##### Performance

###### Electrical


|                              |                                                                                                                              |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Dielectric Withstand Voltage | Withstands 2000V minimum                                                                                                     |
| Maximum Working Voltage      | 250V                                                                                                                         |
| Current Interrupting         | Certified for current interrupting at full-rated current                                                                     |
| Temperature Rise             | Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current |

###### Mechanical

|                         |                                                                         |
|-------------------------|-------------------------------------------------------------------------|
| Terminal Identification | Terminal Identification in accordance with UL 498 (Brass, White, Green) |
| Terminal Accommodation  | #14 AWG - #10 AWG copper conductor only.                                |
| Product Identification  | Ratings are permanent part of the device                                |

###### Environmental

|                       |                                                        |
|-----------------------|--------------------------------------------------------|
| Flammability          | UL94 V2                                                |
| Operating Temperature | Maximum continuous +60°C, minimum -40°C without impact |

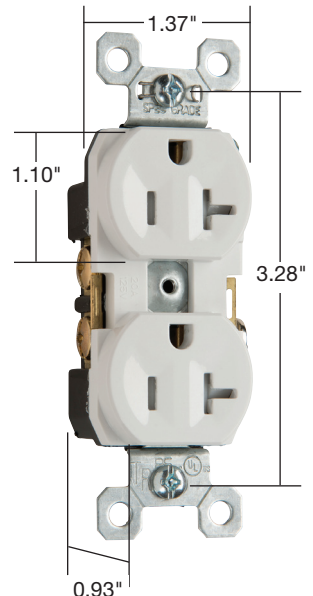


##### Materials

|                           |                                                          |
|---------------------------|----------------------------------------------------------|
| Face                      | Nylon                                                    |
| Back Body                 | Nylon                                                    |
| Line Contacts             | .032 260 Brass                                           |
| Mounting Strap            | .042 Zinc-Plated Steel                                   |
| Ground Contacts           | .040 260 Brass                                           |
| Pressure Plate            | .080 Steel                                               |
| Tamper-Resistant Shutters | Thermoplastic                                            |
| Terminal Screws           | #8 Tri-Drive Steel (Neutral = Nickel-Plated Steel)       |
| Ground Screw              | #8 Hex Tri-Drive Steel; Zinc Coating with Green Chromate |
| Auto-Ground Clip          | Stainless Steel                                          |
| Mounting Screws           | Tri-Drive Steel                                          |

##### Warranty


1 Year

## COMPLEMENTARY DEVICES & ACCESSORIES

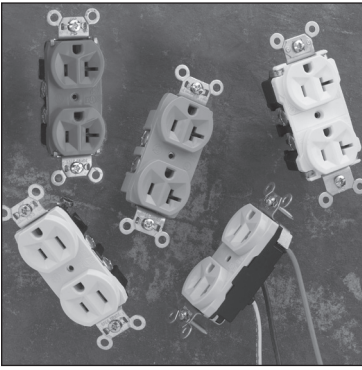

### STRAIGHT BLADE RECEPTACLES

- Extra Heavy-Duty
- Heavy-Duty
- Hard Use
- Construction Grade
- Construction Grade Leaded
- Commercial Grade

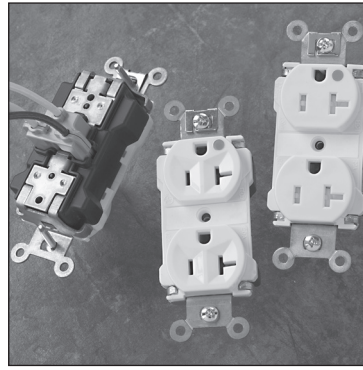


### PLUGTAIL™ DEVICES

- Extra Heavy-Duty SpecGrade
- Extra Heavy Duty Hospital Grade
- Extra Heavy-Duty Tamper-Resistant
- Extra Heavy-Duty Tamper-Resistant Hospital Grade




### DECORATOR DEVICES

- Construction Grade Switches
- Specification Grade Combo Switches
- Construction Grade Receptacles
- Commercial Grade Receptacles
- Specification Grade Hallway Lights

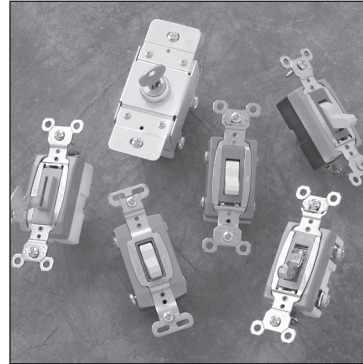

### SWITCHES

- Extra Heavy-Duty
- Extra Heavy-Duty Lighted
- Extra Heavy-Duty Security
- Extra Heavy-Duty Locking
- Hard Use
- Commercial Grade

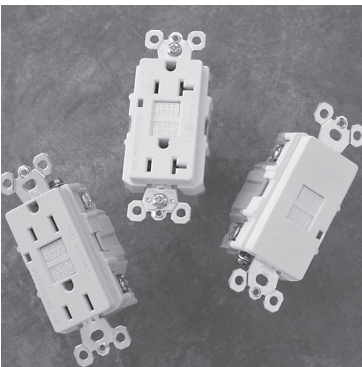

### GFCIs

- Specification Grade
- Hospital Grade
- PlugTail™



### WALL PLATES

- TradeMaster® Thermoplastic Nylon
- Screwless Polycarbonate
- Stainless Steel
- Brass
- Aluminum
- Dustproof Stainless Steel Covers

## ALSO AVAILABLE...

- |                                 |                                      |                               |                               |
|---------------------------------|--------------------------------------|-------------------------------|-------------------------------|
| ■ Hospital Grade Devices        | ■ Ground Continuity Monitoring (GCM) | ■ Turnlok® Locking Devices    | ■ IEC 309 Industrial Products |
| ■ PlugTail™ Devices             | ■ Straight Blade Plugs & Connectors  | ■ Weatherproof Boxes & Covers | ■ Flexcor® Wire Mesh Grips    |
| ■ SPD & Isolated Ground Devices |                                      |                               |                               |



#### Electrical Wiring Systems

P.O. Box 4822  
Syracuse, NY 13221-4822  
Phone: 1.800.776.4035  
[www.legrand.us/passandseymour](http://www.legrand.us/passandseymour)

570 Applewood Crescent  
Vaughan, Ontario L4K 4B4  
Phone: 905.738.9195  
[www.legrand.ca](http://www.legrand.ca)