



Save Money



Save Time



Peace of Mind


The ST LED strip now features 0-10V dimming on most standard stock items. Use the ST to replace fluorescent strip lights for increased energy savings and rebates. The ST comes with a continuous row mount aligner, tool-less channel cover, universal voltage driver, 3500, 4000 or 5000K CCT options and a five year warranty.



ST Linear LED Strip

Available with 0-10V Dimming

Metalux

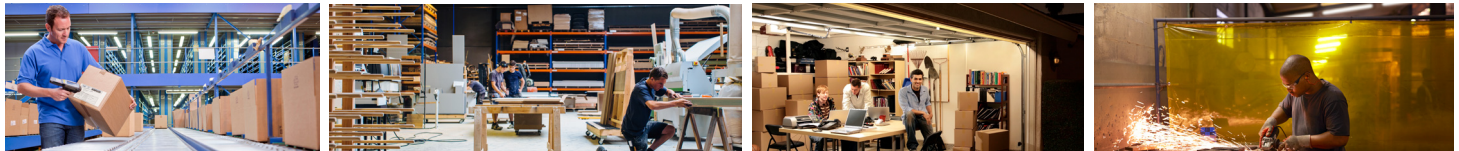

	Features	Benefits	Result
Construction	Full length and standard width channel design	No painting required. Ideal for any retrofit LFL project	✓
	Tool-less channel cover, integrated LEDs and wireless access from below	Simple install and maintenance for life of product	⌚
	Surface, chain or toggle mount	Ideal for new construction or retrofit	⌚
	Continuous row mount aligner included	Add-on length as needed regardless of application or layout	\$
Performance	0-10V Dimming, 4000K, Double lens	Additional savings and control; DLC Utility Rebate qualified	\$
	Up to 118 lm/W, 3500K, 4000 or 5000K CCT options	Save over 40% energy over existing LFL strips	\$
	Classic single or double lens tube appearance	One for one replacement of 2 or 4-lamp LFL strips	✓
	DLC®, 5-year warranty, 50K life hours at L70	Certified and guaranteed performance	⌚

0-10V Low Voltage Dimming *

Catalog Number	UPC	CCT (K)	Delivered lumens	Watts	Efficacy (lm/W)	Controls	Unit Weight lbs.	Units per pallet	Gross wt. pallet
2ST2L2040	080083150960	4000	2300	20	115	0-10V Dimming	1.0	180	267
4ST2L4040	080083150984	4000	4600	40	115	0-10V Dimming	2.9	150	612
8ST2L8040	080083151004	4000	9200	80	115	0-10V Dimming	3.8	150	701

* DLC 5.1 compliant

Non-Dimming **

Catalog Number	UPC	CCT (K)	Delivered lumens	Watts	Efficacy (lm/W)	Controls	Unit Weight lbs.	Units per pallet	Gross wt. pallet
2ST1L1040R	080083838165	4000	1165	10	119	Non-Dimming	0.7	288	391
2ST2L2040R	080083838172	4000	2298	19	118	Non-Dimming	1.0	180	267
2ST2L2050R	080083890583	5000	2260	20	116	Non-Dimming	1.0	180	267
4ST1L2040R	080083838189	4000	2153	20	109	Non-Dimming	1.1	252	387
4ST2L4040R	080083838196	4000	4433	39	113	Non-Dimming	2.9	150	612
4ST2L4050R	080083890620	5000	4790	39	123	Non-Dimming	2.9	150	612
8ST2L8040R	080083838202	4000	8913	81	110	Non-Dimming	3.8	150	701
8ST2L8050R	080083890644	5000	9412	81	117	Non-Dimming	3.8	150	701
4ST2L4035R	080083890729	3500	4542	40	114	Non-Dimming	2.9	150	612

** Energy Star compliant or DLC 5.0 compliant



Cooper Lighting Solutions
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.cooperlighting.com

Canada Sales
5925 McLaughlin Road
Mississauga, Ontario L5R 1B8
P: 905-501-3000
F: 905-501-3172

© 2021 Cooper Lighting Solutions
All Rights Reserved
Printed in USA
Publication No. SA519041EN
November 15, 2021 4:20 PM