

WIREMOLD®

Steel Raceway

The Industry Standard In Two-Piece Steel Raceway Available Factory Prewired

4000® Series Raceway is the work horse of surface raceway systems. 4000 Series Raceway can be divided for multi-service applications making it ideal for applications requiring a large cable capacity and dual-service requirements. Commercial, institutional, and industrial applications benefit from the rigid steel construction and durable ScuffCoat™ finish of this raceway. 4000 Series Raceway is also ideal for municipalities that have code requirements calling for all steel construction or that prohibit nonmetallic cable management systems.



4000 Series Raceway Used in a training room application.


FEATURES & BENEFITS

- New 4075D Series Bridge Fittings. Provides ability to bridge over existing 4000, 2400, 700, and 500 Series Raceways.
- New 4047 Faceplates. One-piece device bracket with overlapping cover design that hides bad cuts and unsightly seams where device plates abut raceway covers.
- New 4047-2 Faceplates. Same great features as the 4047 faceplates, but now available in a double-wide 4-gang version.
- 4047 faceplates available with pre-pigtailed receptacle installed. 20A heavy duty commercial grade duplex receptacle with 12" [305mm] pigtailed pre-installed in the device bracket. Saves time and labor.
- FiberReady 2" [51mm] Fiber Optic Radius fittings. UL and cUL verified and exceed the recommendations of TIA/EIA 569A. Available as full capacity fittings or inserts to be used for existing installations.
- Large cross section area. Provides ample space for large wiring requirements.
- Complete line of fittings. Provides complete wiring solution and allows for interconnection between raceway systems.
- Gray baked enamel and Ivory ScuffCoat™ finish. Durable ivory Scuffcoat finish makes a scratch resistant surface.
- Feeder or header system. Ideal for overhead, open spaces and under raised floor applications.
- Pre-cut covers. For mounting devices on various centers without cutting the covers. Use with 4046, 4047, 4048, 4007, and 4049 Series device plates.
- 4050 nonmetallic device plates. Overlapping design offers an aesthetically pleasing way to cover seams. Available in gray or ivory.

- Base and cover cutters. Manually operated cutters are lightweight and portable. Cutters offer labor savings for any size job and maintain a factory clean and square end cut.
- Available prewired. Manufactured to specified job site lengths and ready to install. Jobs can be packaged by area, floor, or building and shipped per job site requirements.
- Simple prewired ordering. Provide us with marked-up electrical drawings and electrical/communications specifications and shipments can begin within three to four weeks or less for most jobs.
- Datacom connectivity options. Accepts industry standard and proprietary devices from a wide range of manufacturers to provide a seamless and aesthetically pleasing interface for voice, data, audio, and video applications at the point of use.
- UL5 and ADA compliant. Raceway and fittings meet UL5 standards and can be installed in conformance with ADA requirements.
- **UL Listed multioutlet assemblies.** File E68073 Guide PVGT. Fittings: File E121188 Guide RJPR. Meets Article 380 of NEC and meets Section 12-3023 of CEC.
- cULus Listed Surface Metal Raceway System. File E4376 Guide RJBT. Fittings: File E41751, Guide RJPR. Meets Article 386 of NEC and meets Section 12-1600 of CEC.



Now compatible with A/V devices.

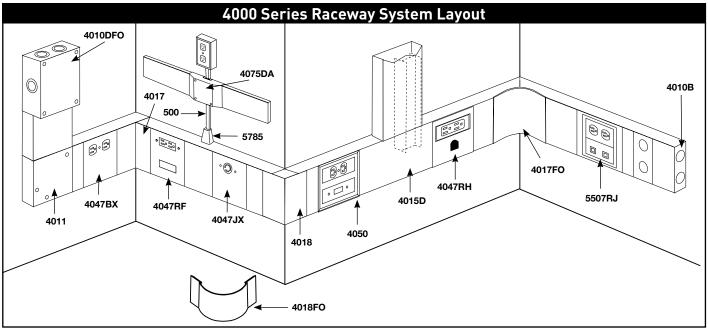

NOTE: Illustration is for showing product applications only.

	4000 Series Racewa
Catalog No./Item	Description/Specifications
74000B-10 G4000B-10	Base – .050" galvanized steel Packed five 10' [3.050m] lengths per carton. Base has two 9/32" [7.1mm] diameter KOs on centers of approximately 18" [457mm] throughout.
[121mm] V4000C G4000C 4 3/4" [121mm]	Cover – .040" [1.0mm] galvanized steel. Packed ten 5' [1.5mm] lengths per carton.
V4000C075 G4000C075	7.5" [191mm] Pre-Cut Cover – For mounting devices on 12" [305mm] centers with 4007, 4046, 4047, 4048, and 4050 Series plates.
4 3/4" [121mm]	Spacing will be 12 1/4" [311mm] with 4050.
V4000C135 G4000C135	13.5" [343mm] Pre-Cut Cover – For mounting devices on 18" [457mm]
4 3/4" [121mm]	centers with 4007, 4046, 4047, 4048, and 4050 Series plates. Spacing will be 18 1/4" [464mm] with 4050.
V4000C195 G4000C195	19.5" [496mm] Pre-Cut Cover – For mounting devices on 24" [610mm] centers with 4007, 4046, 4047, 4048, and 4050 Series plates. Spacing will be 24 1/4" [616mm] with 4050.


4000 Series Raceway Fittings Ordering Information

Catalog No./Item

Description/Specifications



Wire Clip (Plated) - For holding conductors in place.



Coupling (Galvanized Steel Plated) - For joining lengths of G4000B. Sold in pairs.

4011DRI



2" [51mm] Radius Insert for **Divided Flat Elbow** – Insert for V/G4011 Flat Elbow that provides a 2" [51mm] bend radius for UTP/STP or fiber optic cable installations.

4015DRI



2" [51mm] Radius Insert for Divided Tee - Insert for V/G4015D Divided Tee that provides a 2" [51mm] bend radius for UTP/STP or fiber optic cable installations.

4011/15RI




2" [51mm] Radius Corner Insert - Insert for V/G4015 Undivided Tee that provides a 2" [51mm] bend radius for UTP/STP or fiber optic cable installations.

4017/18RI




2" [51mm] Radius Insert for Internal/External Elbows -Insert for V/G4017 Internal Elbow and for V/G4018 External Elbow that provides a 2" [51mm] bend radius for UTP/STP or fiber optic cable installations.

4001DA



Divider Clip (Plated) -Required for holding G4000D Divider in place. Use one every 2 1/2' [0.762m].

V4010B G4010B



Blank End – For closing open end of 4000 Base. Has two 1/2" trade size KOs.

Catalog No./Item



Description/Specifications

Divided Entrance End Fitting Has concentric 3/4", 1", and 1 1/4" trade size KOs on end and bottom for feeding 4000 Raceway. Furnished with removable divider and 1 1/4" [32mm] bend radius controlled insert.

V4011FO G4011FO 1 3/4" [44mm]


8 3/4" [222mm]

FiberReady 2" [51mm] Radius Full Capacity Flat Elbow – A 90° flat corner for divided and undivided applications for new lay-in or pull-through installations.

V4011 [121mm] G4011 1 3/4" [44mm]

Flat Elbow - For right angle turns on the same surface.


V4012TX



Internal or External 45° Elbow - Can also be assembled as an inverted 45° elbow.


NOTE: Shown assembled as internal elbow.

V4014A G4014A




Wall Box Connector - Base has two concentric 1/2", 3/4", 1", and 1 1/4" trade size KOs, and two rectangular 2 9/16" x 1 11/16" [65mm x 43mm] KOs.

V4015 G4015




Full Capacity Tee - For undivided raceway only. Join to raceway run with G4001 Couplings (not furnished).

V4015D G4015D



Divided Tee - For divided raceway only. Join to raceway run with G4001 Couplings (not furnished).

V4015FO G4015FO



FiberReady 2" [51mm] Radius Full Capacity Tee -


A full capacity undivided tee fitting. For new lay-in or pull-through installations.

4000 Series Raceway Fittings Ordering Information (continued) Catalog No./Item **Description/Specifications** V4015DFO FiberReady 2" [51mm] G4015DFO Radius Full Capacity Tee -A full capacity divided tee fitting. For new lay-in or 1 3/4 pull-through installations. 12 3/4" [229mm] [324mm] V4017FO FiberReady 2" [51mm] 3 3/4" G4017FO Radius Full Capacity Internal [95mm] Elbow - Full capacity 90° internal corner for divided or undivided applications. For new installations. 3 1/8" V4017 Internal Elbow - For 90° G4017 internal corners. Fiber 1 1/2" bushing included. [38mm] V4017N Inverted Internal Elbow -1 1/4" G4017N For connecting a vertical [32mm] run of 4000 Raceway with a horizontal overhead run with its cover facing up. 4 21/32" [118mm] V4018FO FiberReady 2" [51mm] 2 1/4" G4018FO **Radius Full Capacity** [57mm] External Elbow - Use in divided or undivided applications. For new lay-in or pull-through installations. 4 11/16" V4018 External Elbow - For 90° [119mm] G4018 external corners. 4 1/8" 9 1/2" G4074A **Take-Off Connector** [242mm] (4000 to 3000) - For connecting a 90° tee at 1 5/8" any point along a run of [41mm] 4000 Raceway. [124mm] G4086A Panel Connector - For 1 1/2" [38mm] connecting 4000 Raceway with surface type panel boxes. Accommodates maximum wire capacity of 4000 System. C-shaped flange covers

[5.6mm]


5 5/32"

uneven cuts to the box.

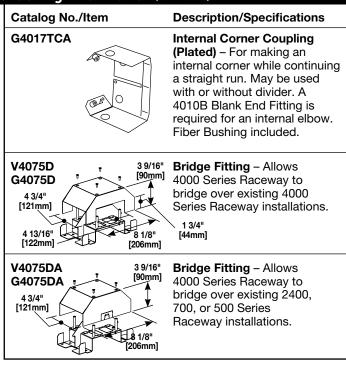

* Faceplates can also be used with 6000 Series Raceway. Add "C" prefix to denote Canadian version - Agency approved for sale in Canada.®

4000 Series Raceway Cutters				
Catalog No./Item		Description/Specifications		
640B		Base Cutter – Portable base cutter. Steel constructed provides clean and easy square cuts. Manual operation required.		
640BDK		Replacement Blade Kit – Replacement blade and die set for 640B Cutter.		
640C		Cover Cutter – Portable cover cutter. Steel constructed provides clean and easy square cuts. Manual operation required.		
640CDK		Replacement Blade Kit – Replacement blade and die set for 640C Cutter.		

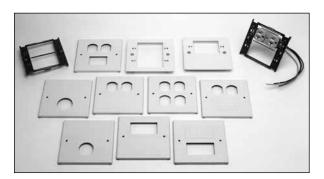

New 4047 Faceplates accommodate a wide range of power and communications applications.

4047 Series Cover Plates Ordering Information

Catalog No./Item

Description/Specifications

V4047AX G4047AX 4 3/4" [121mm] 5 1/8" [130mm]

Two-Gang Overlapping Cover Single Round Opening For straight blade and locking

single receptacles with face diameters of 1.38" to 1.39" [35mm to 36mm].

V4047BX G4047BX 4 3/4" [121mm] 5 1/8' [130mm]

Two-Gang Overlapping Cover Duplex Receptacle -

For 15A and 20A duplex receptacles. Accepts 106 Communications Duplex Frame.



Two-Gang Overlapping Cover Two Duplex Receptacles -

For 15A and 20A duplex receptacles. Accepts 106 Communications Duplex Frame.




Two-Gang Overlapping Cover Duplex & Modular Furniture -

For 15A and 20A duplex receptacles. Includes combination Modular Furniture and two Keystone twistouts. Accepts modular furniture adapter, 106 Communications Duplex Frame or RJ45.



Two-Gang Overlapping Cover Duplex & 2A Mini adapter -

For 15A and 20A duplex receptacles. Includes Mini adapter. Accepts 106 Communications Duplex Frame, Activate inserts & Wiremold Open System Communication Modules.



Two-Gang Overlapping Cover Duplex & Series II Mini Adapter -

For 15A and 20A duplex receptacles. Includes Mini adapter. Accepts 106 Communications Duplex Frame or one Ortronics® Series II Communications Insert.



Two-Gang Overlapping Cover Duplex & TracJack Mini Adapter -

For 15A and 20A duplex receptacles. Includes Mini adapter. Accepts 106 Communications Duplex Frame or two Ortronics® TracJack Communications Inserts.


Catalog No./Item

V4047C-1 G4047C-1 4 3/4" [121mm] 5 1/8"

[130mm]

Description/Specifications

One-Gang Overlapping Device Plate - Use with commercially available single-gang flush plate (sold separately).



Two-Gang Overlapping Device Plate - Use with commercially available two-gang flush plate (sold separately).

V4047JX G4047JX 4 3/4" [121mm]

5 1/8"

[130mm]

Two-Gang Overlapping Cover Single Round Opening

For straight blade and single locking receptacles with face diameters or 1.56" - 1.58" [39mm - 40mm].



Two-Gang Overlapping Cover Rectangle Opening - For rectangular GFCI, Surge and decorator style devices. Does not

accept 5507 Series Faceplates.



Two-Gang Overlapping Cover **Rectangle Opening & Modular** Furniture - For rectangular GFCI, Surge and decorator style devices. Does not accept 5507 Series Faceplates. Accepts modular furniture adapter and RJ45.



Two-Gang Overlapping Cover with One Duplex Receptacle Installed - Includes one Pass & Seymour Duplex Receptacle with 12" wire leads installed on bracket.

NOTE: Faceplates can also be used with 6000 Series Raceway.


♣ Add "C" prefix to denote Canadian version – UL Listed to U.S. and Canadian Safety Standards. 🐠

4047 Series Cover Plates Ordering Information (continued)

Catalog No./Item

Description/Specifications

V4047WF G4047WF ...



Two-Gang Overlapping Cover with One Duplex Installed & Modular Furniture Opening -Includes one Pass & Seymour

20 A Duplex Receptacle with 12" wire leads installed on bracket. Includes combination Modular Furniture and 2 Keystone Twist Out. Accepts modular furniture adapter and RJ45.


V4047WM G4047WM



Two-Gang Overlapping Cover with One Duplex Installed & Activate Mini adapter -

Includes one Pass & Seymour 20A Duplex Receptacle with 12" wire leads installed on Bracket. Includes Mini adapter. Accepts Activate inserts & Wiremold Open System Communication Modules.


V4047WS G4047WS



Two-Gang Overlapping Cover with One Duplex Installed & Series II Mini adapter -

Includes one Pass & Seymour 20A Duplex Receptacle with 12" wire leads installed on Bracket. Includes Mini adapter. Accepts one Ortronics® Series II Communications insert.


V4047WT G4047WT.



Two-Gang Overlapping Cover with One Duplex Installed & TracJack Mini adapter -

Includes one Pass & Seymour 20A Duplex Receptacle with 12" wire leads installed on Bracket. Includes Mini adapter. Accepts two Ortronics® TracJack Communications inserts.

V4047-2BBBB G4047-2BBBB



Four-Gang Overlapping Cover Four Duplex Openings - For 15A and 20A duplex receptacles. Accepts 106 Communication Duplex Frame.

V4047-2BBFF. G4047-2BBFF 4 3/4" [121mm]

9 1/2 [241mm] Four-Gang Overlapping Cover Two Duplex & Two Modular Furniture Openings - For 15A and 20A duplex receptacles. Includes combination Modular Furniture & two Keystone Twistouts. Accepts 106 Communication Duplex Frame, RJ45 or modular furniture adapter.

Catalog No./Item


V4047-2BBMM G4047-2BBMM



Description/Specifications


Four-Gang Overlapping Cover **Two Duplex & Two Activate Mini** Adapters - For 15A and 20A duplex receptacles. Includes Mini adapter. Accepts 106 Communication Duplex Frame, Activate inserts & Wiremold Open System Communications Modules.

V4047-2BBSS G4047-2BBSS



Four-Gang Overlapping Cover Two Duplex & Two Series II Mini Adapters - For 15A and 20A duplex receptacles. Includes Mini adapter. Accepts 106 Communication Duplex Frame or one Ortronics® Series II Communication insert.

V4047-2BBTT G4047-2BBTT



Four-Gang Overlapping Cover Two Duplex & Two TracJack Mini Adapters – For 15A and 20A duplex receptacles. Includes Mini adapter. Accepts 106 Communication Duplex Frame or two Ortronics® TracJack Communications inserts.

V4047-2BBXX G4047-2BBXX




Four-Gang Overlapping Cover with Two Duplex Openings - For 15A and 20A duplex receptacles. Accepts 106 Communication Duplex Frame.

V4047-2RRXX.** G4047-2RRXX



Four-Gang Overlapping Cover Two Rectangular Openings – For rectangular, GFCI, Surge and decorator style devices. Does not accept 5507 Series Faceplates.

V4047-2WWFF G4047-2WWFF





Four-Gang Overlapping Cover Two Duplex Installed & Two **Modular Furniture Openings -**

Includes two, Pass & Seymour 20A Duplex Receptacles with 12" wire leads installed on Bracket. Includes combination Modular Furniture & four keystone Twistouts. Accepts modular furniture adapter or RJ45.

NOTE: Faceplates can also be used with 6000 Series Raceway.

Add "C" prefix to denote Canadian version - UL Listed to U.S. and Canadian Safety Standards. @ ...

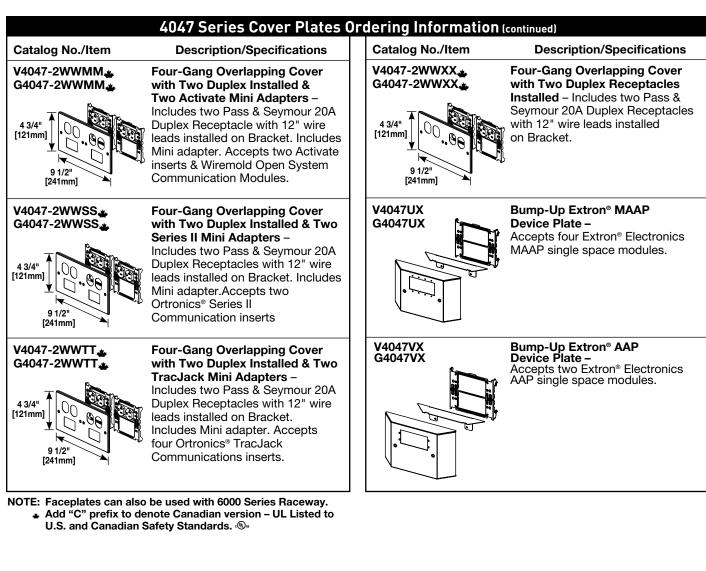

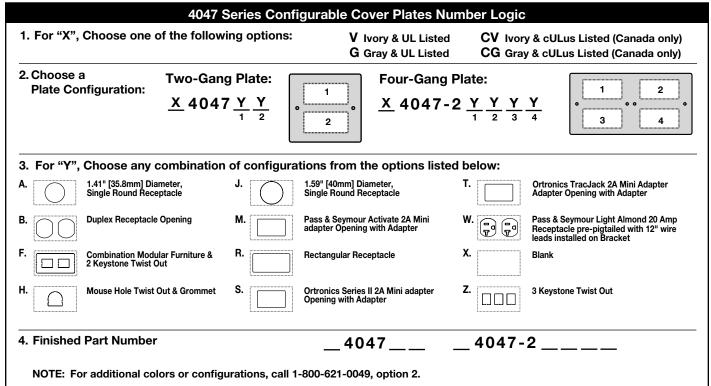


4000 Series Raceway Faceplates Ordering Information **Description/Specifications** Catalog No./Item V4046H-2 Tap-Off Fitting - Has four G4046H-2 concentric 1/2" and 3/4" trade 4 3/4" [121mm] size KOs. V6007C-1ff Single-Gang Device Cover -G6007C-1ff For vertical mounting of single-gang devices on undivided raceway. Accepts commercially available 2 1/2" [64mm]

2 7/8" [73mm]

[48mm]

wall plate. (sold separately)

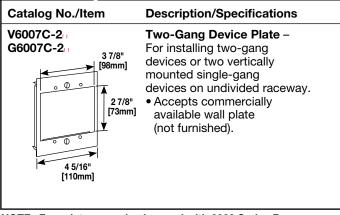

NOTE: Faceplates can also be used with 6000 Series Raceway. ▲ Add "C" prefix to denote Canadian version – UL Listed to U.S. and Canadian Safety Standards.

talog No./Item	Description/Specifications	Catalog No./Item	Description/Specifications
RA-S2	Angled Raceway Adapter – For use with multi-channel raceway device brackets and WallSource device mounting brackets. Angled exit provides additional mounting depth required for A/V connections as well as ensuring the required bend radius for UTP and fiber optic cabling. Holds two Ortronics®	CM-EPLA*	End Plates – Includes two outle identification labels with clear covers and two matching screw covers. Required for mounting F & Seymour Activate and Wirema Open System communication modules into 4050 Series device brackets.
	Series II modules.Fits 5507 Series Faceplate opening.	S2-EPL*	End Plates – Includes two outle identification labels with clear coand two matching screw covers.
CM-ARA	Angled Raceway Adapter – For use with multi-channel raceway device brackets and WallSource device mounting brackets. Angled exit provides additional mounting depth required for A/V connections as well as ensuring the required bend radius for UTP and fiber optic cabling. Holds two CM2 Series		Required for mounting Ortronics Series II modules into 4050 Serie device brackets.
	modules or two Pass & Seymour® 2A inserts. Fits 5507 Series Faceplate opening.		