

Models:

APUV1/APUV2/APUV5/APUV8

Ultraviolet Water Sterilizers

Spec # _____

Quantity _____

Applications:

- Bacteria Sterilization
- Sanitization



At a Glance:

- Wide range of flow rates
- Electronic ballast featuring open-loop current control, detachable power cord, audible alarm, and power-on indicator
- High output, low pressure mercury vapor lamps with high isolation design
- Easy to service


Product Benefits:

- Various flow rates accommodate a variety of applications from point of use drinking water systems to whole house
- Electronic ballast runs smoother, creates less heat, and is able to handle variances in power supply without shutting down the unit
- UV lamps can be changed on the fly, no need to disconnect water flow
- Helps provide maximum exposure of bacteria and viruses to UV light at rated flow rate
- Premium, quality materials to help provide the optimum conditions for consistent performance
- Compact design incorporating 304 stainless steel reactor chambers, polished for laboratory or medical applications

Product Specifications:

Model No. (Part No.)	Flow Rate	Dimensions		Shipping Weight	Electrical			Operating Pressure	Ambient Temp.	Quartz Sleeve	Inlet/Outlet Port Size	Visual "Power-On"	Audible Lamp Failure	
		Length	Cell Diameter		Voltage	Power Consumption	Lamp							
APUV1 (56058-01)	1 gpm (3.8 lpm)	15" (38.1 cm)	2-1/2" (6.4 cm)	5 lbs. (2.3 kg)	100-130V (50-60 Hz)	16 Watts	14 Watts	125 psi (862 kPa)	36-100°F (2-37.8°C)	Yes	1/4" MNPT	Yes	Yes	
APUV2 (56058-02)	2 gpm (7.5 lpm)	18-1/2" (47 cm)	2-1/2" (6.4 cm)	8 lbs. (3.6 kg)		19 Watts	17 Watts							1/2" MNPT
APUV5 (56058-03)	5 gpm (18.9 lpm)	22" (56 cm)	2-1/2" (6.4 cm)	12 lbs. (5.4 kg)		26 Watts	24 Watts							3/4" MNPT
APUV8 (56058-04)	8 gpm (30.3 lpm)	35-1/2" (90 cm)	2-1/2" (6.4 cm)	18 lbs. (8.2 kg)		39 Watts	36 Watts							3/4" MNPT

Aqua-Pure®

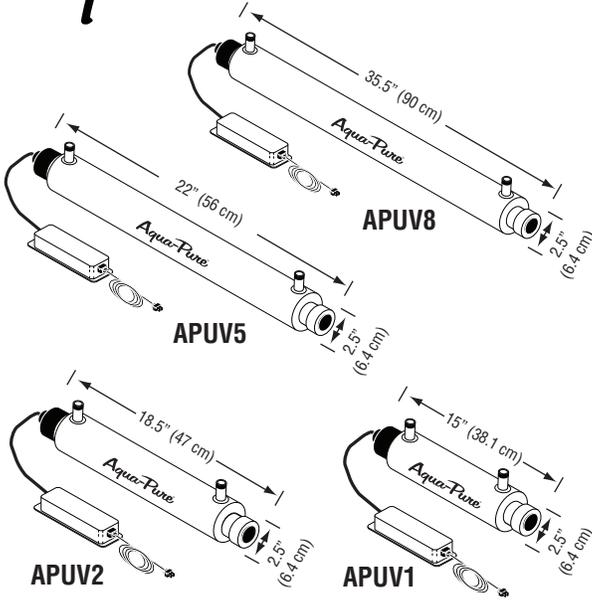

Spec # _____

Quantity _____

Model Number _____


Part Number _____

Physical Specifications:

- System has a maximum operating temperature of 100°F (37.8°C) and a maximum pressure of 125 psi (862 kPa)
- System to be installed at point of entry or point of use

Easy Installation:

CAUTION: Diagram shown is for reference purposes only. Read installation and operation manual prior to installing the unit.

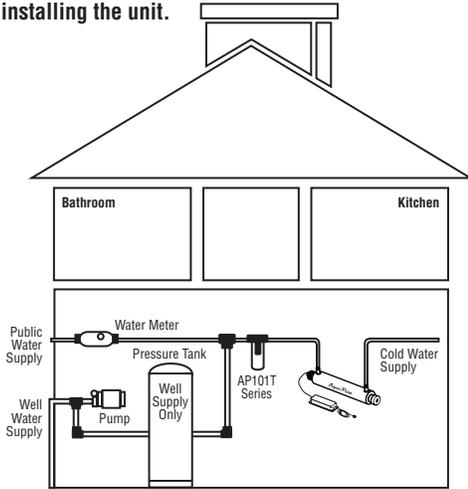

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

CUNO Incorporated recommends regularly scheduled maintenance and replacement of the filter cartridge(s) in order for the product to perform as advertised/sold. **Replace UV lamp at least every 12 months.** Improper installation and maintenance may result in property damage due to water leakage.

Limited Warranty:

CUNO Incorporated warrants the ultraviolet water sterilizer's hardware and electrical systems to be free from defects in material and workmanship for five (5) years from the date of purchase. CUNO Incorporated warrants ultraviolet lamps to be free from defects in material and workmanship for one (1) year from the date of purchase and the chamber for a period of seven (7) years from the date of purchase. This warranty does not cover failures resulting from abuse, misuse, alteration or damage not caused by CUNO or failure to follow installation and use instructions. If the Product is defective CUNO will replace the Product or refund your Product purchase price. CUNO will not be liable for any indirect, special, incidental, or consequential damages arising from the use of this Product. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation may not apply to you. To obtain warranty service, mail your request to Warranty Claims, CUNO Incorporated, 400 Research Parkway, Meriden, CT 06450. Proof of purchase (original sales receipt) must accompany the warranty claim, along with a complete description of the Product, model number and alleged defect. This warranty gives you specific legal rights and you may have other rights which vary from state to state, or country to country.

Distributed by:

3M is a trademark of 3M Company.
 CUNO and Aqua-Pure are trademarks of 3M Company used under license.
 © 2009 3M Company. All rights reserved.
 LITAP684 1207
 70-0201-9262-4



CUNO Incorporated
 400 Research Parkway
 Meriden, CT 06450 U.S.A.
 Toll Free: 1.800.222.7880
 Worldwide: 203.237.5541
 Fax: 203.238.8701
 www.aquapure.com • www.cuno.com