



Hubs and Bulkhead Fittings

Offset Reducers

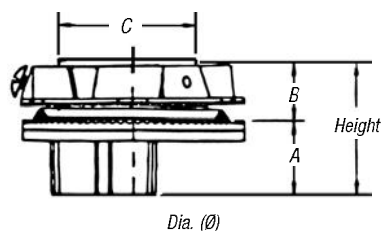

CAT. NO.	TRADE SIZE	HEIGHT	DIA. (Ø)	(IN.)				
				A	B	C	D	E
H150-TB0750RGR	1½"-¾"	1⅝"	2¾"	1⅞"	2⅜"	1⅝"	1⅞"	1⅞"
H150-TB1000RGR	1⅝"-1"	1⅝"	2¾"	1⅞"	2⅜"	1⅝"	1⅞"	1⅞"
H150-TB1250RGR	1⅝"-1¼"	1⅝"	2¾"	1⅞"	2⅜"	1⅝"	1⅞"	1⅞"
H250-TB2000RGR	2½"-2"	2⅞"	3¾"	1⅞"	1⅞"	2⅝"	2⅝"	3⅜"

Material — Offset Reducer and Locknut: Zinc or copper-free aluminum

Insulating Throat: Thermoplastic Temp. Rating — 105° C
Flammability Rating — 94V-0

Sealing Ring: Nitrile (BUNA "N")

For Aluminum Offset Reducer, add suffix A.

For Chrome-Plated Offset Reducer, add suffix CP.



Meets NEMA sealing requirements for NEMA 3R, 4 & 13 enclosures.

CSA Certified for hazardous locations Class II Groups E.F.G. Class III.

UL File No. E-3060

CSA File No. 4484

Capoffs

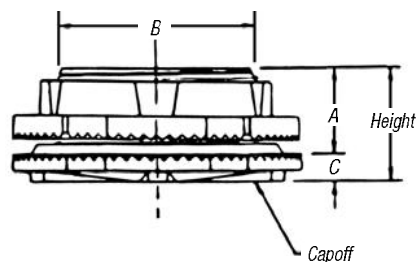

CAT. NO.	TRADE SIZE	HEIGHT	DIAMETER	(IN.)		
				A	B	C
H050CAP	½"	1⅜"	1⅞"	1⅞"	2⅜"	¾"
H075CAP	¾"	1⅝"	1⅞"	1⅞"	1⅞"	¾"
H100CAP	1"	1⅞"	2"	1⅞"	1⅞"	¾"
H125CAP	1¼"	1⅞"	2⅞"	2⅞"	1⅞"	¾"
H150CAP	1½"	1⅞"	2¾"	2⅞"	1⅞"	¾"
H200CAP	2"	1⅞"	3¼"	2⅞"	2⅞"	¾"
H250CAP	2½"	2⅞"	3¾"	1⅞"	2⅞"	¾"
H300CAP	3"	2⅞"	4⅞"	1⅞"	3⅞"	1⅞"
H350CAP	3½"	2⅞"	5"	2⅞"	4⅞"	1⅞"
H400CAP	4"	2⅞"	5½"	2⅞"	4⅞"	1⅞"
H500CAP	5"	2⅞"	6⅞"	2⅞"	5⅞"	1⅞"
H600CAP	6"	3"	7⅞"	3⅞"	6⅞"	1⅞"

Material — Capoff and Locknut: Zinc or copper-free aluminum

Insulating Throat: Thermoplastic temp. rating — 105° C
Flammability Rating — 94V-0

Sealing Ring: Nitrile (BUNA "N")

For Aluminum Capoff, add suffix A.

For Chrome-Plated Capoff, add suffix CP.

Meets NEMA sealing requirements for NEMA 3R, 4 & 13 enclosures.

CSA Certified for hazardous locations Class II Groups E.F.G. Class III.

UL File No. E-3060

CSA File No. 4484