



Blackburn®

Parallel Groove Connector
T&B Catalog Number:

UPC Number:

PAE4141-9

Status:

78378633031

Description:


Active

Aluminum Type PAE - Parallel Groove Clamp, Extruded Type for Wire
 Range Main: 4/0 ACSR-2 sol 4-6 AR Tap: 4/0 ACSR-2 sol, 4-6 AR

Features

For use on aluminum to aluminum or aluminum to copper connections with oxide inhibitor. Can be installed with live line tools.

Standard PAE clamp is supplied with Contax (-9) and galvanized steel hardware.

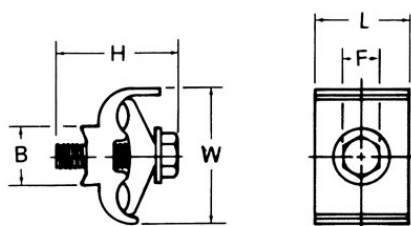

General

Style	Type PAE - Parallel Groove Clamp, Extruded Type
Material	Aluminum
Conductor Range ACSR Main	4/0 ACSR-2 sol 4-6 AR
Conductor Range ACSR Tap	4/0 ACSR-2 sol, 4-6 AR
Galvanized Steel Bolt Thd. Size	3/8-16 UNC
Aluminum Bolt Thd. Size	3/8-16 UNC

Dimension Information

B (inches)	7/8
F (inches)	9/16
H (inches)	2
L (inches)	1 3/8
W (inches)	2
Conductor Diameter Main Max.	0.563
Conductor Diameter Main Min.	0.258
Conductor Diameter Tap Max.	0.563
Conductor Diameter Tap Min.	0.258

Packaging

T&B Inner Pack	25
Package in Units	100
T&B Sold in UOM	Each
T&B Weight Per UOM	25.8 lbs. per 100

Notes

Tin plating (-P) or wax dip (-6) must be specified for without oxide inhibitor-filled connectors.

Options: 7 Aluminum hardware, P Tin plating, 6 Wax dip for oxide protection.

RUS listed.

Certifications

RoHS Compliance	Yes
-----------------	-----

For further technical assistance, please contact us...

Thomas & Betts - USA
 8155 T&B Blvd.

T&B Technical Support
 MS 3B-50

Hours: 7AM - 6PM CDT
 Monday-Friday

Memphis, TN 38125
www.tnb.com

8155 T&B Blvd.
Memphis, TN 38125

Phone: (888) 862-3289
Fax: (901) 252-1321
Email: techsupport@tnb.com