



Made in the USA Since 1946

SPEC-flexTM connectors

*Installs On FMC with a
Few Easy Turns
No Tools Required*

**Industrial Specification Grade
Connector Fittings for
Flexible Metal Conduit**




Saves Labor on Every Connection
No Screw or Crimp Required to Install
No Screws to Pinch or Pierce Conduit
NOT a Thin Wall Die Cast Fitting
Maintains Full Integrity of Conduit ID & OD
Count-On a Safe Burr-less Wire Pull
Allows More Room Inside Conduit For Wire
Exceeds UL Pullout Requirements by 300 %
Fully-Machined Solid Steel or Aluminum



Industrial Grade
Locknut Furnished

Adapters Available to Connect
FMC to Rigid Pipe or EMT

Made in the USA
Full USA Material Certs for
ARRA and Buy American Act

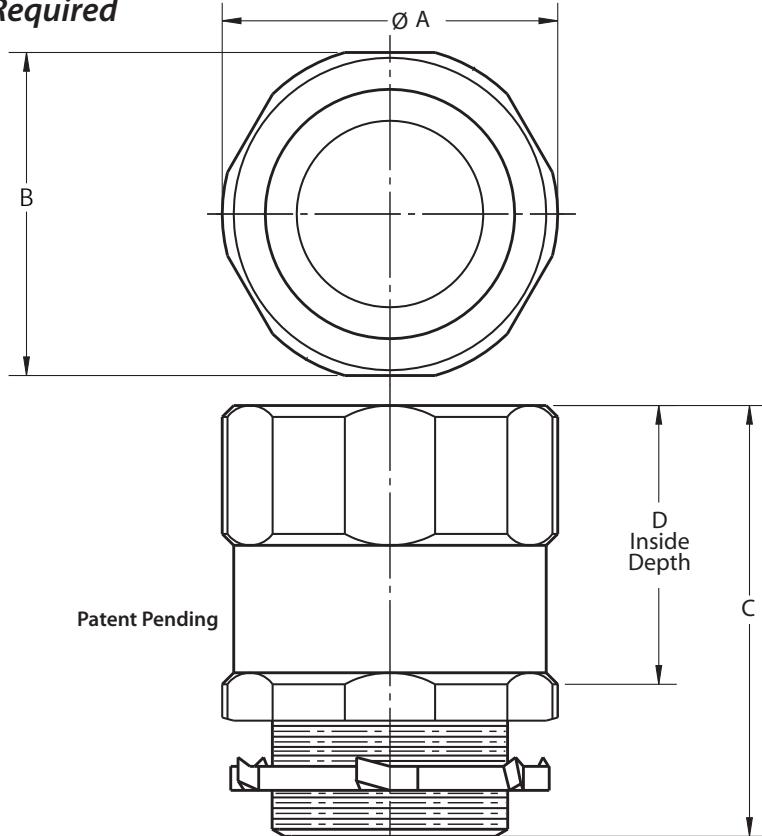

Furnished with N.P.S Threads
and Industrial Grade Locknut



Fitting Without Insulated Throat

Cat #	Trade Size	Material	A	B	C	D
FLX50	1/2"	Steel *	1 5/32"	1 1/8"	1 9/16"	1"
FLX50AL	1/2"	Aluminum	1 5/32"	1 1/8"	1 9/16"	1"
FLX75	3/4"	Steel *	1 7/16"	1 3/8"	1 9/16"	1"
FLX75AL	3/4"	Aluminum	1 7/16"	1 3/8"	1 9/16"	1"
FLX100	1"	Steel *	1 11/16"	1 5/8"	1 5/8"	1"
FLX100AL	1"	Aluminum	1 11/16"	1 5/8"	1 5/8"	1"

Fitting With Insulated Throat - B added to Cat #

Cat #	Trade Size	Material	A	B	C	D
FLX50B	1/2"	Steel *	1 5/32"	1 1/8"	1 9/16"	1"
FLX50BAL	1/2"	Aluminum	1 5/32"	1 1/8"	1 9/16"	1"
FLX75B	3/4"	Steel *	1 7/16"	1 3/8"	1 9/16"	1"
FLX75BAL	3/4"	Aluminum	1 7/16"	1 3/8"	1 9/16"	1"
FLX100B	1"	Steel *	1 11/16"	1 5/8"	1 5/8"	1"
FLX100BAL	1"	Aluminum	1 11/16"	1 5/8"	1 5/8"	1"

Consult Factory for Sizes Not Shown

* Steel is Zinc Plated for Full Corrosion Resistance