

Adapter EMT Steel Comp. to FMC (flex)

Size Range: 1/2" - 4"


Product Series: FLXEMT EMT Compression* to Greenfield (FMC)

Material: Solid Alloy Steel Construction

Zinc Plated with Chromate Finish


Made in the USA

Industrial SPEC-grade

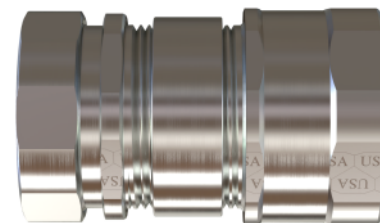

SPECflex
Connector System

Exceeds UL Pullout Requirements by 300%
Unlike Diecast Product Cannot Crack or Deform


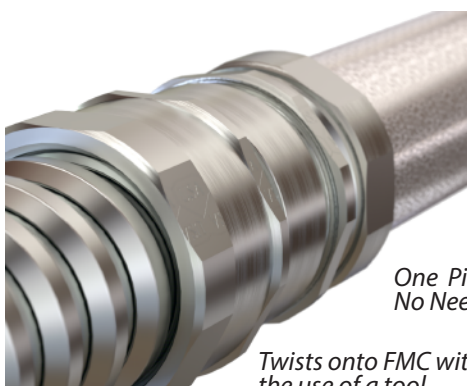


*One Piece Construction
No Need to Take Adapter Apart to Install*

*Twists onto FMC without
the use of a tool.*

Converts EMT Conduit to FMC flex Conduit
Compression Configuration

Precision Machined from Solid Alloy Bar Stock
Machined Cut Threads
Full Compression EZ Torque Nuts

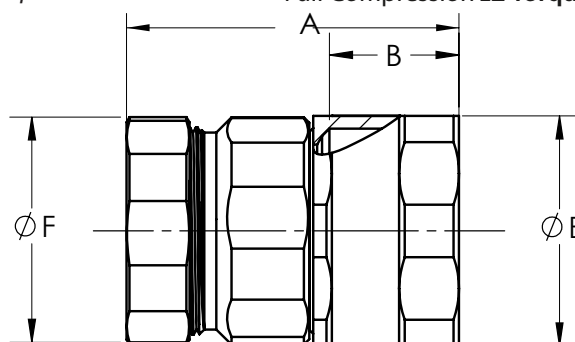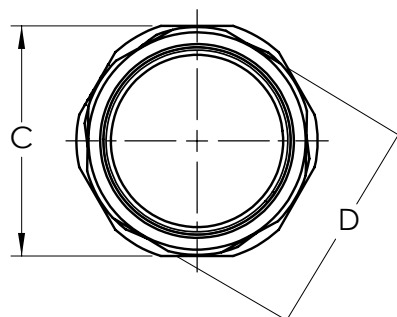

Cat #	TRADE SIZE	A LENGTH	B DEPTH	C HEX	D HEX	E DIAMETER	F DIAMETER
FLXEMT50	1/2"	1-15/16"	11/16"	1-1/16"	15/16"	1-1/8"	1"
FLXEMT75	3/4"	1-15/16"	11/16"	1-1/4"	1-3/16"	1-3/8"	1-1/4"
FLXEMT100	1"	2-1/4"	15/16"	1-1/2"	1-7/16"	1-5/8"	1-1/2"
FLXEMT125	1-1/4"	2-7/16"	1-1/16"	1-13/16"	1-13/16"	1-15/16"	1-7/8"
FLXEMT150	1-1/2"	2-13/16"	1-3/16"	2-1/16"	2-1/16"	2-3/16"	2-3/16"
FLXEMT200	2"	2-13/16"	1-3/16"	2-9/16"	2-9/16"	2-11/16"	2-7/8"
FLXERC250	2-1/2"	3-1/2"	1-5/16"	3-5/16"	3-7/16"	3-7/16"	3-7/16"
FLXERC300	3"	3-9/16"	1-1/4"	3-15/16"	3-7/8"	4"	4"
FLXERC350	3-1/2"	3-5/8"	1-5/16"	4-7/16"	4-7/16"	4-9/16"	4-9/16"
FLXERC400	4"	3-5/8"	1-5/16"	4-15/16"	4-15/16"	5-1/8"	5-1/8"

Compliances:

Certified Made in the USA

UL 514B

NEMA Standard FB1

Federal Standard A-A-50553

UL Standards: 514B, 467

CSA Standard: C22.2 No. 18F

RoHS Compliant

REACH Compliant

CA Prop 65 Compliant

UNSPSC 39131707



Available OPTIONS:

* EMT Set Screw Fitting to Flex

Rigid Conduit Adapters to Flex

Liquid Tight Conduit Adapters to Flex

SPECflex Single Turn On Flex Connector

Note:

SPECflex connectors are designed to work and interface with UL listed, Made in USA FMC / Greenfield conduit. We cannot guarantee fit, form, or function with non-UL off-shore conduit.

Request a sample from factory to ensure capatibility.