

Adapter EMT Steel SS to FMC (flex)

Size Range: 1/2" - 4"

EMT Set Screw* to Flex Adapter


Product Series: FLXSS EMT Set Screw to Greenfield (FMC)

Material: Solid Alloy Steel Construction


Zinc Plated with Chromate Finish

Made in the USA

Industrial SPEC-grade

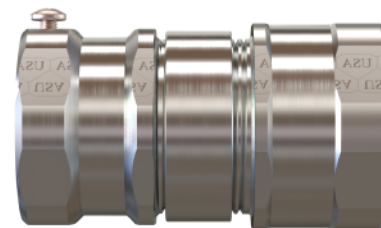

SPECflex
Connector System

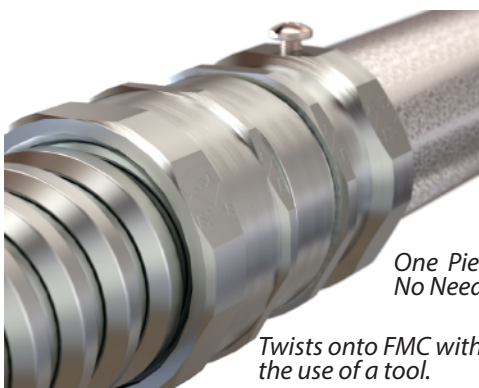

Exceeds UL Pullout Requirements by 300%
Unlike Diecast Product Cannot Crack or Deform


EMT Side:
1/2" to 2" Furnished with 1 Screw
2-1/2" to 4" Furnished with 2 Screws

One Piece Construction
No Need to Take Adapter Apart to Install

Twists onto FMC without the use of a tool.

Converts EMT Conduit to FMC flex Conduit
Set Screw Configuration

Precision Machined from Solid Alloy Bar Stock
Machined Cut Threads
Full Compression EZ Torque Nuts

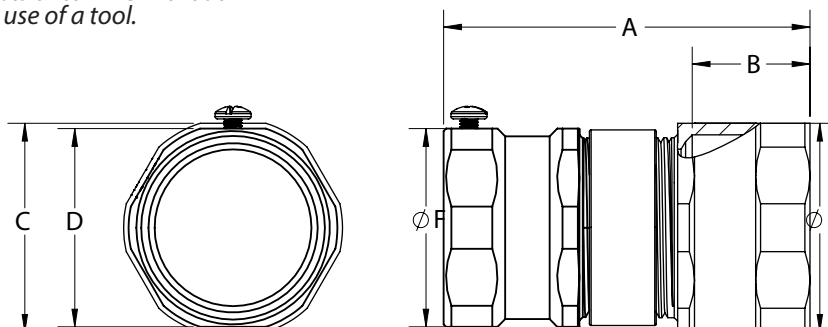

Cat #	TRADE SIZE	A LENGTH	B DEPTH	C HEX	D HEX	E E DIAMETER	F F DIAMETER
FLXSS50	1/2"	2-5/8"	11/16"	1-1/16"	7/8"	1-1/8"	7/8"
FLXSS75	3/4"	3"	11/16"	1-1/4"	1-1/16"	1-3/8"	1-1/8"
FLXSS100	1"	3-13/16"	15/16"	1-1/2"	1-3/8"	1-5/8"	1-3/8"
FLXSS125	1-1/4"	3-9/16"	1-1/16"	1-13/16"	1-3/4"	1-15/16"	1-3/4"
FLXSS150	1-1/2"	4-1/8"	1-3/16"	2-1/16"	2-1/16"	2-3/16"	2-1/16"
FLXSS200	2"	5-1/8"	1-3/16"	2-9/16"	2-1/2"	2-11/16"	2-1/2"
FLXERS250	2-1/2"	5-1/8"	1-5/16"	3-5/16"	3-1/4"	3-7/16"	3-7/16"
FLXERS00	3"	5-1/4"	1-1/4"	3-15/16"	3-15/16"	4"	4"
FLXERS350	3-1/2"	5-1/4"	1-5/16"	4-7/16"	4-7/16"	4-9/16"	4-9/16"
FLXERS400	4"	5-1/4"	1-5/16"	4-15/16"	4-15/16"	5-1/8"	5-1/8"

Compliances:

Certified Made in the USA

UL 514B

NEMA Standard FB1

Federal Standard A-A-50553

UL Standards: 514B, 467

CSA Standard: C22.2 No. 18F

RoHS Compliant

REACH Compliant

CA Prop 65 Compliant

UNSPSC 39131707



Available OPTIONS:

* EMT Compression Fitting to Flex

Rigid Conduit Adapters to Flex

Liquid Tight Conduit Adapters to Flex

SPECflex Single Turn On Flex Connector

Note:

SPECflex connectors are designed to work and interface with UL listed, Made in USA FMC / Greenfield conduit. We cannot guarantee fit, form, or function with non-UL off-shore conduit.

Request a sample from factory to ensure capatibility.