

AMERICAN FITTINGS Corporation



Rigid RT Steel Compression Connector

Size Range: 1/2" - 4" Alloy Steel

Product Series: NT Rain Tight Rigid / IMC Compression Connector

Material: Solid Alloy Steel Construction

Made in the USA

Features:

Precision Machined Cut Threads



AMFICO EZ **Torque** Solid Steel Compression Nut

Zinc Plated with a Chromate Finish **

UL Rated Concrete Tight UL Listed Rain Tight

Suitable for Direct Burial

Twice the Strength and Durability with
a Fraction of the Weight and Size of Malleable Iron

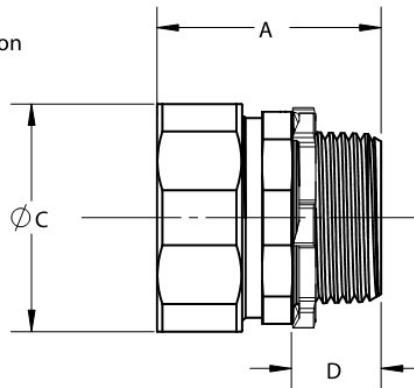

Industrial SPEC-grade

2 1/2" thru 4" Are UL Listed & Approved For Use on Both EMT & Rigid Conduit

Compression Nut Plated Gold Tone for
EZ Inspection and Identification

Compression Nut has a
Full Flat Hex Surface for Full Torque

Guaranteed Rain Tight



RT Compression Connector



Furnished with a UL Listed
Steel Locknut Sealing Washer

| Cat # | TRADE SIZE | A LENGTH | B HEX | C DIAMETER | D THREAD LENGTH | Wt. Per/C |
|------------------|---------------|-------------|----------|---------------|-----------------------|--------------|
| NT2750RT | 1/2" | 1-1/2" | 1-1/8" | 1-3/16" | 1/2" | 13 |
| NT2751RT | 3/4" | 1-5/8" | 1-3/8" | 1-7/16" | 1/2" | 20 |
| NT2752RT | 1" | 1-15/16" | 1-11/16" | 1-3/4" | 11/16" | 36 |
| NT2753RT | 1-1/4" | 2-1/8" | 2-1/16" | 2-3/16" | 11/16" | 48 |
| NT2754RT | 1-1/2" | 2-3/8" | 2-5/16" | 2-3/8" | 3/4" | 70 |
| NT2755RT | 2" | 2-1/2" | 2-13/16" | 2-7/8" | 3/4" | 100 |
| ERC250CONNRT (1) | 2-1/2" | 3-7/16" | 3-1/4" | 3-7/16" | 1" | 120 |
| ERC300CONNRT (1) | 3" | 4" | 3-15/16" | 4" | 1" | 165 |
| ERC350CONNRT (1) | 3-1/2" | 4-9/16" | 4-7/16" | 4-9/16" | 1" | 201 |
| ERC400CONNRT (1) | 4" | 5-1/8" | 4-15/16" | 5-1/8" | 1" | 237 |

(1) 2 1/2" to 4" UL Listed and Rated for both EMT & Rigid Conduit. Product is stamped accordingly.

Compliances:

Certified Made in the USA

UL 514B, 467 UL Listed Rain Tight

Compression Fittings Concrete Tight

Suitable for Direct Burial

NEMA Standard FB1

Federal Standard A-A-50553

Certified for MIL-STD 810 Sinusoidal Vibrations

CSA Standard: C22.2 No. 18F

RoHS Compliant

REACH Compliant

CA Prop 65 Compliant

UNSPSC 39121311



Available OPTIONS:

Factory Installed 105° UL Rating Insulated Bushing-
For this Option, Add Suffix B to Above Cat Number

** Galvanized Plating - Option

For this Option, Add Suffix "G" to Above Cat Number

Color Coded Painted (powder coated) Fittings- See Catalog Page

Rain Tight Series Recommended for Direct Burial Requirements

AMFTGS.com

t: 800-221-5268

e: info@amftgs.com

© Copyright 2021 AMERICAN FITTINGS Corporation Fair Lawn, NJ

Specifications Subject to Change Without Notice