




Threaded GRC/ IMC to
Unthreaded
GRC/IMC/ EMT



Threaded GRC / IMC to
Threaded GRC / IMC

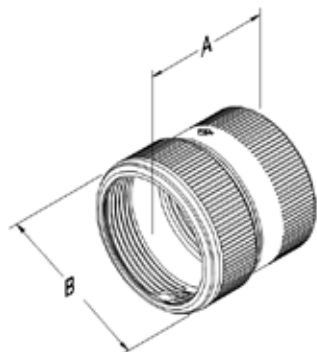

Universal Super Fitting™ 3 Piece Coupling Raintight

Applications

- Used to join two lengths of conduit; couples conduit when conduit cannot be turned
- Suitable for outdoor applications
- Threaded GRC/IMC to Threaded GRC/IMC
- Threaded GRC/IMC to Unthreaded GRC/IMC
- Threaded GRC/IMC to Thin Wall EMT
- Threaded GRC/IMC to PVC

Features

- UL Listed for Wet Location
- Ease of installation/Quick-connect
- Universal connecting - Threaded to Threaded, Threaded to Unthreaded
- No more turning Pipe
- Self Pipe Alignment
- Eliminates field threading
- Fit GRC/IMC/EMT (Fits all UL approved metal conduit)

Standard Materials

- Steel
- Nylon
- Neoprene

Standard Finish

- Zinc Plated

Applicable Third Party Standards

- UL us listed UL 514B; C22.2 No. 18.3-12
- UL Listed File # E207875

U.S. Patent No. 8.586.881

Catalog Number	Replaces Part Number	Trade Size (in)	Dim A (in)	Dim B (in)	Inner Pack	Master Pack	Weight Per C (lb)
SECR50KON*	EC50KON	½	2.110	1.25	25	100	24.5
SECR75KON*	EC75KON	¾	2.089	1.45	25	100	28.5
SECR100KON*	EC100KON	1	2.461	1.71	10	50	43.2
SECR125KON*	EC125KON	1¼	2.609	2.07	5	25	58.6
SECR150KON*	EC150KON	1½	2.647	2.32	5	25	67.0
SECR200KON*	EC200KON	2	2.705	2.80	2	10	84.0
SECR250KON**	EC250KON	2½	3.904	3.45	2	-	175.0
SECR300KON**	EC300KON	3	4.024	4.08	1	-	211.0
SECR350KON**	EC350KON	3½	4.334	4.59	1	-	271.5
SECR400KON**	EC400KON	4	4.444	5.24	1	-	371.5
SECR500KON^	EC500KON	5	5.630	6.25	1	-	540.0

** Use with Rigid, and IMC

** Use with Rigid, IMC, and EMT

^UL approved for threaded to threaded only