

EMT Steel Set Screw Coupling

Size Range: 1/2" - 4" 2 1/2" thru 4" are UL Listed & Approved for Use on Both EMT & Rigid

Product Series: SS - EMT Set Screw Coupling

Material: Solid Alloy Steel Construction

Zinc Plated with a Chromate Finish

Made in the USA

Features:

Precision Machined Steel Body and Threaded Screw Holes


Fully Avoids Cracking or Distortion from Tightening Set Screws

AMFICO EZ Torque Tri-Head Steel Screws Will Not Crack, Vibration Resistant

May be Installed Using Slotted, Phillips or Robertson Driver

UL Rated Concrete Tight When Taped

Twice the Strength and Durability of ALL Die Cast and Malleable Products

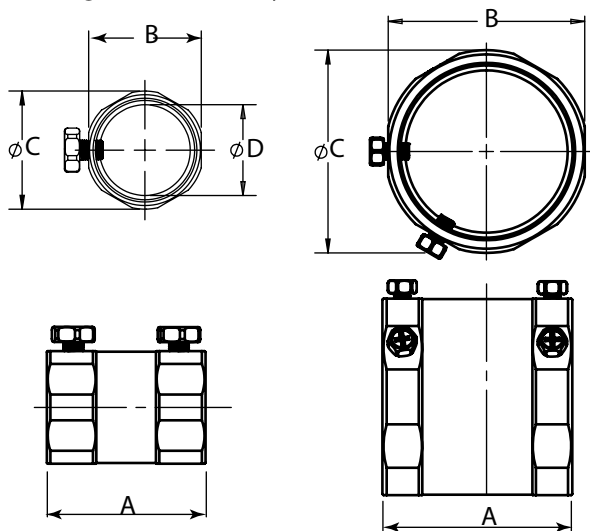

1/2" thru 2" have one set screw per end
2 1/2" thru 4" have two set screws per end
Recommended Torque 160-200 in-lb

Industrial SPEC-grade



Set Screw Coupling



Cat #	TRADE SIZE	A LENGTH	B HEX	C DIAMETER	D DIAMETER	Wt. Per/C
SS60US	1/2"	1-1/2"	7/8"	7/8"	11/16"	8
SS61US	3/4"	1-1/2"	1-1/16"	1-1/8"	7/8"	10
SS62US	1"	1-7/8"	1-3/8"	1-3/8"	1-1/8"	20
SS63US	1-1/4"	2-3/16"	1-11/16"	1-3/4"	1-1/2"	29
SS64US	1-1/2"	2-5/8"	1-15/16"	2-1/16"	1-11/16"	42
SS65US	2"	2-11/16"	2-7/16"	2-1/2"	2-1/8"	54
ERS250CPLG (1)	2-1/2"	2-9/16"	3-1/4"	3-7/16"	2-13/16"	108
ERS300CPLG (1)	3"	2-5/8"	3-15/16"	4"	3-7/16"	129
ERS350CPLG (1)	3-1/2"	2-5/8"	4-7/16"	4-9/16"	3-15/16"	154
ERS400CPLG (1)	4"	2-5/8"	4-15/16"	5-1/8"	4-7/16"	172

(1) 2 1/2" to 4" are UL Listed & Approved for use on BOTH EMT & Rigid Conduit. Product is stamped accordingly.

Compliances:

Certified Made in the USA

UL 514B, 467

Set Screw Fittings Concrete Tight When Taped

NEMA Standard FB1

Federal Standard A-A-50553

Certified for MIL-STD 810 Sinusoidal Vibrations

CSA Standard: C22.2 No. 18F

RoHS Compliant

REACH Compliant

CA Prop 65 Compliant

UNSPSC 39121434



Available OPTIONS:

Color Coded Painted (powder coated) Fittings - See Catalog Page