

## Cable to Ground Rod

### Mold Information:

- Molds listed are for stranded cable. For solid conductor, add suffix "S" after conductor number. i.e. 4S = 4 AWG solid conductor.
- Price Key is the **Bold Letter** in the Mold Part No.
- For mold Wear Plates, add suffix "WP" to the end of the Mold Part No. See page 270 for details.

### Required Tools & Accessories:


- MH1 - Handle for "P" Price Key Molds
- MH2 - Handle for "Y" Price Key Molds
- MH3 - Handle for "R" Price Key Molds

### Recommended Tools & Accessories:

- CCBRSH1 - Cable Cleaning Brush
- MCBRSH1 - Mold Cleaning Brush

### UL 467 Listing:

- #6 thru 250 MCM

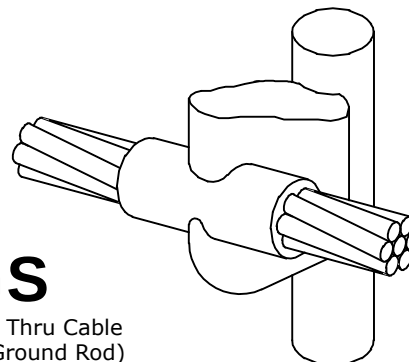

## GS

(Horizontal Thru Cable to Side of Ground Rod)

cUL US Listed 467

**Cost Effective  
2-Piece Design**

### GS Connection Type

| Ground Rod Size | Cable Size | Mold Part No. | Weld Metal |              |
|-----------------|------------|---------------|------------|--------------|
|                 |            |               | UltraShot  | NUWTUBE      |
| 1/2"            | #6         | GS-12F6R      | US65       | NUWTUBE65    |
|                 | #4         | GS-12F4R      | US65       | NUWTUBE65    |
|                 | #2 Sol     | GS-12F2SR     | US65       | NUWTUBE65    |
|                 | #2         | GS-12F2R      | US65       | NUWTUBE65    |
|                 | 1/0        | GS-12F1/0P    | US115      | NUWTUBE115   |
|                 | 2/0        | GS-12F2/0P    | US115      | NUWTUBE115   |
|                 | 3/0        | GS-12F3/0P    | US150      | NUWTUBE150   |
|                 | 4/0        | GS-12F4/0P    | US150      | NUWTUBE150   |
| 5/8"            | 250 MCM    | GS-12F25CMP   | US150      | NUWTUBE150   |
|                 | #6         | GS-586R       | US65       | NUWTUBE65    |
|                 | #4         | GS-584R       | US65       | NUWTUBE65    |
|                 | #2 Sol     | GS-582SR      | US65       | NUWTUBE65    |
|                 | #2         | GS-582R       | US65       | NUWTUBE65    |
|                 | 1/0        | GS-581/0P     | US115      | NUWTUBE115   |
|                 | 2/0        | GS-582/0P     | US115      | NUWTUBE115   |
|                 | 3/0        | GS-583/0P     | US150      | NUWTUBE150   |
| 500 MCM         | 4/0        | GS-584/0P     | US150      | NUWTUBE150   |
|                 | 250 MCM    | GS-5825CMP    | US150      | NUWTUBE150   |
|                 | 500 MCM    | GS-585CMY     | US400      | 2-NUWTUBE200 |

### GS Connection Type continued

| Ground Rod Size | Cable Size | Mold Part No. | Weld Metal |              |
|-----------------|------------|---------------|------------|--------------|
|                 |            |               | UltraShot  | NUWTUBE      |
| 3/4"            | #6         | GS-346R       | US65       | NUWTUBE65    |
|                 | #4         | GS-344R       | US65       | NUWTUBE65    |
|                 | #2 Sol     | GS-342SR      | US65       | NUWTUBE65    |
|                 | #2         | GS-342R       | US65       | NUWTUBE65    |
|                 | 1/0        | GS-341/0P     | US115      | NUWTUBE115   |
|                 | 2/0        | GS-342/0P     | US115      | NUWTUBE115   |
|                 | 3/0        | GS-343/0P     | US150      | NUWTUBE150   |
|                 | 4/0        | GS-344/0P     | US150      | NUWTUBE150   |
|                 | 250 MCM    | GS-3425CMP    | US200      | NUWTUBE200   |
|                 | 500 MCM    | GS-345CMY     | US500      | 2-NUWTUBE250 |

### NOTES:

- Molds shown are for copper-clad steel ground rods.
- 1/2" molds are for full size ground rods.
- For welding to stainless steel, galvanized steel or solid copper ground rods, add letter "F" to ground rod size. For sectional ground rods, add letter "S" to ground rod size. See chart on page 330 for details.