



## HBS-Base Series

The HBS-Base Series is UV resistant and suitable for installation on most types of roofing material or other flat surfaces. Can be used as a curb (sleeper) replacement. Screw fasteners can be used to attach one or two hole pipe straps or a piece of strut (not included).

Specifications – H-Block Support  
Material - 100% recycled rubber,  
UV resistant



Base Area  
Shown = 33.1 Sq. In.  
For use in bearing calculations

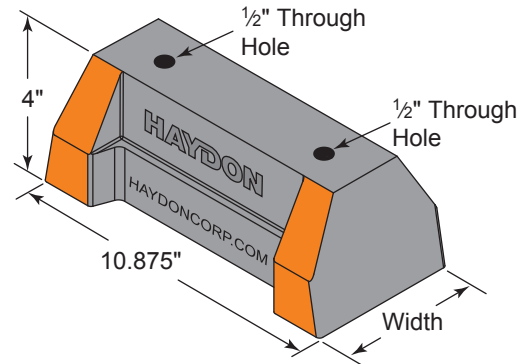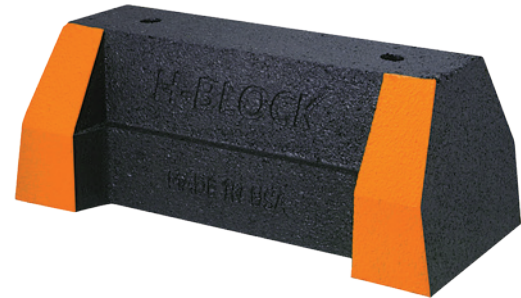

### HBS-BASE SERIES

Model No.	Height	Width	Base Length	Weight (Lbs)	Uniform Load Capacity (Lbs) *
HBS-Standard-Base Only	4" (101mm)	5" (127mm)	10 <sup>-7/8</sup> " (276mm)	4.80 lbs.	2,500 *

\* This load is only for the capacity of the components in this assembly. Please consult roofing manufacturer or engineer for roof load capacity

## SPECIFICATIONS

### MATERIAL

- H-BLOCK is 100% Recycled Rubber
- All 4 corners coated with ANSI #2535.1-1998 orange

### TESTING

Rooftop Supports Have Been Tested By An Accredited Independent Laboratory To The Following:  
ASTM D575 Method B – Modified – Compression/Deflection  
ASTM D1171 Modified – Ozone Resistance  
Freeze/Thaw Environmental Simulation

Project Information		
Project:		Notes:
Address:		
Contractor:		
Engineer:	Date:	
Approval		
<input type="checkbox"/> Approved	Signature:	Remarks:
<input type="checkbox"/> Approved as Noted		
<input type="checkbox"/> Not Approved		