

MHS SERIES



The MHS Series is a compact HID luminaire engineered for outdoor floodlighting (available up to 400 watt) that will blend easily into its surroundings. This fixture is ideal for signage, landscaping, flag poles, and general area floodlighting.



Fixture Specifications

FEATURES


- Die cast aluminum housing
- Cast door frame
- Luminaire finished in dark bronze weatherproof powder-coat paint (consult factory for optional finishes)
- Tool-free entry with twin spring steel latches
- UL listed for wet locations
- Ships complete with lamp

ORDERING INFORMATION

Catalog # Yoke	Catalog # Slipfitter	Watts/Lamp
PULSE START		
MHS-Y400P-468-1	MHS-S400P-468-1	400 PS ED37
MHS-Y320P-468-1	MHS-S320P-468-1	320 PS ED28
MHS-Y250P-468-1	MHS-S250P-468-1	250 PS ED28
HIGH PRESSURE SODIUM		
MHS-Y400S-468-1	MHS-S400S-468-1	400 HPS E18
MHS-Y250S-468-1	MHS-S250S-468-1	250 HPS E18
MHS-Y150S-468-1	MHS-S150S-468-1	150 HPS ED28
MHS-Y100S-468-1	MHS-S100S-468-1	100 HPS ED28

NOTES: • All units are Quad Tap™ (120, 208, 240, 277 volt).
• Weight reference: Y400H 26 lbs., 11.8 KG; K400H 31 lbs, 13.9 KG.
• EPA 1.4 sq. ft.

DIMENSIONS

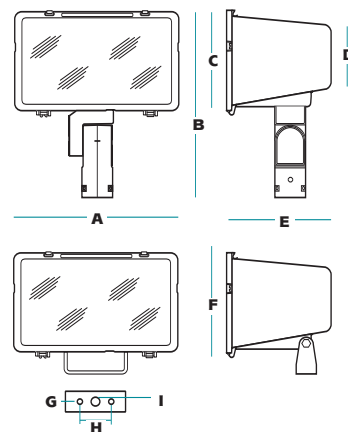

A	B	C	D	E
16.375"	18.5"	9.875"	6.125"	10.375"
F	G	H	I	
12.0"	0.5" dia.	3.125"	0.875" dia.	



A HUBBELL LIGHTING, INC. COMPANY

Performance Designed Lighting Products

www.securitylighting.com

1085 Johnson Drive • Buffalo Grove, IL 60089 • TOLL-FREE: 800-544-4848 • PHONE: 847-279-0627 • FAX: 847-279-0642

OPTIONS

(factory installed)

Catalog Number	Description
-PCR(X)¹	Photocontrol receptacle (order PTL Twist-Lock control separately)
-F(X)¹	Fusing: single 120, 277, 347 volt; double 208, 220, 240, 480 volt
-OSST	Time Delay Restrike Quartz (less lamp)
-EM	Emergency Socket - DC bayonet base (knuckle units only)

¹ Specify wire voltage when ordering, replace **X** with **1** - 120V, **2** - 208V, **3** - 240V, **4** - 277V, **5** - 480V.

ACCESSORIES

(order as separate part #, field installed)

Catalog Number	Description
PBT-1	Button Photocontrol, 120 volt
PBT-234	Button Photocontrol, 208, 240, 277 volt
MHS4-SPC	Polycarbonate Shield
MHS4-G	Wire Guard
4024C	Slipfitter (yoke), steel, 2 ³ / ₈ " O.D. slipfit (bronze finish)
MHS4-GS	Glare Shield (black finish)
MHS4-VGS	Vertical Glare Shield (black finish)
MHS4-HGS	Horizontal Glare Shield (black finish)
MHS21	Two Light Bracket, bolt-on yoke mount, slipfit 2 ³ / ₈ " O.D. tenons (bronze finish)
TT-2A	Two Light Bracket, slipfitter mount units, slipfit 2 ³ / ₈ " O.D. tenons;

specify finish



MHS4-G



4024C




MHS4-GS




MHS4-VGS



MHS4-HGS



MHS21



TT-2A



A HUBBELL LIGHTING, INC. COMPANY

Performance Designed Lighting Products

www.securitylighting.com

1085 Johnson Drive • Buffalo Grove, IL 60089 • TOLL-FREE: 800-544-4848 • PHONE: 847-279-0627 • FAX: 847-279-0642