
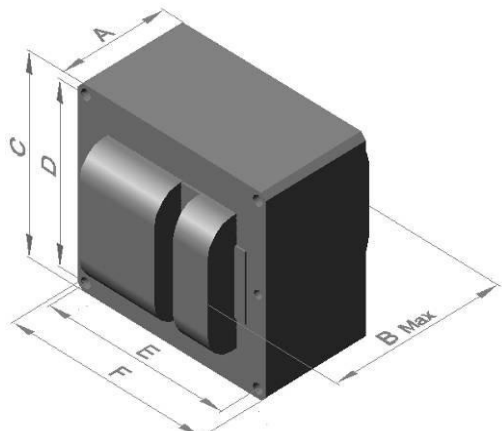




PRODUCT SPECIFICATION BULLETIN

M57 MH175W
75724-M175MULTI5KIT
Class 200°C (N) 60Hz HX-HPF
Metal Halide Lamp

Input Volts	(Volts)	120	208	240	277	480	3x4 CORE, CWA		
Line Current (Amps)									
Nominal Operating		1.880	1.100	0.950	0.800	0.480			
Max. Open Circuit		2.070	1.210	1.050	0.880	0.530			
Regulation									
Line Volts		±10%					mm		
Lamp Watts		±8%							
UL Temperature Ratings									
Insulating Class		N							
Coil Temperature Code		A	A	A	A	A	A B C D E F		
Nominal Input Watts (W)		215							
Nominal Open Circuit Voltage (Volts)		300							
Power Factor		90%							
Current Crest Factor		1.65					Capacitor Model: HQCS-12		
Input Voltage At Lamp Dropout (Volts)		78	135	156	180	312			
Min. Ambient Starting Temp.		-30°C							
60Hz TEST PROCEDURES									
High Potential Test (Volts)							Temp Rating-40°C~105°C		
1 Minute		2000							
1 Second		2500							
Open Circuit Voltage Test (Volts)									
	Min.	270					Height90 mm		
	Max.	345							
Short Circuit Current Test (Amps)									
Secondary Current	Min	1.50							
	Max	2.25							
Recommended Fuse (Amps)		6	3	3	2	1			
Weight (kG)		3.60							
Lead Lengths (mm)		250~350							
CAPACITOR Specifications									
Microfarads (µF)		12							
Volts (Min.) (Volts)		540							
