


Screw Pin Anchor Shackles

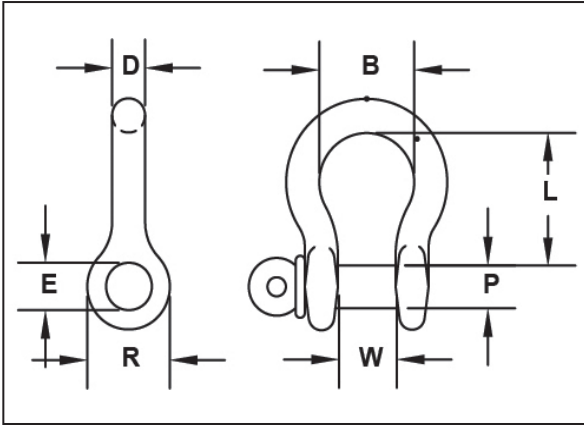

Shackle Size D (in.)	¹Rated Capacity* (tons)		Dimensions (inches)						Weight Each (lbs.)
	DOM	IMP	P	E	W	R	L	B (min.)	
3/16	1/2	1/3	0.25	0.29	0.38	0.57	0.88	0.58	0.06
1/4	3/4	1/2	0.31	0.36	0.47	0.75	1.13	0.75	0.12
5/16	1	3/4	0.38	0.45	0.53	0.84	1.25	0.81	0.20
3/8	1-1/2	1	0.44	0.52	0.66	1.00	1.40	1.00	0.30
7/16	2	1-1/2	0.50	0.58	0.72	1.15	1.69	1.19	0.50
1/2	3	2	0.63	0.70	0.84	1.34	1.94	1.38	0.75
5/8	4-1/2	3-1/4	0.75	0.83	1.06	1.66	2.41	1.63	1.30
3/4	6-1/2	4-3/4	0.88	0.95	1.28	1.94	2.84	1.89	2.30
7/8	8-1/2	6-1/2	1.00	1.09	1.44	2.14	3.31	2.06	3.50
1	10	8-1/2	1.13	1.22	1.72	2.44	3.75	2.52	5.00
1-1/8	12	9-1/2	1.25	1.36	1.84	2.66	4.02	2.69	7.00
1-1/4	14	12	1.38	1.52	2.03	3.15	4.63	2.88	9.50
1-3/8	17	13-1/2	1.50	1.65	2.25	3.25	5.19	3.25	12.50
1-1/2	20	17	1.63	1.77	2.41	3.50	5.63	3.50	17.20
1-5/8	24	20	1.75	1.88	2.66	3.91	6.13	4.13	23.50
1-3/4	30	25	2.00	2.13	2.94	4.06	6.97	4.75	27.70
2	35	35	2.25	2.38	3.28	4.51	7.44	5.50	39.00

Note: Standard capacities and dimensions shown, but may vary depending on source of supply. Specify required capacity if critical.

¹ Rated Capacity also referred to as "Working Load Limit"

- Carbon shackle, alloy pin.
- Heat treated and tempered.
- Hot dip galvanized.
- Specification: RR-C-271F.
- Type 4A, Grade A, Class 2.
- Design Factor 5:1.

*** WARNING**

Do not exceed rated capacities. Sling capacity decreases as the angle from horizontal decreases. Do not use slings at angles of less than 30°. Refer to the Effect of Angle chart found in the General Information section of Lift-All's Product Catalog.