

Simplicity™ Universal Edge-Lit Series

Single and double face, surface and recessed mount edge-lit exit sign



Construction

- High grade acrylic panel
- 6 inch EXIT lettering legend, available in red or green
- Field-selectable chevrons
- Satin aluminum housing
- Optional Improved Diagnostics

Mounting

- Universal mount model
- Double face acrylic panel with mirror background, field adaptable for single face
- Pivoting panel design allows for recessed, surface, wall or ceiling mount installation
- A ratcheting mechanism allows the panel to be set in place from 0° to 180° for wall or sloped ceiling mounting
- Canopy included for surface wall, end or ceiling mount application
- Easy snap in backbox with securing trim plate allow for sheet rock ceiling installation
- Trim plate, 27 inch adjustable T-bar hangers and a junction box included for recessed application

Approvals

- UL 924 listed
- Damp location 50°F to 104°F (10°C to 40°C)
- Meets, NFPA101, (Life Safety Code) NFPA 70 NEC and OSHA illumination Standards


Warranty (subject to proper installation and maintenance)

Three-year full warranty


Detailed warranty terms located on **page 182 of the catalog or online at:**
www.lightalarms.com




Dimensions (Dimensions are approximate and subject to change):

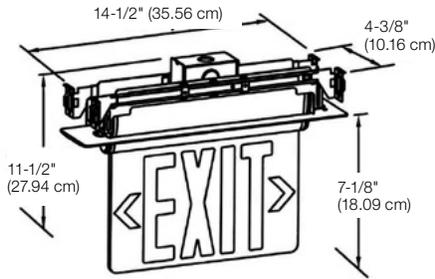


Recessed T-Bar ceiling mount

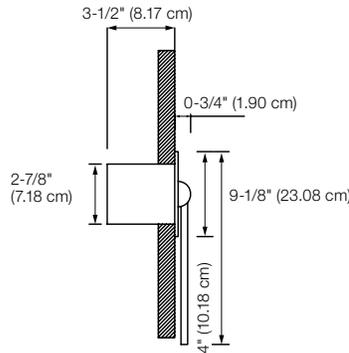


Recessed sheet rock wall mount (side view)

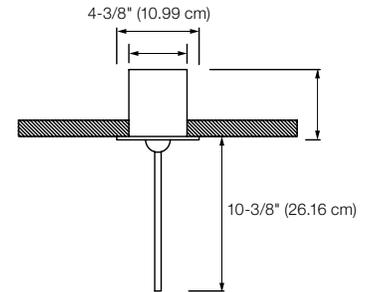


Recessed sheet rock ceiling mount (side view)



Surface wall mount



Surface end mount



Surface sloped ceiling mount

Power consumption chart

Model		AC Specs	DC Specs
Red	AC-Only	120VAC, 60Hz (2.0-2.6W)	-
		277VAC, 60Hz (2.6-3.1W)	-
	Self-powered	120VAC, 60Hz (2.0-2.6W)	Ni-Cd battery (Min. 90 Minutes)
		277VAC, 60Hz (2.6-3.1W)	Ni-Cd battery (Min. 90 Minutes)
Green	AC-Only	120VAC, 60Hz (2.8-3.3W)	-
		277VAC, 60Hz (3.5-4W)	-
	Self-powered	120VAC, 60Hz (2.8-3.3W)	Ni-Cd battery (Min. 90 Minutes)
		277VAC, 60Hz (3.5-4W)	Ni-Cd battery (Min. 90 Minutes)

Ordering format

Legend	Series	Legend color	Options
6= 6" EXIT single and double face with universal chevrons and mounting for surface or recessed	UEA= AC only UEN= Self-powered	RM= Red on mirror GM= Green on mirror	ID= Improved Diagnostics ¹

Example: 6UEARM

¹ Available on self-powered models only