


Composite Cable - 300V Plenum rated CL3P

Composite Cable
75°C, 300 Volt
Plenum rated
CL3P

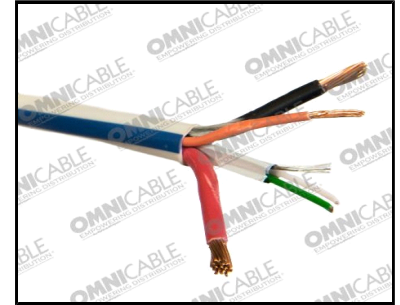

*Product images are for illustrative purposes only and may differ from the actual product.

Construction:

- 3 Parts: 12 AWG stranded BC 2C, Unshielded (POWER & COMMON) plus 18 AWG stranded BC 1C, Unshielded (SENSE LINE) plus 22 AWG stranded BC 1 Pr, Shielded (MUX DATA) Cabled and Jacketed Overall

Category Insulation Description:

- 12 AWG 2C POWER & COMMON: LS-PVC 18 AWG 1C SENSE LINE: LS-PVC 22 AWG 1 Pr MUX DATA: Fluoropolymer

Category Jacket Description:

- LS-PVC; White with royal blue stripe

Standards:

- 75°C, 300 Volt
- Plenum Rated
- UL Type CL3P
- RoHS Compliant

Category Conductor Description:

- Stranded bare copper

Shield Drain:

- (MUX DATA PAIR) Foil shield, foil in; 24 AWG stranded tinned copper drain wire

Applications:

- Wiring for lighting control system devices
- Compatible with Lutron lighting systems

Part Number Table			
Part#	Houston Wire & Cable	Outside Diameter Inches	Material Weight (Lbs./M')
LT2-46L-5	22-02+12-02CMPG	0.242	74

Note: The information in this specification sheet is approximate and subject to standard industry and manufacturer tolerances. Please verify specific requirements with your Omni Cable account manager

Selling Exclusively Through Distribution Since 1977 [™] | phone: 800-292-OMNI | website: omnicable.com

Atlanta • Boston • Charlotte • Chicago • Cincinnati • Denver • Houston • Los Angeles • Philadelphia • San Francisco • Seattle • St. Louis • Tampa • Toronto

© 2020 Omni Cable LLC