



Pass & Seymour

Straight Blade Receptacles Construction Grade Smooth Face 15 & 20A, 125V

CRB5262S, CRB5362S

Impact-resistant smooth nylon face for less dirt build-up.

Adding a smooth face to our rugged Construction Grade Receptacle means less dirt-catching crevices and less cleaning. They offer the same quality features with a corrosion-resistant plated steel strap and screw-pressure-plate back wiring for continued value and ease of installation.



Features & Benefits

.032 inch thick, brass, triple-wipe power contacts for lasting retention.

Two drive screws anchor strap to back body and face where abrupt removal torque is strongest.


Smooth nylon face for ease of cleaning and less dirt build-up.

Corrosion-resistant, plated steel strap locked into face and back body to resist pulling away from face/body assembly.

Auto-ground clip assures positive ground.

Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.

Tri-drive steel terminal screws. Internal screw-pressure-plate back and side wire capability. Two back wire holes for more wiring flexibility.

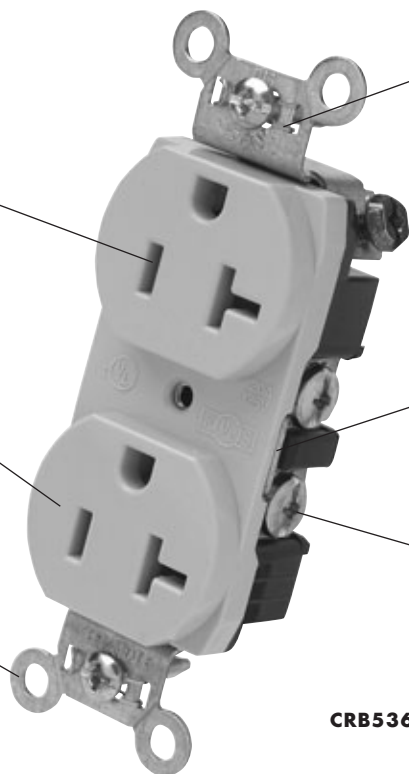

CRB5362S-I

Field Uses/Vertical Markets

- | | | | |
|-------------|-----------------------|---------------------|----------|
| ■ Education | ■ Institutional | ■ Retail | ■ Office |
| | ■ Hospitality/Lodging | ■ Multiple Dwelling | |

SF308R1 — Updated April 2005 — For latest specs visit www.legrand.us/passandseymour

Straight Blade Receptacles Construction Grade Smooth Face 15 & 20A, 125V

Ordering Information

Catalog Number	Rating A. V.	Color	NEMA Config. No.
Duplex Receptacles Back & Side Wire			
CRB5262S-I	15 125	Ivory	5-15R
CRB5262S-W	15 125	White	5-15R
CRB5262S	15 125	Brown	5-15R
CRB5262S-GRY	15 125	Gray	5-15R
CRB5262S-BK	15 125	Black	5-15R
CRB5262S-RED	15 125	Red	5-15R
CRB5262S-LA	15 125	Light Almond	5-15R
CRB5362S-I	20 125	Ivory	5-20R
CRB5362S-W	20 125	White	5-20R
CRB5362S	20 125	Brown	5-20R
CRB5362S-GRY	20 125	Gray	5-20R
CRB5362S-BK	20 125	Black	5-20R
CRB5362S-RED	20 125	Red	5-20R
CRB5362S-LA	20 125	Light Almond	5-20R



NEMA
5-15R



NEMA
5-20R

For more information on these and other P&S products refer to our Product Guide or visit our web site.

Straight Blade Receptacles Construction Grade Smooth Face 15 & 20A, 125V



Pass & Seymour

Technical Specifications

3rd Party Compliance

UL Listed, File Number E140596, Standard UL498.
Federal Specification WC596.
CSA/CUL approved, File Number LR16063, Standard CSA C22.2 No. 42.

Performance

Electrical


Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

Mechanical

Terminal Identification	Terminal Identification in accordance with UL498 (Brass, White, Green)
Terminal Accommodation	#14 AWG – #10 AWG copper conductor only
Product Identification	Ratings are a permanent part of the device

Environmental

Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

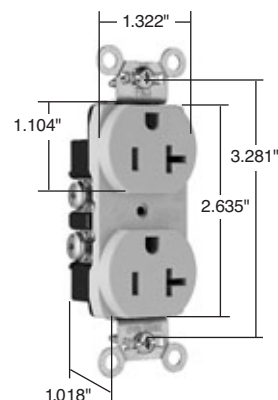

Dimensions for
15 & 20 Amp


Materials

Face	Nylon	Terminal Screws	#8 Tri-Drive Steel
Back Body	PVC		(Neutral = Nickel-Plated Steel)
Line Contacts	.032 688 Brass	Ground Screw	#8 Hex Tri-Drive Steel
Mounting Strap	.042 Zinc-Plated Steel	Assembly Drive Screw	Zinc-Plated Steel
Ground Contacts	.040 260 Brass	Auto-Ground Clip	Stainless Steel
Pressure Plate	.080 Steel	Mounting Screws	Tri-Drive Steel

Warranty


1 Year

Complimentary Devices & Accessories

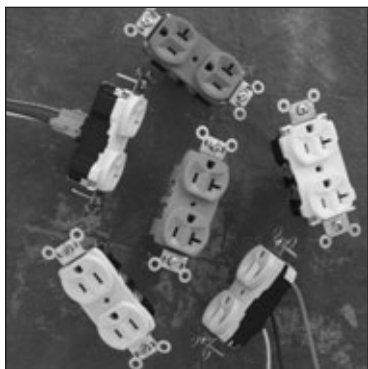

STRAIGHT BLADE RECEPTACLES

- Plug Tail™
- Extra Heavy-Duty
- Heavy-Duty
- Construction Grade Leaded
- Commercial Grade

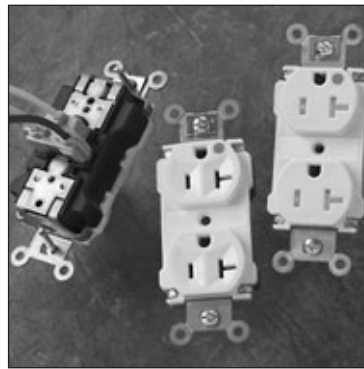


PLUGTAIL™ DEVICES

- Extra Heavy-Duty Spec Grade
- Extra Heavy-Duty Hospital Grade
- Extra Heavy-Duty Tamper-Resistant
- Extra Heavy-Duty Tamper-Resistant Hospital Grade



DECORATOR DEVICES

- Construction Grade Switches
- Specification Grade Combo Switches
- Construction Grade Receptacles
- Commercial Grade Receptacles
- Specification Grade Hallway Lights

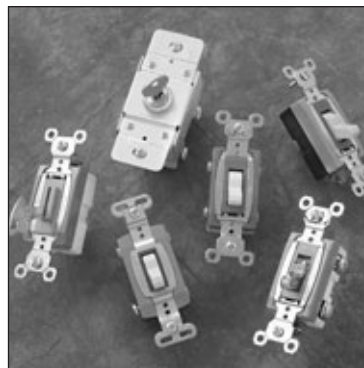

SWITCHES

- Heavy-Duty Toggle
- Heavy-Duty Lighted Toggle
- Heavy-Duty Security
- Heavy-Duty Locking
- Construction Grade Toggle
- Commercial Grade Toggle



GFCIs

- Specification Grade
- Hospital Grade
- Dead Front



WALL PLATES

- TradeMaster® Thermoplastic Nylon
- Stainless Steel
- Brass
- Aluminum
- Dustproof Stainless Steel Covers

Also available...

- Light Almond Devices
- Hospital Grade Devices
- TVSS & Isolated Ground Devices
- Ground Continuity Monitoring (GCM)
- Straight Blade Plugs & Connectors
- Turnlok® Locking Devices
- Weatherproof Boxes & Covers
- IEC 309 Industrial Products
- Flexcor® Wire Mesh Grips
- Configurable Solutions



Legrand/Pass & Seymour
P.O. Box 4822
Syracuse, NY 13221-4822
800-223-4185

North America Headquarters
60 Woodlawn Street
West Hartford, CT 06110
Phone: 1.877.BY.LEGRAND (295.3472)
Fax: 1.860.232.2062
www.legrand.us

Legrand Canada
570 Applewood Crescent
Vaughan, ON, L4K 4B4
Phone: 905.738.9195
Fax: 905.738.9721
www.legrand.ca

SF308R1 — Updated April 2005 — For latest specs visit www.legrand.us/passandseymour