


PASS & SEYMOUR® Hospital Grade Single Receptacles Tamper-Resistant 15 & 20A, 125V

TR8201, TR8301


Designed for long-term dependability.

These single receptacles feature durable, triple-wipe, single-piece, brass contacts and heavy-gauge steel straps, plated for enhanced corrosion resistance. Strap locks into the receptacle body to prevent pull-outs, and each features a ground clip for automatic ground connection to metal boxes. Screw-pressure-plate back wiring speeds installation and enables optional side wiring.

A sturdy mechanical shutter system helps prevent children from sticking objects into the receptacle. The toughest and safest tamper-resistant hospital grade receptacle available.

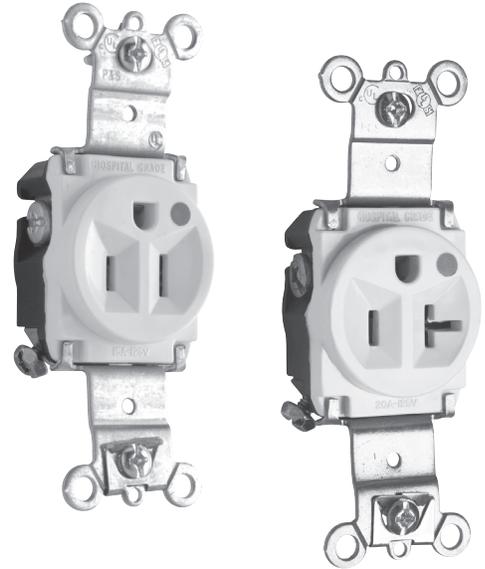

FEATURES & BENEFITS

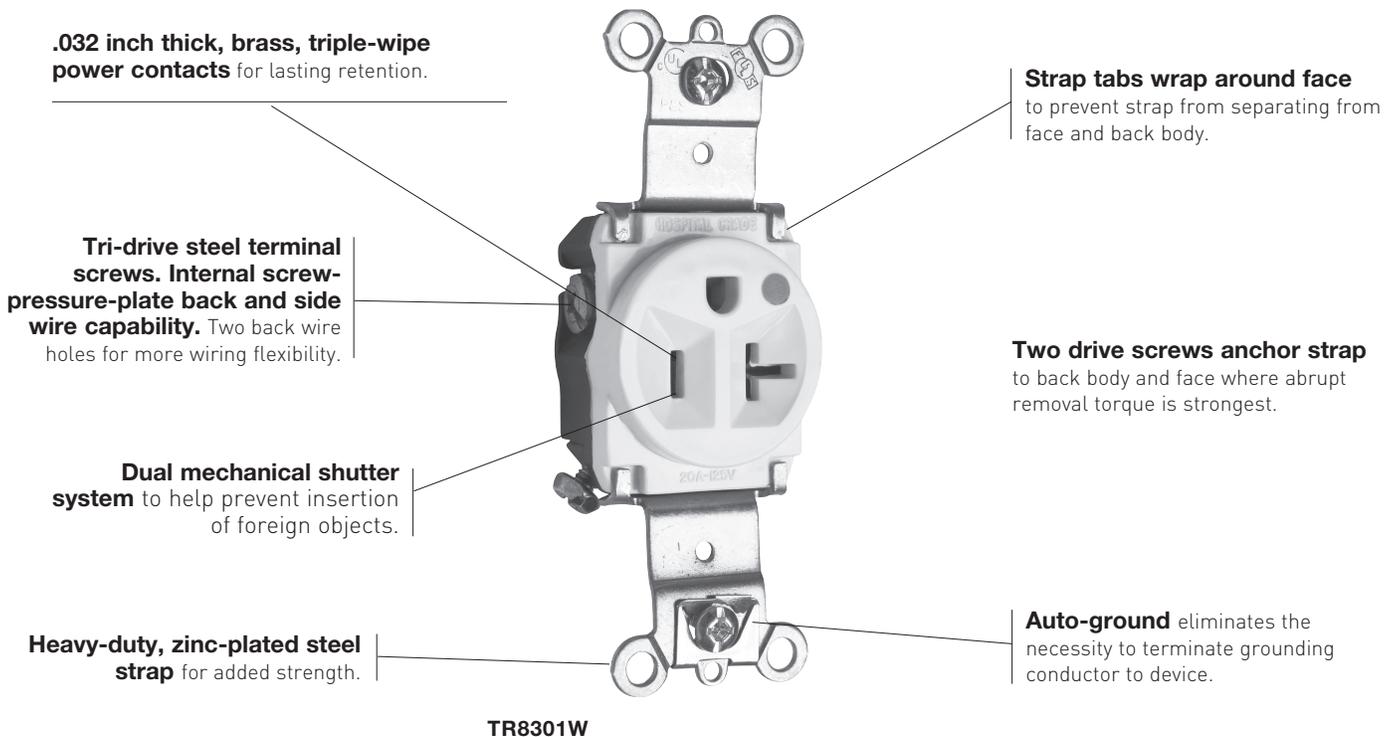

FIELD USES/VERTICAL MARKETS

■ Health Care

■ Education

■ Institutional



PASS & SEYMOUR®

Hospital Grade Single Receptacles Tamper-Resistant 15 & 20A, 125V

ORDERING INFORMATION

Catalog Number	Rating A. V.	Color	NEMA Config. No.
Hospital Grade Single Receptacles Back & Side Wire			
TR8201I	15 125	Ivory	5-15R
TR8201W	15 125	White	5-15R
TR8201	15 125	Brown	5-15R
TR8201GRY	15 125	Gray	5-15R
TR8201BK	15 125	Black	5-15R
TR8201RED	15 125	Red	5-15R
TR8301I	20 125	Ivory	5-20R
TR8301W	20 125	White	5-20R
TR8301	20 125	Brown	5-20R
TR8301GRY	20 125	Gray	5-20R
TR8301BK	20 125	Black	5-20R
TR8301RED	20 125	Red	5-20R



NEMA
5-15R



NEMA
5-20R

For more information on these and other P&S products refer to our Catalog or visit our web site.

PASS & SEYMOUR®

Hospital Grade Single Receptacles Tamper-Resistant 15 & 20A, 125V



TECHNICAL SPECIFICATIONS

3rd Party Compliance

UL Listed, File Number E140596, Standard UL498.
Federal Specification WC596, Hospital Grade.
CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42.

Performance

Electrical


Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	125V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

Mechanical

Terminal Identification	Terminal Identification in accordance with UL498 (Brass, White, Green)
Terminal Accommodation	#14 AWG – #10 AWG copper conductor only
Product Identification	Ratings are a permanent part of the device

Environmental

Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

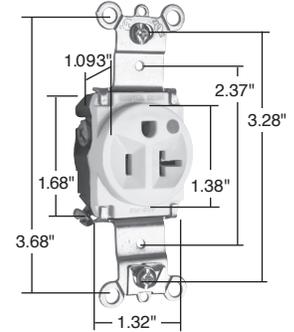

Dimensions for
15 & 20 Amp

Materials

Face	Nylon	Terminal Screws	#8 Tri-Drive Steel
Back Body	PVC	Ground Screw	#8 Hex Tri-Drive Brass
Line Contacts	.032 688 Brass	Assembly Drive Screw	Zinc-Plated Steel
Mounting Strap	.050 Zinc-Plated Steel	Auto-Ground Clip	Steel
Ground Contacts	Strap with Integral Ground	Mounting Screws	Tri-Drive Steel
Pressure Plate	.080 Steel		

Warranty

1 Year

For more information on these and other P&S products refer to our Catalog or visit our web site.

ALSO AVAILABLE...

- Hospital Grade Devices
- SPD & Isolated Ground Devices
- Ground Continuity Monitoring (GCM)
- Straight Blade Plugs & Connectors
- Turnlok® Locking Devices
- Weatherproof Boxes & Covers
- IEC 309 Industrial Products
- Flexcor® Wire Mesh Grips



Electrical Wiring Systems

P.O. Box 4822
Syracuse, NY 13221-4822
Phone: 1.800.776.4035
www.legrand.us/passandseymour

570 Applewood Crescent
Vaughan, Ontario L4K 4B4
Phone: 905.738.9195
www.legrand.ca