




Pass & Seymour

Hospital Grade Devices Heavy-Duty Decorator Receptacles 15 & 20A, 125V

26262-HG, 26362-HG, 26222-HG, 26322-HG

The durability matches the looks.

The smooth style fits in anywhere — and that beauty isn't just skin-deep. The face is impact-resistant nylon, and a heavy-gauge, plated strap locks into the receptacle assembly to fight pull-outs. One-piece, triple-wipe brass contacts also help ensure long service life. Installation's easy, thanks to auto-ground and screw-pressure-plate back wiring (with side wiring optional).

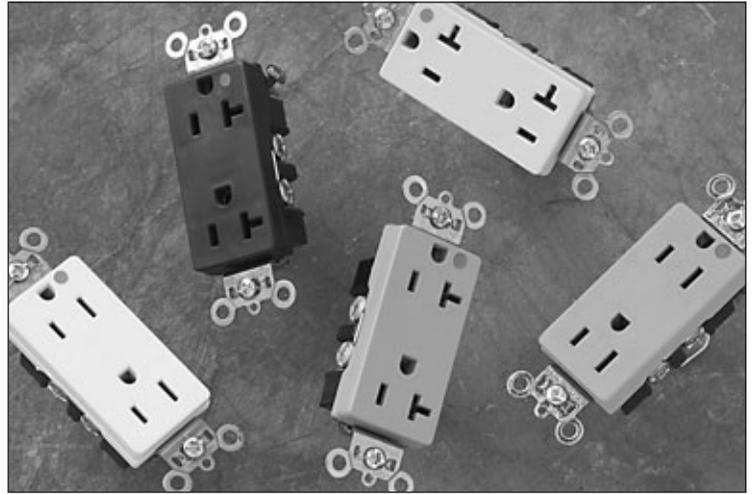


Features & Benefits

.032 inch thick, brass, triple-wipe power contacts for lasting retention.

Two drive screws anchor strap to back body and face where abrupt removal torque is strongest.

Corrosion-resistant, plated steel strap locked in to face and back body to resist pulling away from face/body assembly.

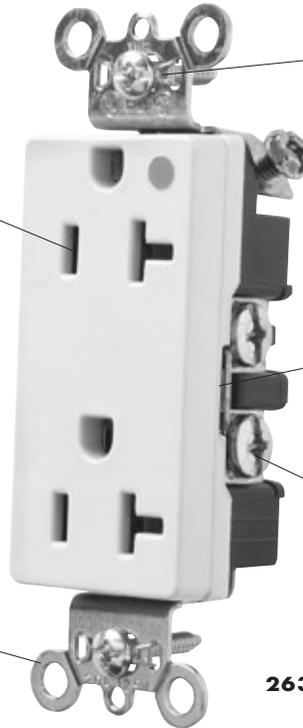

26362-HG1

Auto-ground eliminates the necessity to terminate grounding conductor to device.

Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.

Tri-drive steel terminal screws. Internal screw-pressure-plate back and side wire capability. Two back wire holes for more wiring flexibility.

Field Uses/Vertical Markets

■ Health Care

■ Education

■ Institutional



Pass & Seymour

Hospital Grade Devices Heavy-Duty Decorator Receptacles 15 & 20A, 125V

Ordering Information

Catalog Number	Rating A. V.	Color	NEMA Config. No.
Hospital Grade Duplex Receptacles Back & Side Wire			
26262-HGI	15 125	Ivory	5-15R
26262-HGW	15 125	White	5-15R
26262-HGGRY	15 125	Gray	5-15R
26262-HGRED	15 125	Red	5-15R
26362-HGI	20 125	Ivory	5-20R
26362-HGW	20 125	White	5-20R
26362-HG	20 125	Brown	5-20R
26362-HGGRY	20 125	Gray	5-20R
26362-HGRED	20 125	Red	5-20R
Hospital Grade Illuminated Face Duplex Receptacles Back & Side Wire			
26222-HGI	15 125	Ivory	5-15R
26322-HGI	20 125	Ivory	5-20R
26322-HGW	20 125	White	5-20R
26322-HGRED	20 125	Red	5-20R



NEMA
5-15R



NEMA
5-20R

For more information on these and other P&S products refer to our Product Guide or visit our web site.

SF707R1 — Updated January 2004 — For latest specs visit www.legrand.us/passandseymour

Hospital Grade Devices Heavy-Duty Decorator Receptacles 15 & 20A, 125V




Pass & Seymour

Technical Specifications


3rd Party Compliance	
UL Listed, File Number E140596, Standard UL498.	
Federal Specification WC596, Hospital Grade.	
CSA/CUL approved, File Number LR16063, Standard CSA-C22.2 No. 42.	

Performance	
Electrical	
Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current
Mechanical	
Terminal Identification	Terminal Identification in accordance with UL498 (Brass, White, Green)
Terminal Accommodation	#14 AWG – #10 AWG copper conductor only
Product Identification	Ratings are a permanent part of the device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C (without impact)

Materials			
Face	Nylon	Terminal Screws	#8 Tri-Drive Steel
Back Body	PVC		(Neutral = Nickel-Plated Steel)
Line Contacts	.032 688 Brass	Ground Screw	#8 Hex Tri-Drive Steel
Mounting Strap	.042 Zinc-Plated Steel	Assembly Drive Screw	Zinc-Plated Steel
Ground Contacts	.040 260 Brass	Auto-Ground Clip	Stainless Steel
Pressure Plate	.080 Steel	Mounting Screws	Tri-Drive Steel

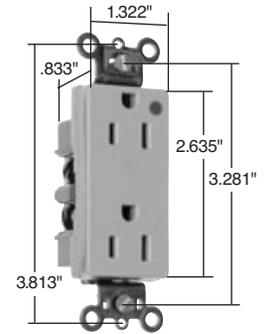

Dimensions for
15 & 20 Amp

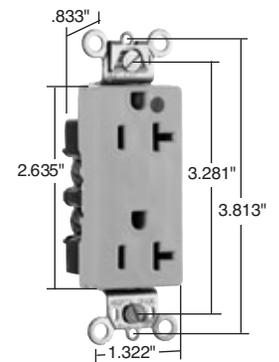

Dimensions for
15 & 20 Amp Illuminated

Warranty

1 Year

Complimentary Devices & Accessories




HOSPITAL GRADE DEVICES

- Receptacles, Tamper-Resistant, Decorator
- GFCIs
- TVSS
- Isolated Ground
- Plugs & Connectors




DECORATOR DEVICES

- Construction Grade Switches
- Construction Grade Illuminated & Pilot Lighted Switches
- Construction Grade Receptacles
- Commercial Grade Receptacles
- Construction Grade Hallway Lights

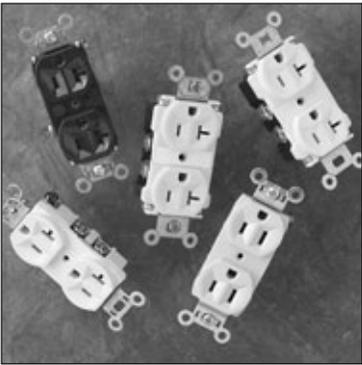

STRAIGHT BLADE RECEPTACLES

- Extra Heavy-Duty
- Heavy-Duty
- Construction Grade
- Commercial Grade

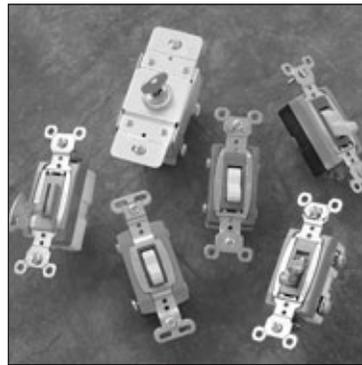

SWITCHES

- Heavy-Duty Toggle
- Heavy-Duty Lighted Toggle
- Heavy-Duty Security
- Heavy-Duty Locking
- Construction Grade Toggle
- Commercial Grade Toggle



GFCIs

- Construction Grade with Auto-Ground
- Construction Grade
- Construction Grade Dead Front



WALL PLATES

- TradeMaster® Thermoplastic Nylon
- Stainless Steel
- Brass
- Aluminum
- Dustproof Stainless Steel Covers

Also available...

- Light Almond Devices
- PlugTail™ Devices
- TVSS & Isolated Ground Devices
- Ground Continuity Monitoring (GCM)
- Straight Blade Plugs & Connectors
- Turnlok® Locking Devices
- Weatherproof Boxes & Covers
- IEC 309 Industrial Products
- Flexcor® Wire Mesh Grips
- Configurable Solutions



Legrand/Pass & Seymour
P.O. Box 4822
Syracuse, NY 13221-4822
800-223-4185

North America Headquarters
60 Woodlawn Street
West Hartford, CT 06110
Phone: 1.877.BY.LEGRAND (295.3472)
Fax: 1.860.232.2062
www.legrand.us

Legrand Canada
570 Applewood Crescent
Vaughan, ON, L4K 4B4
Phone: 905.738.9195
Fax: 905.738.9721
www.legrand.ca

SF707R1 — Updated January 2004 — For latest specs visit www.legrand.us/passandseymour