




Pass & Seymour

Hospital Grade Devices Heavy-Duty Decorator Receptacles IG 15 & 20A, 125V

IG26262-HG, IG26362-HG

Sleek style, backed by rugged construction.

It is easy to clean the smooth, tough nylon faces on these isolated ground receptacles. And the receptacles are easy to install, too. They feature tri-drive terminal and mounting screws, auto-ground and the exclusive P&S screw-pressure-plate back wiring system (which also supports side wiring). A sturdy, corrosion-resistant strap locks into the receptacle body for added strength.

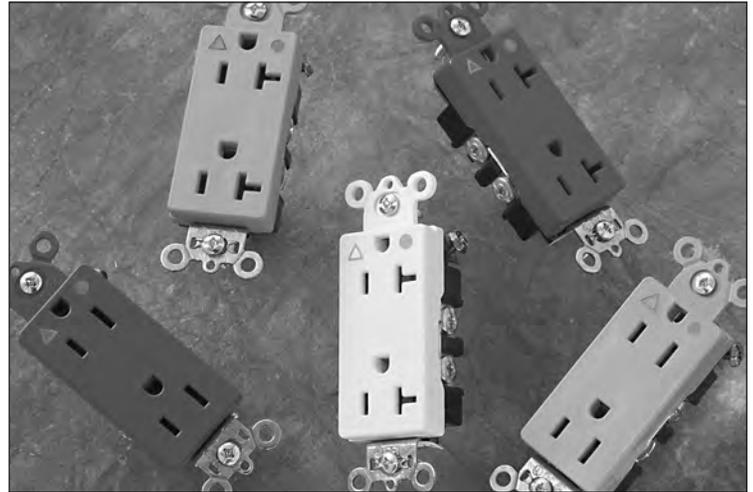

Features & Benefits

IG symbol and molded-in "Isolated Ground" markings for fast I.D. and circuit delineation.

Nylon strap on top eliminates potential contact with isolated ground.

.032 inch thick, brass, triple-wipe power contacts for lasting retention.

Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.

Two drive screws anchor strap to back body and face where abrupt removal torque is strongest.

Tri-drive steel terminal screws. Internal screw-pressure-plate back and side wire capability. Two back wire holes for more wiring flexibility.

Corrosion-resistant, plated steel strap locked in to face and back body to resist pulling away from face/body assembly.

Auto-ground eliminates the necessity to terminate grounding conductor to device.

IG26362-HG

Field Uses/Vertical Markets

■ Health Care

■ Education

■ Institutional



Pass & Seymour

Hospital Grade Devices Heavy-Duty Decorator Receptacles IG 15 & 20A, 125V

Ordering Information

Catalog Number	Rating A. V.	Color	NEMA Config. No.
Hospital Ground Isolated Ground Duplex Receptacles Back & Side Wire			
IG26262-HG	15 125	Orange	5-15R
IG26262-HGRED	15 125	Red	5-15R
IG26362-HGW	20 125	White	5-20R
IG26362-HG	20 125	Orange	5-20R
IG26362-HGRED	20 125	Red	5-20R



NEMA
5-15R



NEMA
5-20R

For more information on these and other P&S products refer to our Product Guide or visit our web site.

SF713R1 — Updated January 2004 — For latest specs visit www.legrand.us/passandseymour

Hospital Grade Devices Heavy-Duty Decorator Receptacles IG 15 & 20A, 125V




Pass & Seymour

Technical Specifications

3rd Party Compliance	
UL Listed, File Number E140596, Standard UL498.	
Federal Specification WC596, Hospital Grade.	
CSA/CUL approved, File Number LR16063, Standard CSA-C22.2 No. 42.	

Performance	
Electrical	
Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current
Mechanical	
Terminal Identification	Terminal Identification in accordance with UL498 (Brass, White, Green)
Terminal Accommodation	#14 AWG – #10 AWG copper conductor only
Product Identification	Ratings are a permanent part of the device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C (without impact)

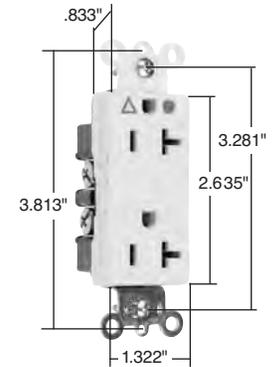

Dimensions for
15 & 20 Amp

Materials			
Face	Nylon	Terminal Screws	#8 Tri-Drive Steel
Back Body	PVC		(Neutral = Nickel-Plated Steel)
Line Contacts	.032 688 Brass	Ground Screw	#8 Hex Tri-Drive Steel
Mounting Strap	.042 Zinc-Plated Steel	Assembly Drive Screw	Zinc-Plated Steel
Ground Contacts	.040 260 Brass	Auto-Ground Clip	Stainless Steel
Pressure Plate	.080 Steel	Mounting Screws	Tri-Drive Steel

Warranty

1 Year

Complementary Devices & Accessories



HOSPITAL GRADE DEVICES

- Receptacles, Tamper-Resistant, Decorator
- GFCIs
- TVSS
- Isolated Ground
- Plugs & Connectors




DECORATOR DEVICES

- Construction Grade Switches
- Construction Grade Illuminated & Pilot Lighted Switches
- Construction Grade Receptacles
- Commercial Grade Receptacles
- Construction Grade Hallway Lights




TVSS & ISOLATED GROUND DEVICES

- Construction Grade Isolated Ground
- Heavy-Duty Turnlok® Isolated Ground
- Heavy-Duty Isolated Ground TVSS
- Heavy-Duty TVSS
- Construction Grade TVSS

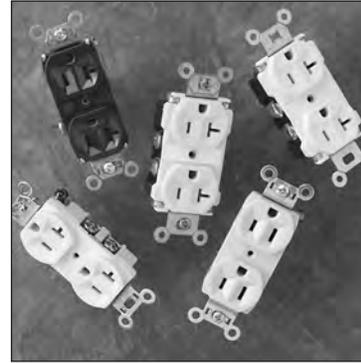


STRAIGHT BLADE RECEPTACLES

- Extra Heavy-Duty
- Heavy-Duty
- Construction Grade
- Commercial Grade

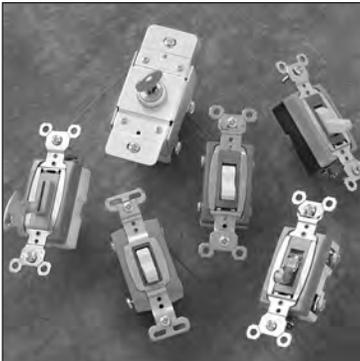

SWITCHES

- Heavy-Duty Toggle
- Heavy-Duty Lighted Toggle
- Heavy-Duty Security
- Heavy-Duty Locking
- Construction Grade Toggle
- Commercial Grade Toggle

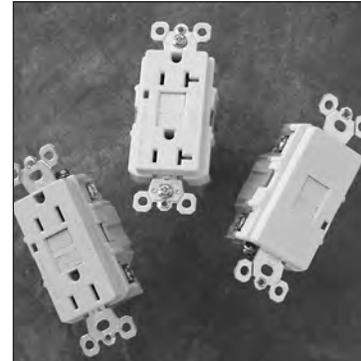

GFCIs

- Construction Grade with Auto-Ground
- Construction Grade
- Construction Grade Dead Front

Also available...

- Light Almond Devices
- PlugTail™ Devices
- Ground Continuity Monitoring (GCM)
- Straight Blade Plugs & Connectors
- Turnlok® Locking Devices
- Weatherproof Boxes & Covers
- Wall Plates
- IEC 309 Industrial Products
- Flexcor® Wire Mesh Grips
- Configurable Solutions



Legrand/Pass & Seymour
P.O. Box 4822
Syracuse, NY 13221-4822
800-223-4185

North America Headquarters
60 Woodlawn Street
West Hartford, CT 06110
Phone: 1.877.BY.LEGRAND (295.3472)
Fax: 1.860.232.2062
www.legrand.us

Legrand Canada
570 Applewood Crescent
Vaughan, ON, L4K 4B4
Phone: 905.738.9195
Fax: 905.738.9721
www.legrand.ca