


# Pass & Seymour

# Hospital Grade Devices PlugTail™ Receptacles Isolated Ground 15 & 20A, 125V

## PTIG8200, PTIG8300

# PlugTail<sup>™</sup>. The fastest, most consistent and reliable wiring devices — ever.

actory-terminated devices and connectors mean that device installation is the same regardless of skill level of the installer. The UL-Listed connectors are keyed to ensure proper wiring installation into each receptacle. The connector simply snaps into the back of the device — no fussing with wires, stripping, or tightening screws. PlugTail devices are finger safe with no exposed terminals, so taping is not required. Now device installation is a snap! The toughest and safest hospital grade isolated ground receptacle available.

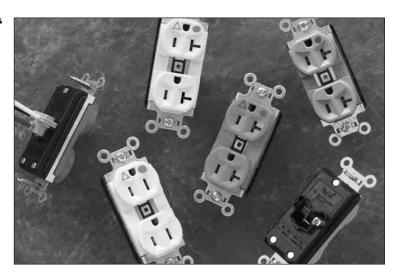

#### **Features & Benefits**

**Auto-ground clip** assures positive ground.

**Built-in connector** features large brass terminal blades to ensure consistent, reliable electrical connections.

Large brass contacts snugly terminate on device blade terminals. Audible snapping latch assures connection, allows release.

Ultrasonically welded

finger safe housing.

**Pre-stripped** 

leads fasten to conductors, easier than standard

connector

pigtails.

polycarbonate connector

housing secures terminations

and conductors in a UL Listed,

**Plastic barrier** isolates grounding terminal from mounting strap and metal boxes.

.036 inch thick, brass, triple-wipe power contacts for lasting retention.

Three drive screws anchor strap to back body and face.

Plated steel wrap strap design for maximum durability and corrosion resistance.



No exposed terminals create a finger safe application before, during, and after installation.

# Field Uses/Vertical Markets

Health Care

Education

Institutional



# Hospital Grade Devices PlugTail™ Receptacles Isolated Ground 15 & 20A, 125V

## **Ordering Information**

Catalog Number	Rati	ng V.	Color	NEMA Config. No.	
Duplex Receptacles					
PTIG8200-I	15	125	lvory	5-15R	
PTIG8200	15	125	Orange	5-15R	
PTIG8200-RED	15	125	Red	5-15R	
PTIG8300-I	20	125	lvory	5-20R	
PTIG8300	20	125	Orange	5-20R	

Catalog Number	Wire Type	Wire Length				
PlugTail Connectors – Right Angle						
PTRA6STR PTRA6SOL	Stranded Solid	6" 6"				





NEMA 5-15R

# Hospital Grade Devices PlugTail™ Receptacles Isolated Ground 15 & 20A, 125V



## **Technical Specifications**

#### **3rd Party Compliance**

cULus Listed, File Number E140596, Standard UL498. Federal Specification WC596, Hospital Grade.


#### **Performance** Electrical Dielectric Voltage Withstands 2000V minimum Maximum Working Voltage 125V Current Interrupting Certified for current interrupting at full-rated current (receptacle only) Temperature Rise Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current Mechanical PlugTail Connector Identification #12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only Product Identification Ratings are a permanent part of the device **Environmental** Flammability UL94 V2 Operating Temperature Maximum continuous +60°C, minimum -40°C without impact

Plug Tail Receptacle Materials						
Face	Nylon	Strap Isolator Assembly Drive Screw Auto-Ground Clip Mounting Screws	Nylon			
Back Body	PVC		Zinc-Plated Steel			
Line Contacts	.036 688 Brass		Steel			
Mounting Strap	.042 Zinc-Plated Steel		Tri-Drive Steel			

Plug Tail Connector Materials					
Housing	Polycarbonate	Contacts	.030 Brass		

#### Warranty

1 Year



Dimensions for 15 & 20 Amp






### **Complementary Devices & Accessories**




# HOSPITAL GRADE DEVICES

- Receptacles, Tamper-Resistant, Decorator
- GFCIs
- **■** TVSS
- Isolated Ground
- Plugs & Connectors



#### **PLUGTAIL™ DEVICES**

- Spec Grade
- Decorator
- Hospital Grade
- Tamper-Resistant
- Isolated Ground



# STRAIGHT BLADE RECEPTACLES

- Extra Heavy-Duty
- Heavy-Duty
- Construction Grade
- Construction Grade Leaded
- Commercial Grade



#### **SWITCHES**

- Extra Heavy-Duty
- Extra Heavy-Duty Lighted
- Extra Heavy-Duty Security
- Extra Heavy-Duty Locking
- Hard Use
- Commercial Grade



#### **GFCIs**

- Specification Grade
- Dead Front



## WALL PLATES

- TradeMaster® Thermoplastic Nylon
- Screwless Polycarbonate
- Stainless Steel
- Brass
- Aluminum
- Dustproof Stainless Steel Covers

### Also available...

- Light Almond Devices
- Decorator Devices
- TVSS & Isolated Ground Devices
- Ground Continuity Monitoring (GCM)
- Straight Blade Plugs & Connectors
- Turnlok® Locking Devices
- Weatherproof Boxes & Covers
- IEC 309
   Industrial Products
- Flexcor® Wire Mesh Grips
- Configurable Solutions



**Legrand/Pass & Seymour** P.O. Box 4822

Syracuse, NY 13221-4822 800-223-4185 North America Headquarters 60 Woodlawn Street

West Hartford, CT 06110 Phone: 1.877.BY.LEGRAND (295.3472) Fax: 1.860.232.2062 www.legrand.us Legrand Canada 570 Applewood Crescent Vaughan, ON, L4K 4B4 Phone: 905.738.9195 Fax: 905.738.9721 www.legrand.ca