



Pass & Seymour

Decorator Switches PlugTail™ Devices Spec Grade 15 & 20A, 120/277VAC

PT2601, PT2621, PT2603, PT2623, PT2625, PT2626

PlugTail™. The fastest, most consistent and reliable wiring devices – ever.

Factory-terminated devices and connectors mean that device installation is the same regardless of skill level of the installer. The UL-Listed connectors are keyed to ensure proper wiring installation into each receptacle. The connector simply snaps into the back of the device – no fussing with wires, stripping, or tightening screws. PlugTail devices are finger safe with no exposed terminals, so taping is not required. Now device installation is a snap!



FEATURES & BENEFITS

Heavy-gauge steel strap for superior strength.

Auto-ground clip assures positive ground.

Shallow design for easier installation.


No exposed terminals create a finger safe application before, during, and after installation.

Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.

Large brass contacts snugly terminate on device blade terminals. Audible snapping latch assures connection, allows release.

Polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.

Pre-stripped connector leads fasten to conductors, easier than standard pigtails.

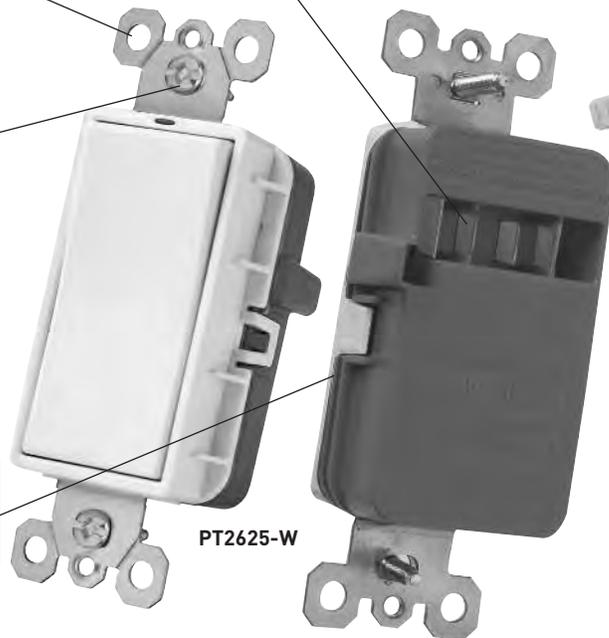

FIELD USES/VERTICAL MARKETS

- Education
- Institutional
- Retail
- Office
- Hospitality/Lodging
- Multiple Dwelling



Pass & Seymour

Decorator Switches PlugTail™ Devices Spec Grade 15 & 20A, 120/277VAC

ORDERING INFORMATION

Catalog Number	Rating		Color
	A.	VAC	
Single Pole Decorator Switches			
PT2601I	15	120/277	Ivory
PT2601W	15	120/277	White
PT2601	15	120/277	Brown
PT2601GRY	15	120/277	Gray
PT2601RED	15	120/277	Red
PT2601BK	15	120/277	Black
PT2601LA	15	120/277	Light Almond
PT2621I	20	120/277	Ivory
PT2621W	20	120/277	White
PT2621	20	120/277	Brown
PT2621GRY	20	120/277	Gray
PT2621RED	20	120/277	Red
PT2621BK	20	120/277	Black
PT2621LA	20	120/277	Light Almond
Single Pole Illuminated Decorator Switches			
PT2625I	20	120/277	Ivory
PT2625W	20	120/277	White
PT2625BK	20	120/277	Black
PT2625LA	20	120/277	Light Almond

Catalog Number	Rating		Color
	A.	VAC	
Three-Way Decorator Switches			
PT2603I	15	120/277	Ivory
PT2603W	15	120/277	White
PT2603	15	120/277	Brown
PT2603GRY	15	120/277	Gray
PT2603RED	15	120/277	Red
PT2603BK	15	120/277	Black
PT2603LA	15	120/277	Light Almond
PT2623I	20	120/277	Ivory
PT2623W	20	120/277	White
PT2623	20	120/277	Brown
PT2623GRY	20	120/277	Gray
PT2623RED	20	120/277	Red
PT2623BK	20	120/277	Black
PT2623LA	20	120/277	Light Almond
Three-Way Illuminated Decorator Switches			
PT2626I	20	120/277	Ivory
PT2626W	20	120/277	White
PT2626BK	20	120/277	Black
PT2626LA	20	120/277	Light Almond

Catalog Number	Description
Plugtail Jumper	
PTJ	Plugtail Tail Cover for Rough In

Catalog Number	Rating VAC	Wire Type	Wire Length	Wire Colors
PlugTail Connectors for Single Pole Switches				
PTS6STR3	120/277	3 Wire Stranded	6"	Green, Black, Black
PTS6SOL3	120/277	3 Wire Solid	6"	Green, Black, Black
PTS6STR3277	120/277	3 Wire Stranded	6"	Green, Brown, Brown
PTS6SOL3277	120/277	3 Wire Solid	6"	Green, Brown, Brown
PlugTail Connectors for Three-Way Switches				
PTS6STR4	120/277	4 Wire Stranded	6"	Green, Red, Red, Black
PTS6SOL4	120/277	4 Wire Solid	6"	Green, Red, Red, Black
PTS6STR4277	120/277	4 Wire Stranded	6"	Green, Brown, Yellow, Yellow
PTS6SOL4277	120/277	4 Wire Solid	6"	Green, Brown, Yellow, Yellow

For more information on these and other P&S products refer to our Catalog or visit our web site.

SF1511R2 — Updated June 2009 — For latest specs visit www.legrand.us/passandseymour

Decorator Switches PlugTail™ Devices Spec Grade 15 & 20A, 120/277VAC



Pass & Seymour

TECHNICAL SPECIFICATIONS

3rd Party Compliance

cULus Listed, File Number E140597, UL20, Standard CSA-C22.2 No. 111, General Use Snap Switches. Federal Specification WS896. Conforms to NEMA WD-1 and WD-6.

Performance

Electrical


Dielectric Withstand Voltage	1500V minimum
Maximum Working Voltage	277VAC 347VAC
Overload	Minimum 4.8 times rated current for 100 cycles
Temperature Rise	30° C maximum at rated current
Maximum Continuous Current	20A
Endurance	50,000 cycles minimum, resistive, inductive, tungsten filament lamp load (Fed Spec)

Mechanical

PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Switches only
Product Identification	Ratings are a permanent part of the device

Environmental

Flammability	UL92 V2
Operating Temperature	Maximum continuous +60°C to, minimum -40°C without impact

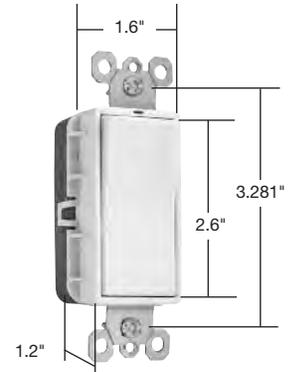

Dimensions for
15 & 20 Amp



PTJ



PlugTail Switch Materials


Front Body	Polycarbonate	Mounting Strap	Steel
Back Body	Polycarbonate	Spring Arm	Brass
Paddle	Thermoplastic Polycarbonate	Spring	Zinc-Plated Steel
Contacts	Silver Cadmium Oxide	Auto Ground Clip	Steel

PlugTail Connector Materials

Housing	Polycarbonate	Contacts	Brass
---------	---------------	----------	-------

Warranty


1 Year

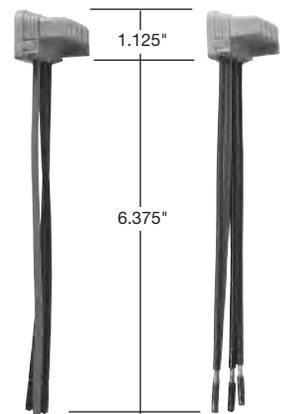

PTS6STR3


PTS6STR4

COMPLEMENTARY DEVICES & ACCESSORIES

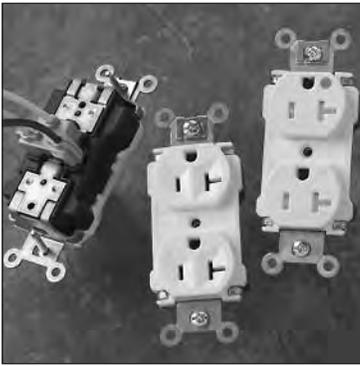


PLUGTAIL™ DEVICES

- Extra Heavy-Duty Spec Grade
- Extra Heavy-Duty Hospital Grade
- Extra Heavy-Duty Tamper-Resistant

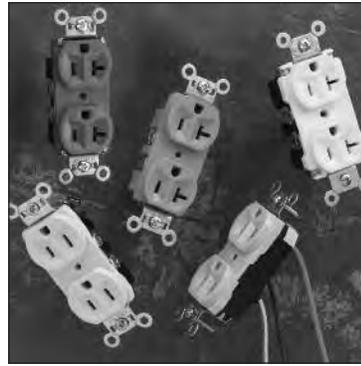


STRAIGHT BLADE RECEPTACLES

- Extra Heavy-Duty
- Heavy-Duty
- Hard Use
- Construction Grade
- Construction Grade Leaded
- Commercial Grade

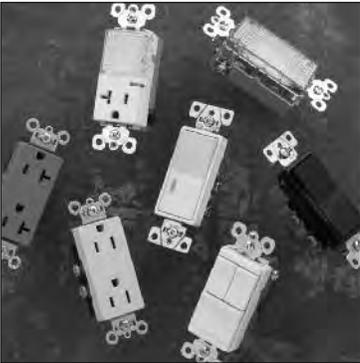


DECORATOR DEVICES

- Construction Grade Switches
- Specification Grade Combo Switches
- Construction Grade Receptacles
- Commercial Grade Receptacles
- Specification Grade Hallway Lights

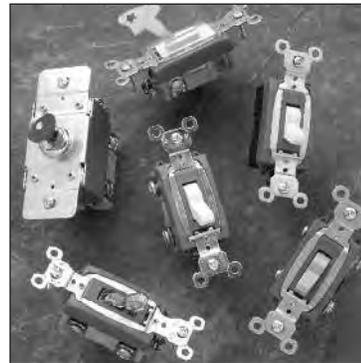

SWITCHES

- Heavy-Duty Toggle
- Heavy-Duty Lighted Toggle
- Heavy-Duty Security
- Heavy-Duty Locking
- Construction Grade Toggle
- Commercial Grade Toggle

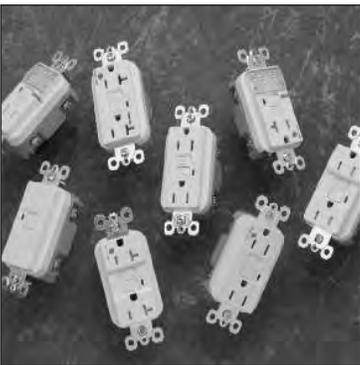

GFCIs

- Specification Grade



WALL PLATES

- TradeMaster® Thermoplastic Nylon
- Screwless Polycarbonate
- Stainless Steel
- Brass
- Aluminum
- Dustproof Stainless Steel Covers

ALSO AVAILABLE...

- | | | | |
|--------------------------------------|-------------------------------------|-------------------------------|----------------------------|
| ■ Hospital Grade Devices | ■ Straight Blade Plugs & Connectors | ■ Weatherproof Boxes & Covers | ■ Flexcor® Wire Mesh Grips |
| ■ TVSS & Isolated Ground Devices | ■ Turnlok® Locking Devices | ■ IEC 309 Industrial Products | ■ Bulk Solutions |
| ■ Ground Continuity Monitoring (GCM) | | | |



Legrand/Pass & Seymour
 P.O. Box 4822
 Syracuse, NY 13221-4822
 800-223-4185

North America Headquarters
 60 Woodlawn Street
 West Hartford, CT 06110
 Phone: 1.877.BY.LEGRAND (295.3472)
 Fax: 1.860.232.2062
 www.legrand.us

Legrand Canada
 570 Applewood Crescent
 Vaughan, ON, L4K 4B4
 Phone: 905.738.9195
 Fax: 905.738.9721
 www.legrand.ca

