

PlugTail™. The fastest, most consistent and reliable wiring devices – ever.

PTTR5262, PTTR5362, PTTR26262, PTTR26362,
PTTR5262SC, PTTR5362SC, PTTR26262SC, PTTR26362SC

Factory-terminated devices and connectors mean that device installation is the same regardless of skill level of the installer. The UL-Listed connectors are keyed to ensure proper wiring installation into each receptacle. The connector simply snaps into the back of the device – no fussing with wires, stripping, or tightening screws. PlugTail devices are finger safe with no exposed terminals, so taping is not required. Now device installation is a snap!

A sturdy mechanical shutter system helps prevent children from sticking objects into the receptacle. The toughest and safest tamper-resistant receptacle available. They are offered in both duplex and Decorator style, in addition to split circuit versions.

Features & Benefits

Auto-ground clip assures positive ground.


Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.

High performance copper alloy contacts snugly terminate on device blade terminals. Audible snapping latch assures connection, allows release.


.036 inch thick, brass, triple-wipe power contacts for lasting retention.

Dual mechanical shutter system to help prevent insertion of foreign objects.

Plated steel wrap strap design for maximum durability and corrosion resistance.

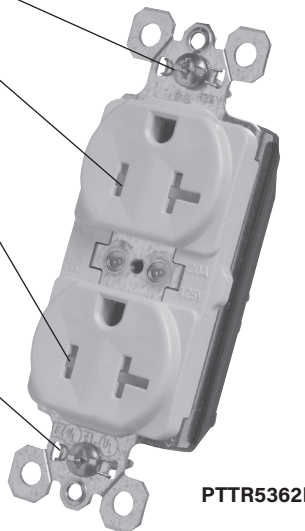

PTTR5362I

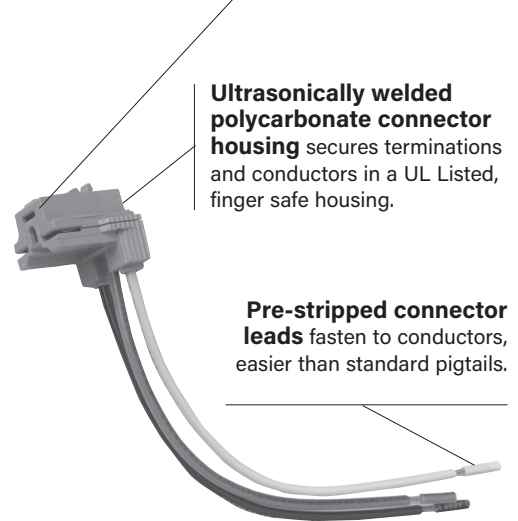

Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.

Pre-stripped connector leads fasten to conductors, easier than standard pigtails.

Split circuit versions are pre-wired with one welded pre-stripped wire lead to facilitate switched receptacle circuit applications.

No exposed terminals create a finger safe application before, during, and after installation.

3rd Party Compliance



cULus Listed, File Number E140596, Standard UL498.
Federal Specification WC596.
Conforms to NEMA WD-1 and WD-6.

Technical Information

Performance

Electrical


Dielectric Withstand Voltage	Withstands 2000V minimum
Maximum Working Voltage	125V
Current Interrupting	Certified for current interrupting at full-rated current (receptacle only)
Temperature Rise	Maximum 30° C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

Mechanical


PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only
Product Identification	Ratings are permanent part of the device

Environmental

Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C (without impact)



Dimensions for
15 & 20 Amp

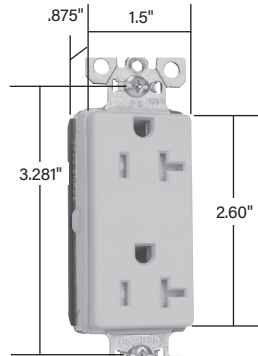

Dimensions for
15 & 20 Amp

PlugTail Receptacle Materials

Face	Nylon	Line Contacts	.036 688 Brass
Integral Ground System	.036 260 Brass	Auto Ground Clip	Steel
Back Body	PVC	Mounting Strap	.042 Zinc-Plated Steel
Assembly Drive Screw	Zinc-Plated Steel	Mounting Screws	Tri-Drive Steel
Tamper Shutter	Thermoplastic		

PlugTail Connector Materials


Housing	Polycarbonate	Contacts	.030 Copper Alloy
---------	---------------	----------	-------------------

Warranty

1 Year



15 & 20 Amp Split
Circuit Versions

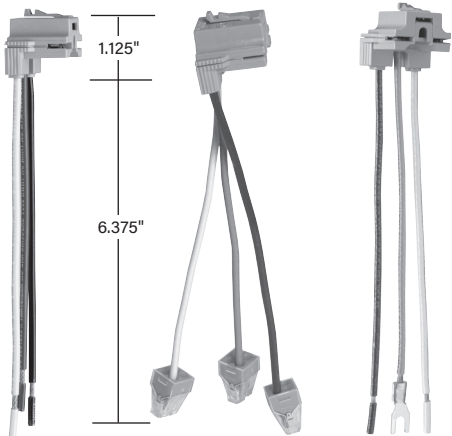

PTR A6STR PTR A6STRBP PTR A6STRG

Ordering Information

Duplex Receptacles

Catalog Number	Ratings	Color	NEMA Config.
PTTR5262I	15A 125V	Ivory	5-15R
PTTR5262W	15A 125V	White	5-15R
PTTR5262	15A 125V	Brown	5-15R
PTTR5262BK	15A 125V	Black	5-15R
PTTR5262LA	15A 125V	Light Almond	5-15R
PTTR5362I	20A 125V	Ivory	5-20R
PTTR5362W	20A 125V	White	5-20R
PTTR5362	20A 125V	Brown	5-20R
PTTR5362BK	20A 125V	Black	5-20R
PTTR5362LA	20A 125V	Light Almond	5-20R

Split Circuit Duplex Receptacles with 6" Lead

Catalog Number	Ratings	Color	NEMA Config.
PTTR5262SCI	15A 125V	Ivory	5-15R
PTTR5262SCW	15A 125V	White	5-15R
PTTR5262SC	15A 125V	Brown	5-15R
PTTR5262SCBK	15A 125V	Black	5-15R
PTTR5262SCLA	15A 125V	Light Almond	5-15R
PTTR5362SCI	20A 125V	Ivory	5-20R
PTTR5362SCW	20A 125V	White	5-20R
PTTR5362SC	20A 125V	Brown	5-20R
PTTR5362SCBK	20A 125V	Black	5-20R
PTTR5362SCLA	20A 125V	Light Almond	5-20R

PlugTail Connectors - Right Angle

Catalog Number	Wire Type	Wire Length
PTRA6SOL	Solid	6"
PTRA6STR	Stranded	6"
PTRA6SOLB25	Solid	25"
PTRA6STRB25	Stranded	25"

PlugTail Connectors - Right Angle

PTRA6SOL	Solid	6"
PTRA6STR	Stranded	6"

PlugTail Connectors - Right Angle

PTRA6SOLG	Solid	6"
PTRA6STRG	Stranded	6"

Decorator Receptacles

Catalog Number	Ratings	Color	NEMA Config.
PTTR26262I	15A 125V	Ivory	5-15R
PTTR26262W	15A 125V	White	5-15R
PTTR26262	15A 125V	Brown	5-15R
PTTR26262BK	15A 125V	Black	5-15R
PTTR26262LA	15A 125V	Light Almond	5-15R
PTTR26362I	20A 125V	Ivory	5-20R
PTTR26362W	20A 125V	White	5-20R
PTTR26362	20A 125V	Brown	5-20R
PTTR26362BK	20A 125V	Black	5-20R
PTTR26362LA	20A 125V	Light Almond	5-20R

Split Circuit Decorator Receptacles with 6" Lead

Catalog Number	Ratings	Color	NEMA Config.
PTTR26262SCI	15A 125V	Ivory	5-15R
PTTR26262SCW	15A 125V	White	5-15R
PTTR26262SC	15A 125V	Brown	5-15R
PTTR26262SCBK	15A 125V	Black	5-15R
PTTR26262SCLA	15A 125V	Light Almond	5-15R
PTTR26362SCI	20A 125V	Ivory	5-20R
PTTR26362SCW	20A 125V	White	5-20R
PTTR26362SC	20A 125V	Brown	5-20R
PTTR26362SCBK	20A 125V	Black	5-20R
PTTR26362SCLA	20A 125V	Light Almond	5-20R




Vertical Markets

- | | | |
|-----------------|-----------------------|-------------|
| ▪ Office/Retail | ▪ Institutional | ▪ MDU |
| ▪ Entertainment | ▪ Hospitality/Lodging | ▪ Education |

Also available...

- | | | |
|--------------------------------------|-------------------------------------|-------------------------------|
| ▪ Hospital Grade Devices | ▪ Straight Blade Plugs & Connectors | ▪ IEC 309 Industrial Products |
| ▪ TVSS & Isolated Ground Devices | ▪ Turnlok® Locking Devices | ▪ Flexcor® Wire Mesh Grips |
| ▪ Ground Continuity Monitoring (GCM) | ▪ Weatherproof Boxes & Covers | ▪ Bulk Solutions |

 The paper used to print this document is an environmentally responsible paper with 10% post consumer waste, with FSC and SFI Chain of Custody certifications, Lacey Act compliant. 100% of the electricity used to manufacture Flo sheets is generated with Green-e certified renewable energy.

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.



Legrand, North America
60 Woodlawn Street
West Hartford, CT 06110
1.877.BY.LEGRAND (295.3472)
www.legrand.us

Canada
905.738.9195
www.legrand.ca

