



## PASS & SEYMOUR® Hospital Grade Devices Heavy-Duty Decorator Receptacles Tamper-Resistant 15 & 20A, 125V



TR26262HGLA


TR26362HGI

### Sturdy tamper-resistant receptacles in Decorator-style.

TR26262HG, TR26362HG

Sleek, ergonomic Decorator-style matches other Decorator devices while giving the same performance and ease of installation as our standard tamper-resistant devices. The thermoplastic dual mechanical shutter system helps prevent children from sticking objects into the receptacle. They feature screw-pressure-plate back wiring and a back wire clamp on the ground terminal.

### Features & Benefits

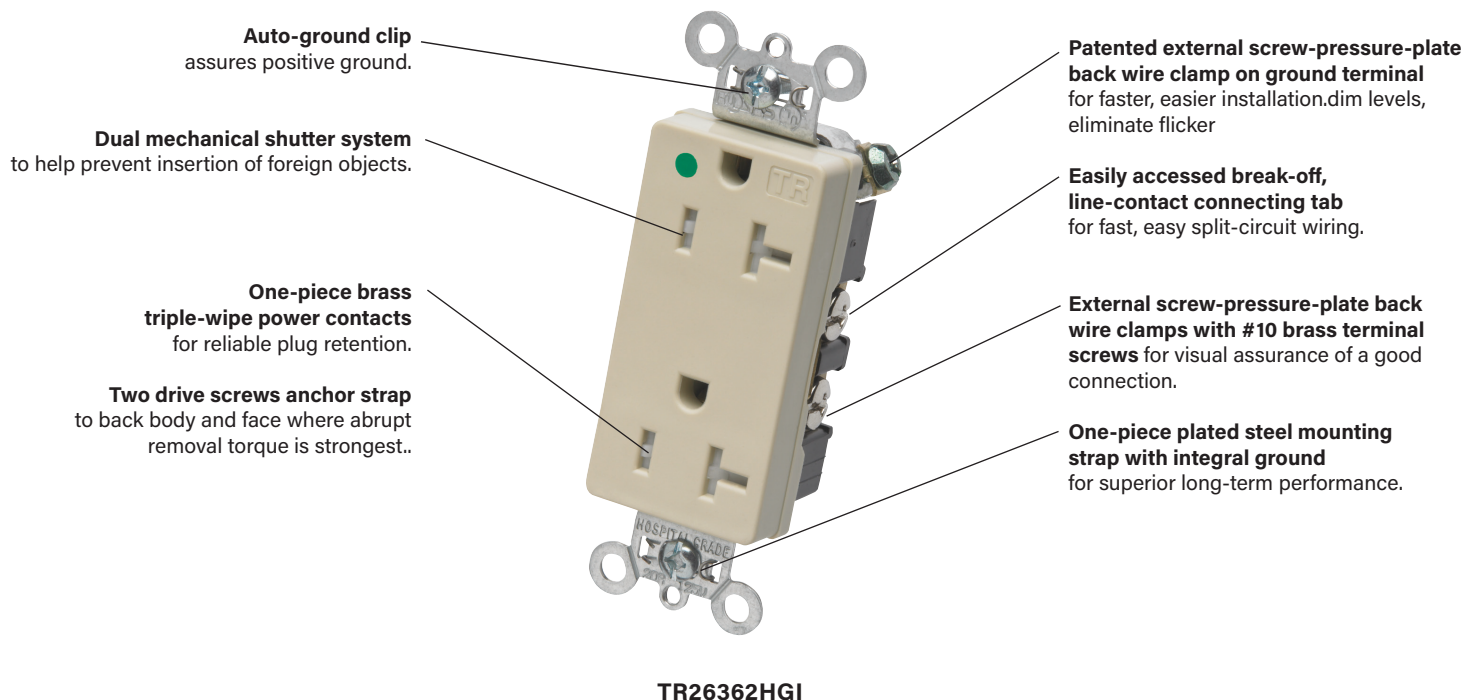

### Compliance



UL Listed, File Number E140596, Standard UL498.

Federal Specification WC596, Hospital Grade.

CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42.

Conforms to NEMA WD-1 and WD-6.

## Technical Information

### Performance

#### Electrical

Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

#### Mechanical


Terminal Identification	Terminal Identification in accordance with UL498 (Brass, White, Green)
Terminal Accommodation	#14 AWG – #10 AWG copper conductor only
Product Identification	Ratings are a permanent part of the device

#### Environmental

Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

#### Materials

Face	Nylon
Back Body	Nylon
Line Contacts	.036 688 Brass
Mounting Strap	Plated Steel
Ground Contacts	Strap with Integral Ground
Pressure Plate	.031 260 Brass
Tamper Shutter	Thermoplastic
Terminal Screws	#10 Tri-Drive Brass (Neutral = Nickel-Plated Steel)
Ground Screw	#10 Hex Tri-Drive Brass
Assembly Drive Screw	Zinc-Plated Steel
Auto-Ground Clip	Steel
Mounting Screws	Tri-Drive Steel

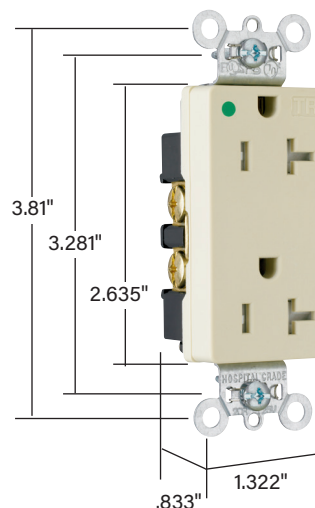

**Dimensions for 15 & 20 Amp  
TR26362HGI**

### Warranty

1 Year

## Ordering Information - Duplex Receptacles Back & Side Wire

Catalog Number	Rating		Color	NEMA Config. No.
	A.	V.		
TR26262HGI	15	125	Ivory	5-15R
TR26262HGW	15	125	White	5-15R
TR26262HG	15	125	Brown	5-15R
TR26262HGGRY	15	125	Gray	5-15R
TR26262HGBK	15	125	Black	5-15R
TR26262HGRED	15	125	Red	5-15R
TR26262HGLA	15	125	Light Almond	5-15R
TR26362HGI	20	125	Ivory	5-20R
TR26362HGW	20	125	White	5-20R
TR26362HG	20	125	Brown	5-20R
TR26362HGGRY	20	125	Gray	5-20R
TR26362HGBK	20	125	Black	5-20R
TR26362HGRED	20	125	Red	5-20R
TR26362HGLA	20	125	Light Almond	5-20R



NEMA  
5-15R



NEMA  
5-20R

## Vertical Markets

- Health Care
- Institutional
- Education
- Multiple Dwelling

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.



**Legrand, North America**  
60 Woodlawn Street  
West Hartford, CT 06110  
877-295-3472  
www.legrand.us

**Canada**  
844-977-3783  
www.legrand.ca

FOLLOW US

