



**PASS & SEYMOUR®**

PlugTail® Hard Use Hospital Grade

Tamper-Resistant Receptacles 15 & 20A, 125V



PTTR8200W

PTTR8300W

## PlugTail® Hard Use Hospital Grade Tamper-Resistant Receptacles. The fastest, most consistent and reliable wiring devices — ever.

PTTR8200, PTTR8300

Factory-terminated devices and connectors mean that device installation is the same regardless of skill level of the installer. The UL-Listed connectors are keyed to ensure proper wiring installation into each hospital grade receptacle. The connector simply snaps into the back of the device — no fussing with wires, stripping, or tightening screws. PlugTail devices are finger safe with no exposed terminals, so taping is not required. Now device installation is a snap!

PlugTail...The toughest and safest hospital grade receptacle

### Features & Benefits

**Auto-ground clip** assures positive ground.

**.036 inch thick, brass, triple-wipe power contacts** for lasting retention.

**Plated steel strap design** for maximum durability and corrosion resistance.



PTTR8300W

**Built-in connector** features large brass terminal blades to ensure consistent, reliable electrical connections.


**No exposed terminals** before, during, or after installation increases safety at all phases of product life.

**Ultrasonically welded polycarbonate connector housing** secures terminations and conductors in a UL Listed, finger-safe housing.

**Pre-stripped connector leads** fasten to conductors, easier than standard pigtails.



**Large brass contacts** snugly terminate on device blade terminals. Audible snapping latch assures connection, allows release.

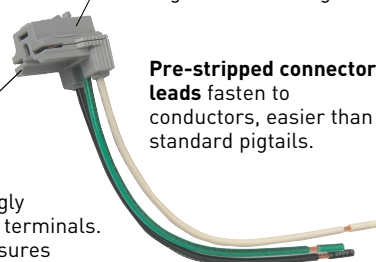

### Compliance



cUL Listed, File Number E140596, Standard UL498. UN SPSC: 3912406  
Federal Specification WC596, Hospital Grade, CSA Listing: C22.2 No. 42.

## Technical Information

### Performance

#### Electrical

Dielectric Withstand Voltage	Withstands 2000V minimum
Maximum Working Voltage	125V
Current Interrupting	Certified for current interrupting at full-rated current (receptacle only)
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

#### Mechanical

PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only
Product Identification	Ratings are permanent part of the device

#### Environmental

Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

### Materials

Face	Nylon
Body	PVC
Contacts	.036 688 Brass
Mounting Strap	.042 Zinc-Plated Steel
Assembly Drive Screw	Zinc-Plated Steel
Auto-Ground Clip	Steel
Mounting Screws	Tri-Drive Steel

### PlugTail Connector Materials

Housing	Polycarbonate
Contacts	.036 688 Brass

### Warranty


1 Year

### Country of Origin


Mexico

### Buy America Act Status

Trade Agreement Act Compliant

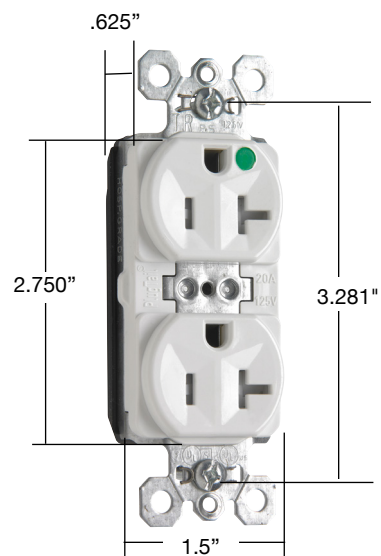

**PTTR8200W**


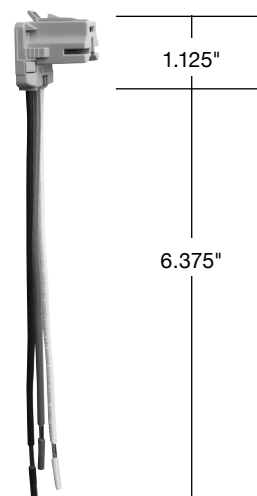


**PTRA65TR**

## Ordering Information


### PlugTail® Hard Use Hospital Grade Tamper-Resistant Receptacles

Catalog Number	Rating			NEMA Config. No.	3rd Party Compliance
	A	VAC	Color		
PTTR8200I	15	125	Ivory	5-15R	•
PTTR8200RED	15	125	Red	5-15R	•
PTTR8200W	15	125	White	5-15R	•
PTTR8300I	20	125	Ivory	5-20R	•
PTTR8300GRY	20	125	Gray	5-20R	•
PTTR8300RED	20	125	Red	5-20R	•
PTTR8300W	20	125	White	5-20R	•
PTTR8300BK	20	125	Black	5-20R	•
PTTR8300LA	20	125	Light Almond	5-20R	•
PTTR8300	20	125	Brown	5-20R	•



### PlugTail® Connectors – Right Angle

Catalog Number	Wire Type	Length
PTRA6STR	#12 AWG Stranded	6 inches
PTRA6SOL	#12 AWG Solid	6 inches



PTRA6STR

---

## Also available

- |                                      |                                     |                               |                                     |
|--------------------------------------|-------------------------------------|-------------------------------|-------------------------------------|
| • SPD & Isolated Ground Devices      | • Straight Blade Plugs & Connectors | • Weatherproof Boxes & Covers | • Bulk Solutions                    |
| • Ground Continuity Monitoring (GCM) | • USB Charging Devices              | • IEC 309 Industrial Products | • SteriGuard® Antimicrobial Devices |
|                                      | • Turnlok® Locking Devices          | • Flexcor® Wire Mesh Grips    |                                     |

---

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.



**Legrand, North America**  
60 Woodlawn Street  
West Hartford, CT 06110  
1.877.BY.LEGRAND (295.3472)  
[www.legrand.us](http://www.legrand.us)  
905.738.9195  
[www.legrand.ca](http://www.legrand.ca)

