



PASS & SEYMOUR® Straight Blade Receptacles Extra Heavy-Duty 15 & 20A, 125 & 250V


Expressly designed for
maximum durability.

5262-A, CR6200, 5362-A, CR6300, 5662-A, 5862-A

With their extra-heavy brass straps locked into impact-resistant nylon faces and back bodies, these receptacles are ready for the toughest environments. They are available in corrosion-resistant versions, too, with nickel-plated straps and contacts. They install easily, thanks to external screw-pressure-plate back wiring for all terminals, including the ground.



5262ABK

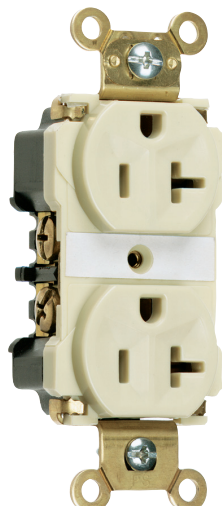

5362AI

Features & Benefits


Auto-ground eliminates the necessity to terminate grounding conductor to device.

.036 inch thick, brass, triple-wipe power contacts for lasting retention.

Exclusive patented feature, circuit label on face allows permanent circuit identification.

Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.

External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.

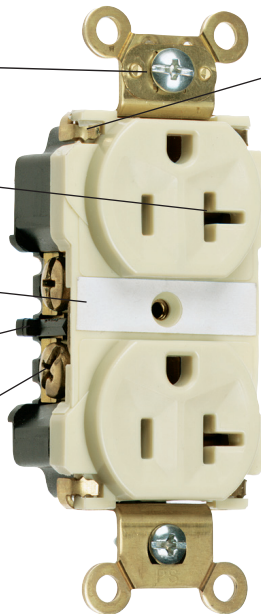

5362AI

Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.

Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.

Two drive screws anchor strap to back body and face where abrupt removal torque is strongest.

3rd Party Compliance



UL Listed, File Number E140596, Standard UL498.

Federal Specification WC596.

CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42.

Technical Information

Performance

Electrical

Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

Mechanical

Terminal Identification	Terminal Identification in accordance with UL498 (Brass, White, Green)
Terminal Accommodation	#14 AWG - #10 AWG copper conductor only
Product Identification	Ratings are a permanent part of the device


Environmental

Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact


Materials

Face	Nylon
Back Body	Nylon
Line Contacts	.036 688 Brass*
Mounting Strap	.050 688 Brass*
Ground Contacts	Strap with Integral Ground*
Pressure Plate	.031 260 Brass*
Terminal Screws	#10 Tri-Drive Brass (Neutral = Nickel-Plated Steel)
Ground Screw	#10 Hex Tri-Drive Brass
Assembly Drive Screw	Zinc-Plated Steel
Auto-Ground Clip	Brass*
Mounting Screws	Tri-Drive Steel*

*CR6200 and CR6300 are Nickel-Plated Steel.

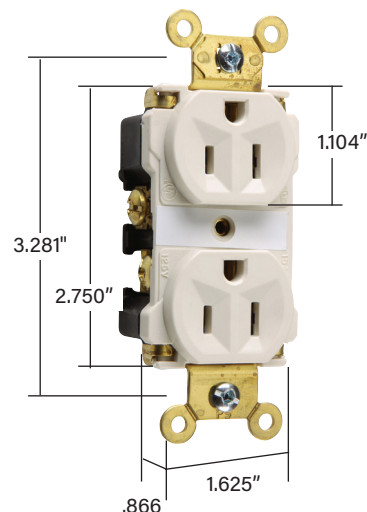

**Dimensions for
15 & 20 Amp
5262ALA**

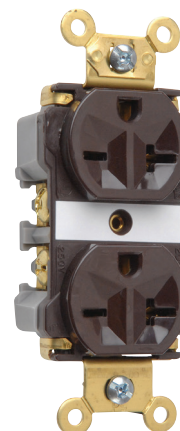

5862A

Warranty

1 Year

Ordering Information - Duplex Receptacles Back & Side Wire

Catalog Number	Rating		Color	NEMA Config. No.
	A.	V.		
5262AI	15	125	Ivory	5-15R
5262AW	15	125	White	5-15R
5262A	15	125	Brown	5-15R
5262AGRY	15	125	Gray	5-15R
5262ABK	15	125	Black	5-15R
5262ARED	15	125	Red	5-15R
5262ALA	15	125	Light Almond	5-15R
*CR6200	15	125	Yellow	5-15R
5362AI	20	125	Ivory	5-20R
5362AW	20	125	White	5-20R
5362A	20	125	Brown	5-20R
5362AGRY	20	125	Gray	5-20R
5362ABK	20	125	Black	5-20R
5362ARED	20	125	Red	5-20R
5362ALA	20	125	Light Almond	5-20R
*CR6300	20	125	Gray	5-20R
5662AI	15	125	Ivory	6-15R
5662AW	15	125	White	6-15R
5662A	15	125	Brown	6-15R
5662AGRY	15	125	Gray	6-15R
5662ABK	15	125	Black	6-15R
5662ARED	15	125	Red	6-15R
5862AI	20	250	Ivory	6-20R
5862AW	20	250	White	6-20R
5862A	20	250	Brown	6-20R
5862AGRY	20	250	Gray	6-20R
5862ABK	20	250	Black	6-20R
5862ARED	20	250	Red	6-20R
5862AOR	20	250	Orange	6-20R
5862ALA	20	250	Light Almond	6-20R



NEMA
5-15R



NEMA
5-20R



NEMA
6-15R



NEMA
6-20R

*Corrosion-resistant.

Vertical Markets

▪ Industrial

▪ Health Care

▪ Education

▪ Institutional

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.



Legrand, North America
60 Woodlawn Street
West Hartford, CT 06110
877-295-3472
www.legrand.us

Canada
844-977-3783
www.legrand.ca

FOLLOW US

