

Straight Blade Receptacles Extra Heavy-Duty Tamper-Resistant 15 & 20A, 125V


**TR62LA****TR63I**

Extremely durable tamper-resistant receptacles.

TR62, TR63

Heavy-gauge brass straps lock into the 100 percent nylon faces and back bodies ensuring long-term durability. The sturdy mechanical shutter system helps prevent children from sticking objects into the receptacle. Installation is quick and easy, thanks to screw-pressure-plate back wiring (side wiring is supported too). There is even a back wire clamp on the ground terminal.

Features & Benefits

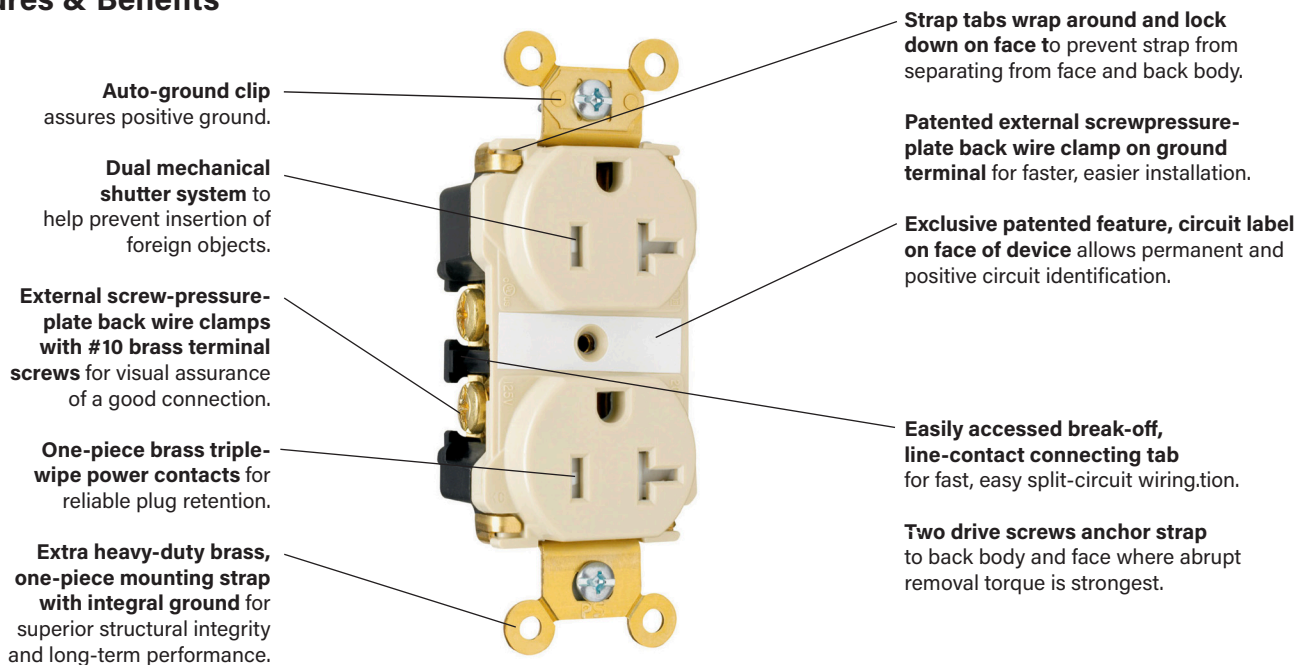**TR63I**

3rd Party Compliance



UL Listed, File Number E140596, Standard UL498.

Federal Specification WC596.

CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42.

Conforms to NEMA WD-1 and WD-6.

Technical Information

Performance

Electrical

Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

Mechanical


Terminal Identification	Terminal Identification in accordance with UL498 (Brass, White, Green)
Terminal Accommodation	#14 AWG – #10 AWG copper conductor only
Product Identification	Ratings are a permanent part of the device

Environmental

Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

Materials

Face	Nylon
Back Body	Nylon
Line Contacts	.036 688 Brass
Mounting Strap	.050 688 Brass
Ground Contacts	Strap with Integral Ground
Pressure Plate	.031 260 Brass
Tamper Shutter	Thermoplastic
Terminal Screws	#10 Tri-Drive Brass (Neutral = Nickel-Plated Steel)
Ground Screw	#10 Hex Tri-Drive Brass
Assembly Drive Screw	Zinc-Plated Steel
Auto-Ground Clip	Brass
Mounting Screws	Tri-Drive Steel

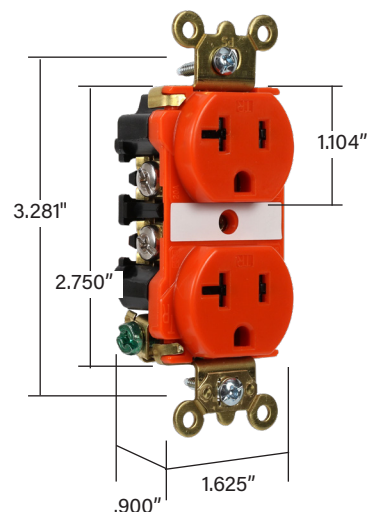



**Dimensions for
15 & 20 Amp
TR63OR**

Warranty

1 Year

Ordering Information

Straight Blade Receptacles Extra Heavy-Duty Tamper-Resistant Receptacles

Catalog Number	Rating		Color	NEMA Config. No.	 NEMA 5-15R	 NEMA 5-20R
	A.	V.				
TR62	15	125	Brown	5-15R		
TR62BLK	15	125	Black	5-15R		
TR62BLU	15	125	Blue	5-15R		
TR62GRY	15	125	Gray	5-15R		
TR62I	15	125	Ivory	5-15R		
TR62LA	15	125	Light Almond	5-15R		
TR62RED	15	125	Red	5-15R		
TR62W	15	125	White	5-15R		
TR63	20	125	Brown	5-20R		
TR63BLK	20	125	Black	5-20R		
TR63BLU	20	125	Blue	5-20R		
TR63GRY	20	125	Gray	5-20R		
TR63I	20	125	Ivory	5-20R		
TR63LA	20	125	Light Almond	5-20R		
TR63OR	20	125	Orange	5-20R		
TR63RED	20	125	Red	5-20R		
TR63W	20	125	White	5-20R		

Vertical Markets

- Industrial
- Education
- Multiple Dwelling
- Health Care
- Institutional

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.



Legrand, North America
60 Woodlawn Street
West Hartford, CT 06110
877-295-3472
www.legrand.us

Canada
844-977-3783
www.legrand.ca

FOLLOW US

