



**PlugTail®. The fastest, most consistent and reliable wiring devices – ever.**

PT5262A, PT5362A

Factory-terminated wiring devices are what you get with PlugTail wiring devices. Wiring devices are terminated the same no matter what the skill level. The UL-Listed connectors are keyed to ensure proper wiring installation into each extra heavy-duty receptacle. Just snap the connector into the back of the device — no fussing with wires, stripping, or tightening screws. PlugTail devices are finger safe with no exposed terminals, so taping is not required.

**Features & Benefits**

**Auto-ground clip** assures positive ground.

**Built-in connector** features large brass terminal blades to ensure consistent, reliable electrical connections.


**Large brass contacts** snugly terminate on device blade terminals. Audible snapping latch assures connection, allows release.

**Exclusive patented feature, circuit label on face** allows permanent circuit identification.


**.036 inch thick, brass, triple-wipe power contacts** for lasting retention.

**Two drive screws anchor strap** to back body and face.

**Strap tabs wrap around and lock down on face** to prevent strap from separating from face and back body.

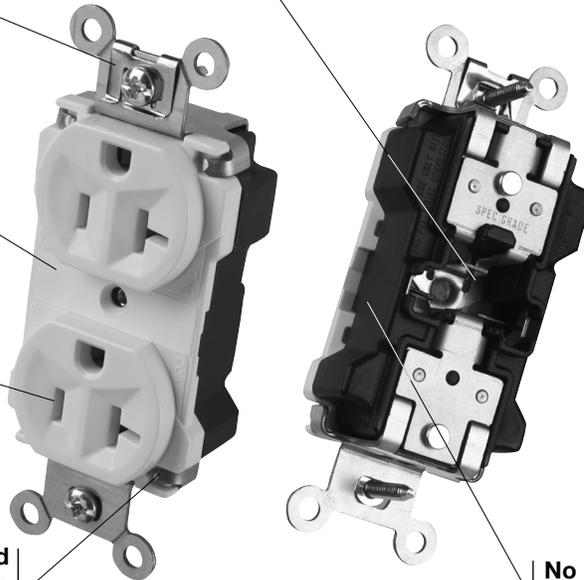

PT5362AW

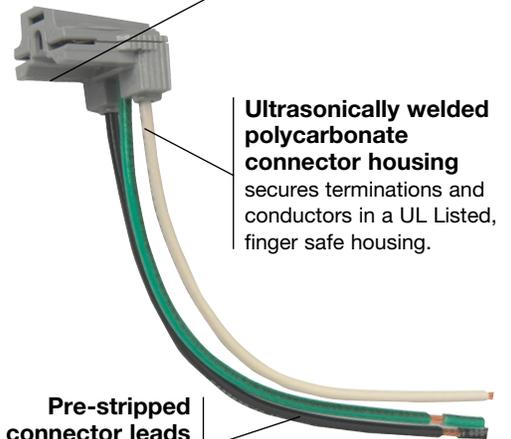

**Ultrasonically welded polycarbonate connector housing** secures terminations and conductors in a UL Listed, finger safe housing.

**Pre-stripped connector leads** fasten to conductors, easier than standard pigtails.

**No exposed terminals** before, during, or after installation increases safety at all phases of product life.

**3rd Party Compliance**

 cULus Listed, File Number E140596, Standard UL498. Federal Specification WC596.

## Technical Information

### Performance

#### Electrical

Dielectric Voltage	Withstands 2000V Minimum
Maximum Working Voltage	125V
Current Interrupting	Certified for current interrupting at full-rated current (receptacle only)
Temperature Rise	Maximum 30°C temperature at full-rated current after 50 cycles of overload at 150% of rated current with direct current

#### Mechanical

PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only
Production Identification	Ratings are a permanent part of the device

#### Environmental

Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

### PlugTail® Receptacle Materials

Face	Nylon
Back Body	Nylon
Line Contacts	.036 688 Brass
Mounting Strap	.050 260 Brass
Integral Ground System	.036 260 Brass
Assembly Drive Screw	Zinc-Plated Steel
Auto-Ground Clip	Brass
Mounting Screw	Tri-Drive Steel

### PlugTail® Connector Materials

Housing	Polycarbonate
Contacts	.036 688 Brass

### Warranty


1 Year




NEMA  
5-15R



NEMA  
5-20R

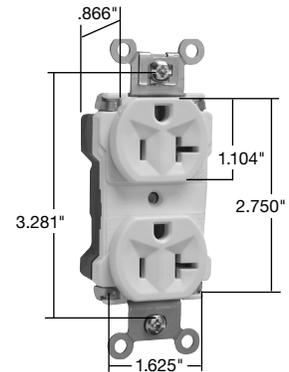

**Dimensions for  
15 & 20 Amp**

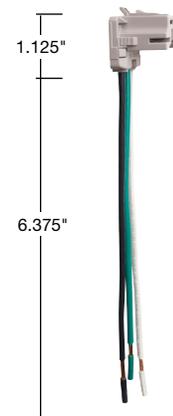

**PTRA6STR**

## Ordering Information

### Duplex Receptacles

Catalog Number	Rating		Color	NEMA Config. No.
	A	VAC		
PT5262AI	15	125	Ivory	5-15R
PT5262AW	15	125	White	5-15R
PT5262A	15	125	Brown	5-15R
PT5262AGRY	15	125	Gray	5-15R
PT5262ABK	15	125	Black	5-15R
PT5262ABL	15	125	Blue	5-15R
PT5262ARED	15	125	Red	5-15R
PT5262ALA	15	125	Light Almond	5-15R
PT5362AI	20	125	Ivory	5-20R
PT5362AW	20	125	White	5-20R
PT5362A	20	125	Brown	5-20R
PT5362AGRY	20	125	Gray	5-20R
PT5362ABK	20	125	Black	5-20R
PT5362ABL	20	125	Blue	5-20R
PT5362ARED	20	125	Red	5-20R
PT5362ALA	20	125	Light Almond	5-20R

### PlugTail Connectors — Right Angle

Catalog Number	Wire Type	Wire Length
PTRA6STR	Stranded	6"
PTRA6SOL	Solid	6"

---

## Vertical Markets

- Education
- Institutional
- Retail
- Office
- Hospitality/Lodging
- Multiple Dwelling

---

## Also available

- Hospital Grade Devices
- Surge Protected & Isolated Ground Devices
- Ground Continuity Monitoring (GCM)
- Straight Blade Plugs & Connectors
- Turnlok® Locking Devices
- Plug Load Devices
- Weatherproof Boxes & Covers
- IEC 309 Industrial Products
- Flexcor® Wire Mesh Grips
- USB Charging Devices

---

 The paper used to print this document is an environmentally responsible paper with 10% post consumer waste, with FSC and SFI Chain of Custody certifications, Lacey Act compliant. 100% of the electricity used to manufacture Flo sheets is generated with Green-e certified renewable energy.

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.



**Legrand, North America**  
60 Woodlawn Street  
West Hartford, CT 06110  
1.877.BY.LEGRAND (295.3472)  
[www.legrand.us](http://www.legrand.us)  
9024 Keele Street  
Concord, ON L4K 2N2  
905.738.9195  
[www.legrand.ca](http://www.legrand.ca)

FOLLOW US

