



PASS & SEYMOUR® Power Indicating Hospital Grade Receptacles


TR8200HPI, TR8300HPI
TR8200PI, TR8300PI; PTTR8200PI, PTTR8300PI
TR26262HGPI, TR26362HGPI

Power indication where you need it most.

Safety has long been a top concern of healthcare facilities. Visual assurance of an energized receptacle helps to maintain the high standard of care for patients who need it most. Pass & Seymour Power Indicating Hospital Grade Receptacles have two green LEDs that offer clear visual assurance of power indication at the receptacle – even with critical equipment plugged into the device. The LEDs operate independently from one another to accommodate split-circuit wiring installations. Tamper-resistant protection comes standard with the product to further enhance safety. These receptacles are built for the harshest medical environments and feature a wide body design, heavy-gauge mounting strap, and one-piece, triple-wipe, nickel-plated brass contacts. They are available in PlugTail® and standard back- and side-wire terminations, as well as decorator and standard duplex styles.



FEATURES & BENEFITS

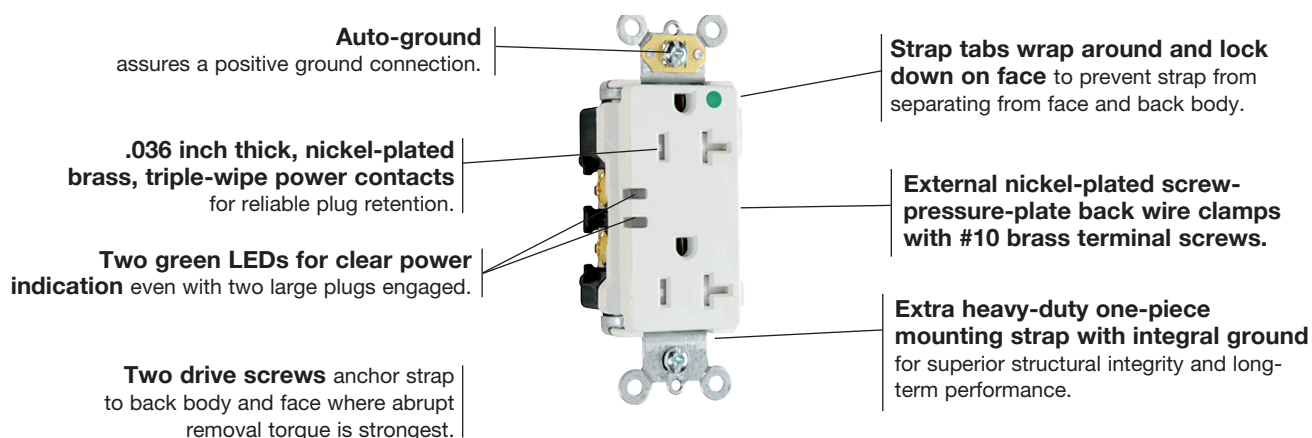

TR26362HGPIW

FIELD USES/VERTICAL MARKETS

■ Health Care ■ Education ■ Institutional ■ OEM

SF20179 — June 2015 — For latest specs visit www.legrand.us/passandseymour



PASS & SEYMOUR®

Power Indicating Hospital Grade Receptacles

ORDERING INFORMATION

Catalog #	Ratings	Color	NEMA Config.
Heavy-Duty Back & Side Wire Duplex Receptacles			
TR8200HPI	15A 125V	Brown	5-15R
TR8200HPIW	15A 125V	White	5-15R
TR8200HPILA	15A 125V	Light Almond	5-15R
TR8200HPHII	15A 125V	Ivory	5-15R
TR8200HPIRED	15A 125V	Red	5-15R
TR8200HPIGRY	15A 125V	Grey	5-15R
TR8300HPI	20A 125V	Brown	5-20R
TR8300HPIW	20A 125V	White	5-20R
TR8300HPILA	20A 125V	Light Almond	5-20R
TR8300HPHII	20A 125V	Ivory	5-20R
TR8300HPIRED	20A 125V	Red	5-20R
TR8300HPIGRY	20A 125V	Grey	5-20R
Heavy-Duty Decorator Back & Side Wire Duplex Receptacles			
TR26262HGPI	15A 125V	Brown	5-15R
TR26262HGPIW	15A 125V	White	5-15R
TR26262HGPIILA	15A 125V	Light Almond	5-15R
TR26262HGPHII	15A 125V	Ivory	5-15R
TR26262HGPIRED	15A 125V	Red	5-15R
TR26262HGPIGRY	15A 125V	Grey	5-15R
TR26362HGPI	20A 125V	Brown	5-20R
TR26362HGPIW	20A 125V	White	5-20R
TR26362HGPIILA	20A 125V	Light Almond	5-20R
TR26362HGPHII	20A 125V	Ivory	5-20R
TR26362HGPIRED	20A 125V	Red	5-20R
TR26362HGPIGRY	20A 125V	Grey	5-20R

Catalog #	Ratings	Color	NEMA Config.
Extra Heavy-Duty Back & Side Wire Duplex Receptacles			
TR8200PI	15A 125V	Brown	5-15R
TR8200PIW	15A 125V	White	5-15R
TR8200PILA	15A 125V	Light Almond	5-15R
TR8200PII	15A 125V	Ivory	5-15R
TR8200PIRED	15A 125V	Red	5-15R
TR8200PIGRY	15A 125V	Grey	5-15R
TR8300PI	20A 125V	Brown	5-20R
TR8300PIW	20A 125V	White	5-20R
TR8300PILA	20A 125V	Light Almond	5-20R
TR8300PII	20A 125V	Ivory	5-20R
TR8300PIRED	20A 125V	Red	5-20R
TR8300PIGRY	20A 125V	Grey	5-20R
Extra Heavy-Duty PlugTail® Duplex Receptacles			
PTTR8200PI	15A 125V	Brown	5-15R
PTTR8200PIW	15A 125V	White	5-15R
PTTR8200PILA	15A 125V	Light Almond	5-15R
PTTR8200PII	15A 125V	Ivory	5-15R
PTTR8200PIRED	15A 125V	Red	5-15R
PTTR8200PIRY	15A 125V	Grey	5-15R
PTTR8300PI	20A 125V	Brown	5-20R
PTTR8300PIW	20A 125V	White	5-20R
PTTR8300PILA	20A 125V	Light Almond	5-20R
PTTR8300PII	20A 125V	Ivory	5-20R
PTTR8300PIRED	20A 125V	Red	5-20R
PTTR8300PIGRY	20A 125V	Grey	5-20R

For more information on these and other P&S products refer to our Catalog or visit our web site.

PASS & SEYMOUR®

Power Indicating Hospital Grade Receptacles



TECHNICAL SPECIFICATIONS

3rd Party Compliance

UL listed, File Number E140596, Standard UL498
Federal Specification WC596, Hospital Grade
CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42

Performance

Electrical

Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	125V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Max 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

Mechanical


Terminal Identification	In accordance with UL498 (Brass, White, Green)
Terminal Accommodation	#14 AWG - #10 AWG copper conductor only
Product Identification	Ratings are permanent part of the device

Environmental


Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

Material Specs


Face: Nylon
Back Body: Nylon
Line Contacts: .036" Nickel-plated brass
Mounting Strap: .05" Brass (Extra Heavy Duty models); .05" Steel (Heavy Duty models)
Ground Contacts: Integral .05" Brass (Extra Heavy Duty models); Integral .05" Steel (Heavy Duty models)
Pressure Plate: .03" Nickel-plated brass
Terminal Screws: #10 Tri-Drive Brass (Neutral = Nickel-plated Steel)
Ground Screw: #10 Hex Tri-Drive Brass
Assembly Drive Screw: Zinc-Plated Steel
Auto-Ground Clip: Brass
Mounting Screws: Tri-Drive Steel
Illumination: Green LEDs

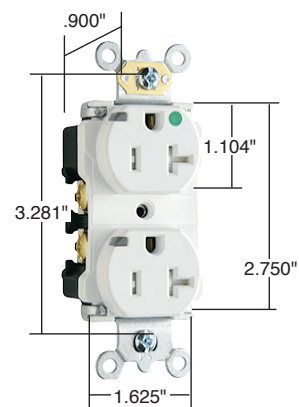

**Dimensions for
TR8200PI, TR8300PI,
TR8200HPI, TR8300HPI**

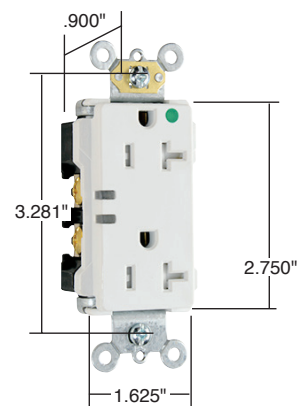

**Dimensions for
TR26262HGPI, TR26362HGPI**

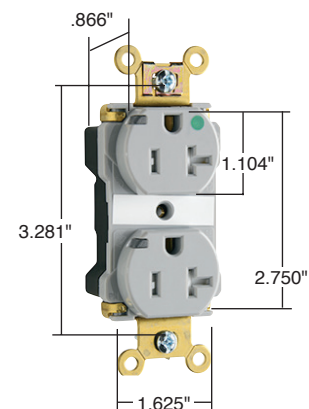

**Dimensions for
PTTR8200PI, PTTR8300PI**

ALSO AVAILABLE...

- | | | | |
|---|--|----------------------------------|-------------------------------|
| ■ Hospital Grade Devices | ■ Straight Blade
Plugs & Connectors | ■ Weatherproof
Boxes & Covers | ■ Flexcor® Wire
Mesh Grips |
| ■ TVSS & Isolated
Ground Devices | ■ Turnlok®
Locking Devices | ■ IEC 309
Industrial Products | ■ Bulk Solutions |
| ■ Ground Continuity
Monitoring (GCM) | | | |



Electrical Wiring Systems

P.O. Box 4822
Syracuse, NY 13221-4822
Phone: 1.800.776.4035
www.legrand.us/passandseymour

570 Applewood Crescent
Vaughan, Ontario L4K 4B4
Phone: 905.738.9195
www.legrand.ca