



Made in USA



# PHOENIX

## SUPPORT SYSTEMS


# Utility Pole Brackets

## Versatile Solutions for the Support of Conduit


### PB1

Extended Riser Bracket

- With  $1\frac{3}{16}$ " Strut Back-to-Back
- Standard Finish - Hot Dipped Galvanized
- Conduit can be clamped on 2 sides and in Multiple positions
- Can also be supplied in 304 or 316 stainless steel upon request
- One piece design allows for ease of installation (lag screws not supplied)
- 100% Manufactured in the USA

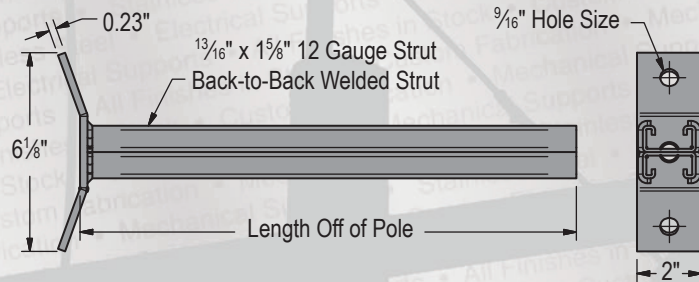



| Catalog Number | Length Off of Pole |
|----------------|--------------------|
| PB1 1200HD     | 12"                |
| PB1 1800HD     | 18"                |
| PB1 2400HD     | 24"                |
| PB1 3600HD     | 36"                |

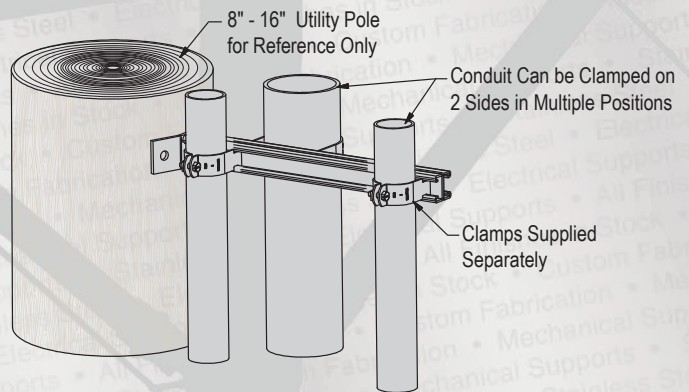

### PB5

Standoff Riser Bracket

- With  $1\frac{3}{16}$ " Strut Back-to-Back & 18" long,  $1\frac{5}{8}$ " x  $1\frac{5}{8}$ " 12 Gauge Strut Welded to End
- Standard Finish - Hot Dipped Galvanized
- Conduit can be clamped on 3 sides and in Multiple positions
- Can also be supplied in 304 or 316 stainless steel upon request
- One piece design allows for easy installation (lag screws not supplied)
- 100% Manufactured in the USA

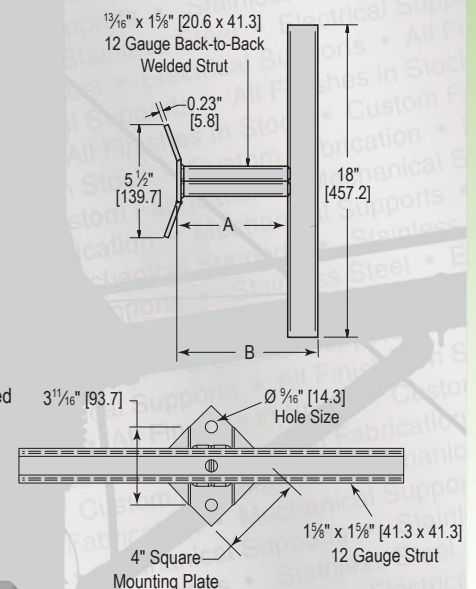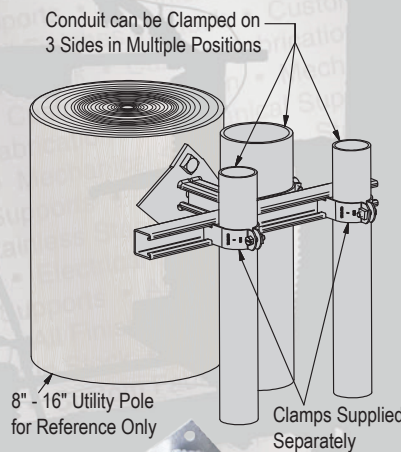

| Catalog Number | A in | B in               |
|----------------|------|--------------------|
| PB5 0618HD     | 6"   | 7 $\frac{5}{8}$ "  |
| PB5 0918HD     | 9"   | 10 $\frac{5}{8}$ " |



See Series of Recommended Strut Clamps for Installation on Reverse Side



# PHOENIX

## SUPPORT SYSTEMS

### SCR

Rigid Strut Clamp

| Catalog Number | Pipe Size |     | O.D.  |       | Design Load |      | Wt. lbs |
|----------------|-----------|-----|-------|-------|-------------|------|---------|
|                | in        | mm  | in    | mm    | lbs         | kN   |         |
| SCR0050S4      | ½         | 15  | 0.840 | 21.3  | 400         | 1.78 | 0.10    |
| SCR0075S4      | ¾         | 20  | 1.050 | 26.7  | 600         | 2.67 | 0.13    |
| SCR0100S4      | 1         | 25  | 1.315 | 33.4  | 600         | 2.67 | 0.15    |
| SCR0125S4      | 1¼        | 32  | 1.660 | 42.2  | 600         | 2.67 | 0.17    |
| SCR0150S4      | 1½        | 40  | 1.900 | 48.3  | 800         | 3.56 | 0.29    |
| SCR0200S4      | 2         | 50  | 2.375 | 60.3  | 800         | 3.56 | 0.33    |
| SCR0250S4      | 2½        | 65  | 2.875 | 73.0  | 800         | 3.56 | 0.39    |
| SCR0300S4      | 3         | 80  | 3.500 | 88.9  | 800         | 3.56 | 0.43    |
| SCR0350S4      | 3½        | 90  | 4.000 | 101.6 | 1000        | 4.45 | 0.57    |
| SCR0400S4      | 4         | 100 | 4.500 | 114.3 | 1000        | 4.45 | 0.62    |
| SCR0500S4      | 5         | 125 | 5.562 | 141.3 | 1000        | 4.45 | 0.73    |
| SCR0600S4      | 6         | 150 | 6.625 | 168.3 | 1000        | 4.45 | 0.85    |

Pipe / Conduit clamps available in 304 stainless, 316 stainless, hot dipped galvanized or aluminum as shown below




Stainless Steel  
(S4 or S6)





Hot-Dipped  
Galvanized (HD)



Aluminum (AL)

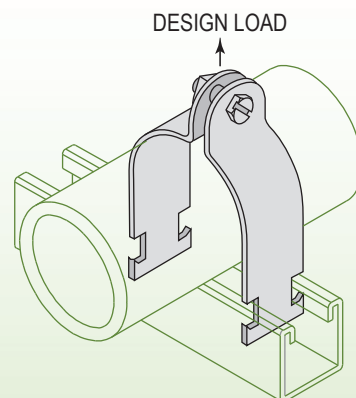

Conduit can be Clamped on  
3 Sides in Multiple Positions

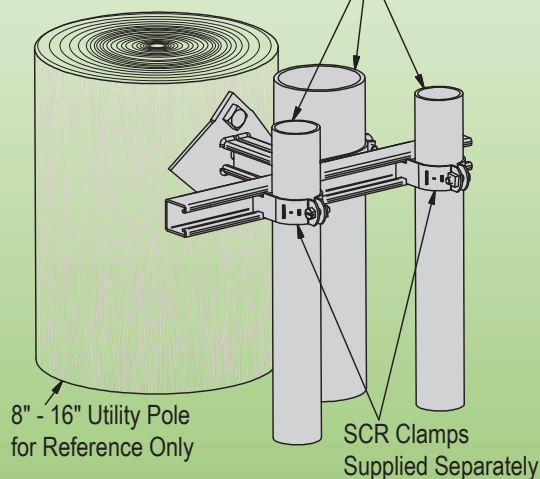

Phoenix Support Systems  
931 Summit Avenue  
Niles, Ohio 44446, USA  
Fax: 330-505-9959

Tel: 800-721-0404  
www.phoenixsupports.com