

HVAC120-EMERGENCY HVAC SHUT-DOW

Pilla Electrical Products, Inc.



DESCRIPTION:

Maintained, push-pull mushroom operator, 40mm dia. red, with engraved white lettering:

"PULL TO RESET"

Bold luminous legends.


External mounting feet top & bottom.

NEMA 4, 4X, 12.

Contact block capacity:

for standard depth 1-3 per station,

for XD version 6 per station.

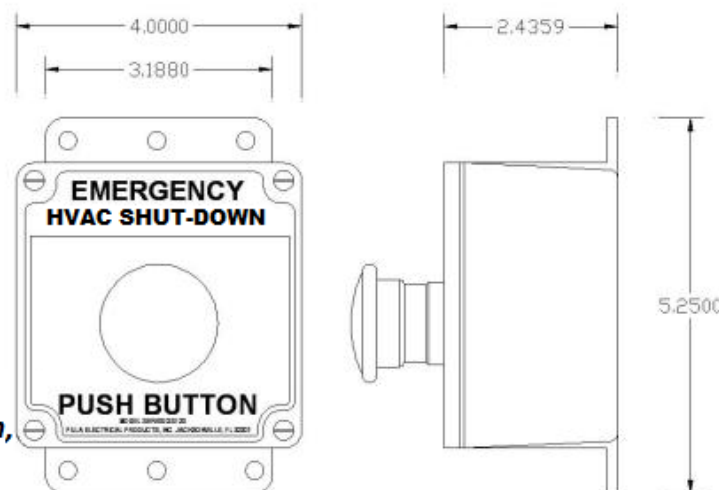

HVAC120IL



HVAC120CLM



HVAC120RP



PILNOCB

PILNCCB

RATED OPERATIONAL CHARACTERISTICS CONFORMING TO EC/EN 60947-5-1

AC SUPPLY:
UTILIZATION CATEGORY AC-15

DC SUPPLY:
UTILIZATION CATEGORY DC-13

STANDARD BLOCKS (SINGLE OR DOUBLE) WITH SCREW CLAMP TERMINALS:
A600: $U_e=600V_{ac}$ AND $I_e=1.2 A$ OR $U_e=240 V_{ac}$ AND $I_e= 3 A$
OR $U_e = 120 V_{ac}$ AND $I_e = 6 A$
CONTINUOUS THERMAL CURRENT 10 A

STANDARD SINGLE OR DOUBLE BLOCKS WITH SCREW CLAMP TERMINALS:
Q600: $U_e= 600V_{dc}$ AND $I_e = 0.1 A$

24 Vdc

0.5 A