



Color: Bronze

Weight: 9.5 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Type	Constant
120V	0.50A
208V	0.29A
240V	0.25A
277V	0.22A
Input Watts	29.3-61W

LED Info

Watts	60/50/40/30W
Color Temp	3000/4000/5000K
Color Accuracy	82-85 CRI
L70 Lifespan	100,000 Hours
Lumens	3,727-9,105 lm
Efficacy	117.1-161.5 lm/W

Technical Specifications**Field Adjustability****Cutoff Adjustability:**

45°, 30°, 15° and 0° (factory default 45°)

Field Adjustable:

Field Adjustable Light Output:
60W/50W/40W/30W (factory default 60W)
Color temperature selectable 3000K, 4000K and 5000K (factory default 4000K)

Compliance**UL Listed:**

Suitable for wet locations

DLC Listed:

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: S-TFCRVC

Electrical**Driver:**

Constant Current, Class 1, 120-277V, 50/60 Hz:
60W: 120V: 0.50A, 208V: 0.29A, 240V: 0.25A, 277V: 0.22A
50W: 120V: 0.41A, 208V: 0.24A, 240V: 0.21A, 277V: 0.19
40W: 120V: 0.34A, 208V: 0.20A, 240V: 0.18A, 277V: 0.15A
30W: 120V: 0.25A, 208V: 0.15A, 240V: 0.13A, 277V: 0.11A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

Photocell:

Integrated photocell included with on/off switch

Surge Protection:

DM 4KV+ CM 6KV

Performance**Lifespan:**

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Performance Data:

[Click here for the W22-M-60 performance data](#)

Wattage Equivalency:

60W: Replaces up to 250W Metal Halide (MH) or 200W High Pressure Sodium (HPS)
50W: Replaces up to 250W Metal Halide (MH) or 200W High Pressure Sodium (HPS)
40W: Replaces up to 175W Metal Halide (MH) or 150W High Pressure Sodium (HPS)
30W: Replaces up to 150W Metal Halide (MH) or 100W High Pressure Sodium (HPS)

LED Characteristics**LEDs:**

Long-life, high-efficacy, surface-mount LEDs

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Construction**Housing:**

Die-cast aluminum

Lens:

Glass

Reflector:

Aluminum

Technical Specifications (continued)**Cold Weather Starting:**

The minimum starting temperature is -40°C (-40°F)

Maximum Ambient Temperature:

Suitable for use in up to 40°C (104°F)

Green Technology:

Mercury and UV free. RoHS-compliant components.

Finish:

Formulated for high durability and long-lasting color

Installation**Mounting:**

Surface mount for recessed junction box; 3 conduit entry points

Optical**BUG Rating:**

60W: B2 U4 G5

50W: B2 U4 G4

40W: B1 U3 G4

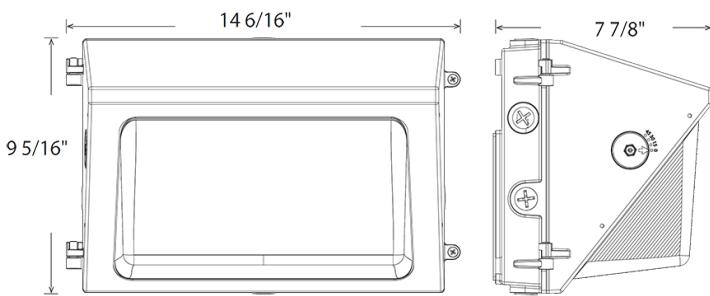
30W: B1 U3 G3

Other**5 Yr Limited Warranty:**

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions**Features**

100,000-Hour LED lifespan
0-10V dimming standard
5-Year, limited warranty

Ordering Matrix

Family	Housing Size	Wattage	Color Temp	Finish	Forward Throw	Driver	Options
W22	M	60					
S = Small	30 = 30/25/20/15W		Blank = 3000/4000/5000K			Blank =	
M = Medium	60 = 60/50/40/30W		Adjustable	Blank =	Adjustable Throw	120-277V	Blank = Selectable Photocell
L = Large	100 = 100/85/70/50W			Bronze	0°/15°/30°/45°	/480 = 480V	/E = Selectable Photocell w/Battery Backup
	150 = 150/125/100/75W			W = White			