SIEMENS

Item: HR21A, HR22A

For use with: 30 OR 60 AMP GENERAL DUTY, VBII SAFETY SWITCH, SERIES "A"

R Fuse Kit


Installation Instructions




Use only with Siemens certified components.

NOTE - These instructions do not purport to cover all details or variations in equipment, or to provide for every possible contingency to be met in connection with installation, operation or maintenance. Should further information be desired or should particular problems arise, which are not covered sufficiently for the purchaser's purposes, the matter should be referred to the local Siemens sales office. The contents of this instruction manual shall not become part of or modify any prior or existing agreement, commitment or relationship. The sales contract contains the entire obligation of Siemens. The warranty contained in the contract between the parties is the sole warranty of Siemens. Any statements contained herein do not create new warranties or modify the existing warranty.

TRADEMARKS - Unless otherwise noted, all names identified by ® are registered trademarks of Siemens AG or Siemens Industry, Inc. The remaining trademarks in this publication may be trademarks whose use by third parties for their own purposes could violate the rights of the owner.



Catalog No.: HR21A 30A 240V




Catalog No.: HR22A 60A 240V





- 1. Prepare safety switch for R Fuse Kit installation.
 - Turn OFF and lock out all power supplying this device before working on the device.
 - Turn OFF the safety switch.
- 2. Remove and discard factory installed, load side fuse clips.

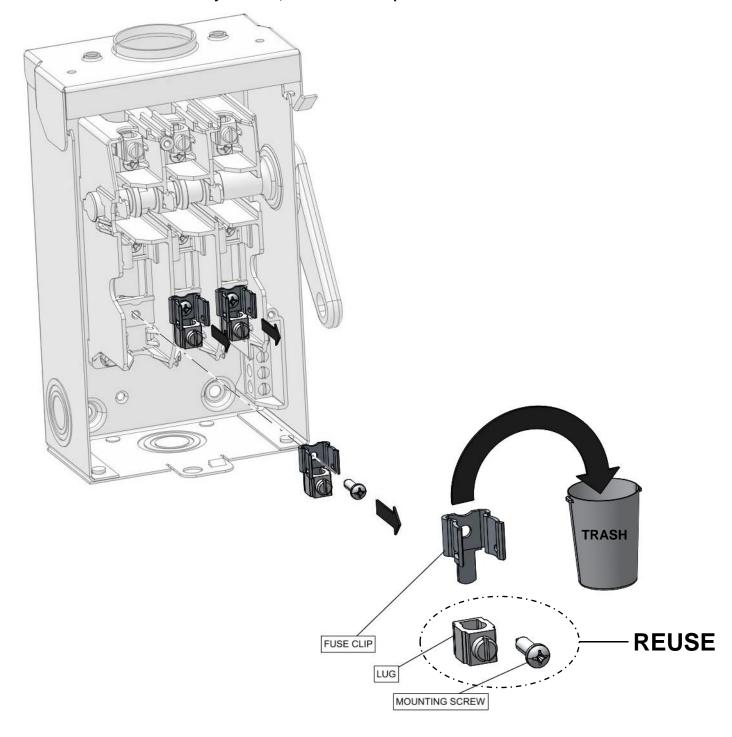



3. Install new fuse clip assemblies from kit.

