

Features

- 30A Max. Fusible PullOut Switch
- Type 3R Outdoor Enclosure




Short Circuit Current Rating
This switch is suitable for use on a circuit capable of delivering not more than 10,000 Amps RMS symmetrical, 240V AC Max.

Ratings

30 AMP, 240V AC	HP RATINGS	STD.	MAX.*
1 PHASE, 3 WIRE 2 POLE	120V AC	.5	2
	240V AC	1.5	3

*The starting current of motors of more than the standard horsepower ratings may require the use of fuses with appropriate time-delay characteristics. Continuous load current not to exceed 80 percent of the rating of the fuses employed in other than motor circuits.


Schematic

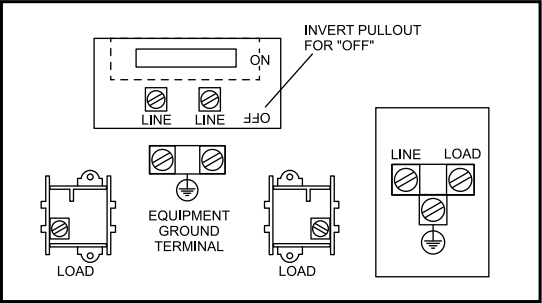


Connectors, Wire Sizes and Torques

USE 60°/75°C COPPER OR ALUMINUM WIRE		
TERMINALS	WIRE SIZE (AWG)	TORQUE (IN-LBS)
LINE, LOAD	14-10	35
	8-6	45
	4-2	50
EQUIP. GROUND	14-10 8	25 40




Pullout

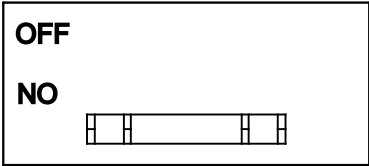


Shield

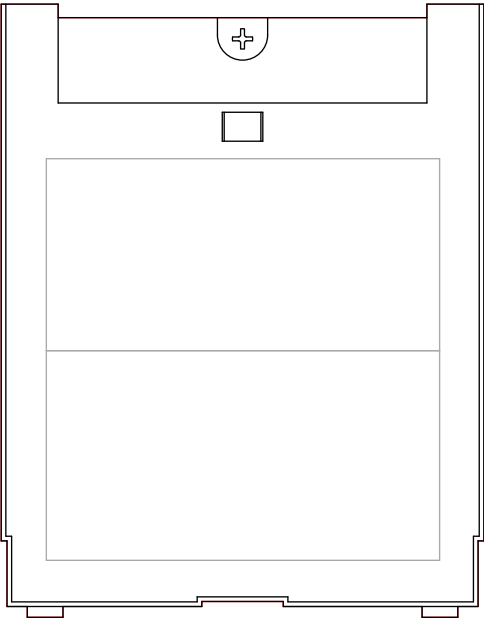

View Shown With Shield Removed

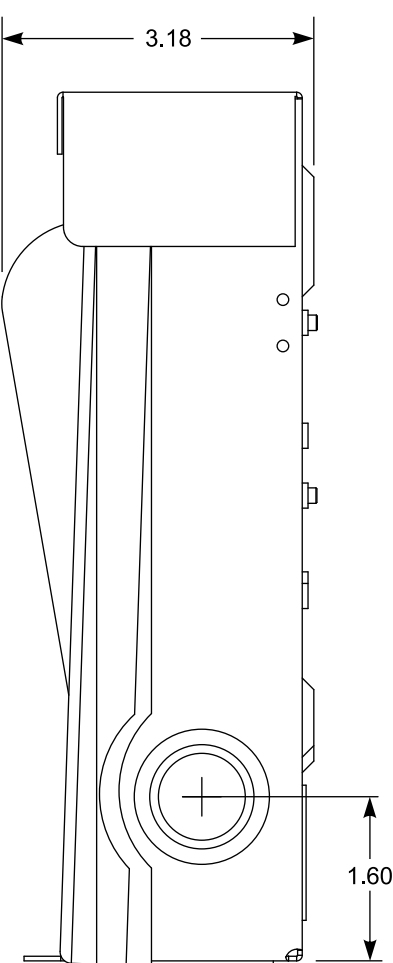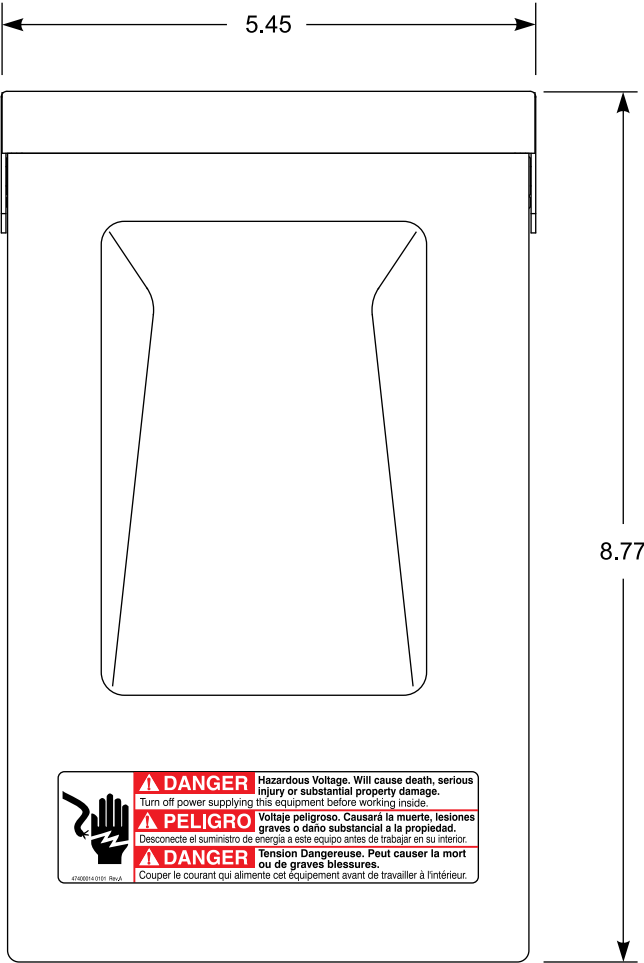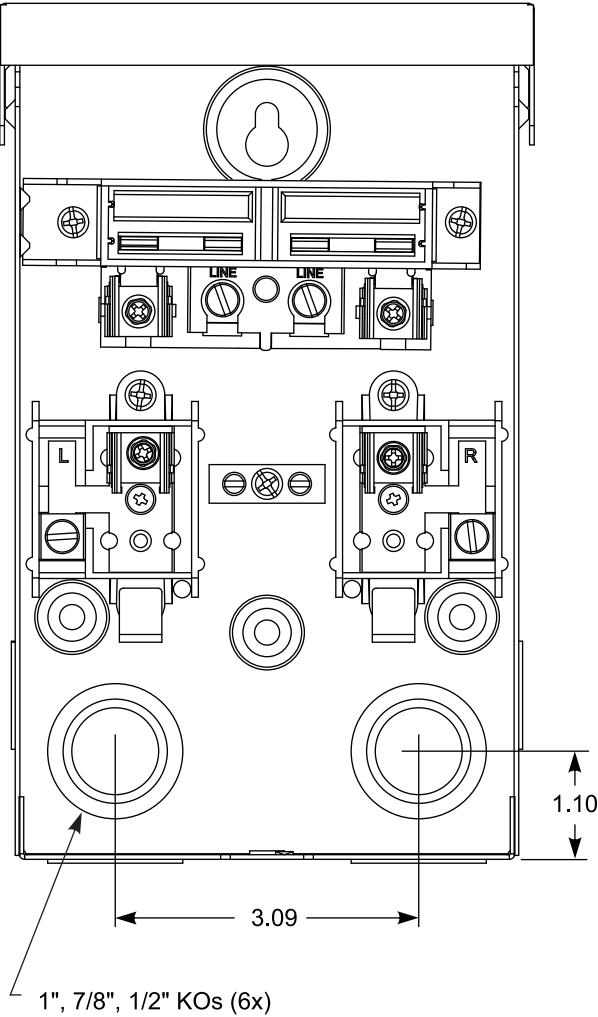

Catalog Number WFC2030

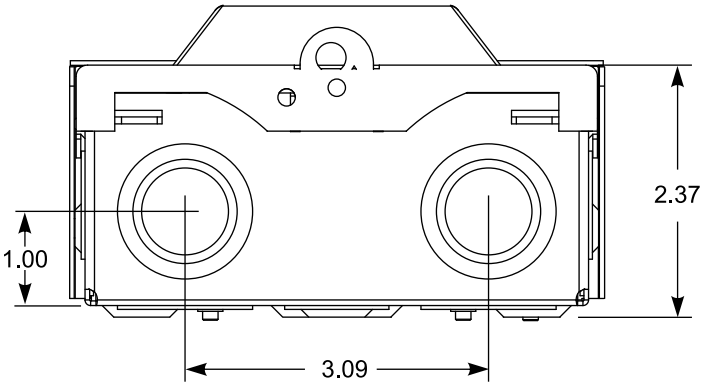

© 2022 Copyright Siemens Industry, Inc.

SIEMENS Siemens Industry, Inc.		
Pullout Switch		
Description: 1 Ph, 30A, 240V, 3HP, Fused Outdoor AC Disconnect		
KAM 12/14/22	DO NOT SCALE DRAWING	Dwg No: WFC2030