

Features

- 60A Max. Non-Fused PullOut Switch
- Type 3R Outdoor Enclosure




Ratings

60 AMP, 240V AC	HP RATINGS	STD.	MAX.*
1 PHASE, 3 WIRE 2 POLE	240V AC	3	10

*The starting current of motors of more than the standard horsepower ratings may require the use of fuses with appropriate time-delay characteristics.
DOES NOT CONTAIN FUSES.


Schematic

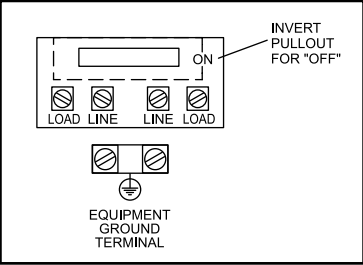


Connectors, Wire Sizes and Torques

USE 60°/75°C COPPER OR ALUMINUM WIRE		
TERMINALS	WIRE SIZE (AWG)	TORQUE (IN-LBS)
LINE, LOAD	14-10	35
	8-6	45
	4-2	50
EQUIP GROUND	14-10	25
	8	40


Pullout

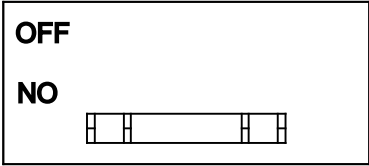




Shield

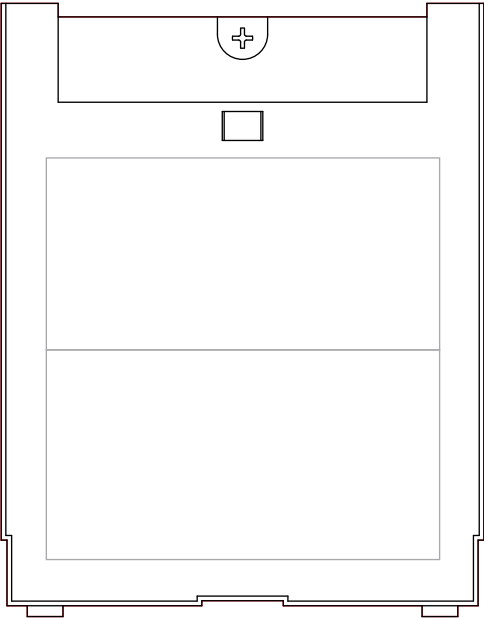

View Shown With Shield Removed

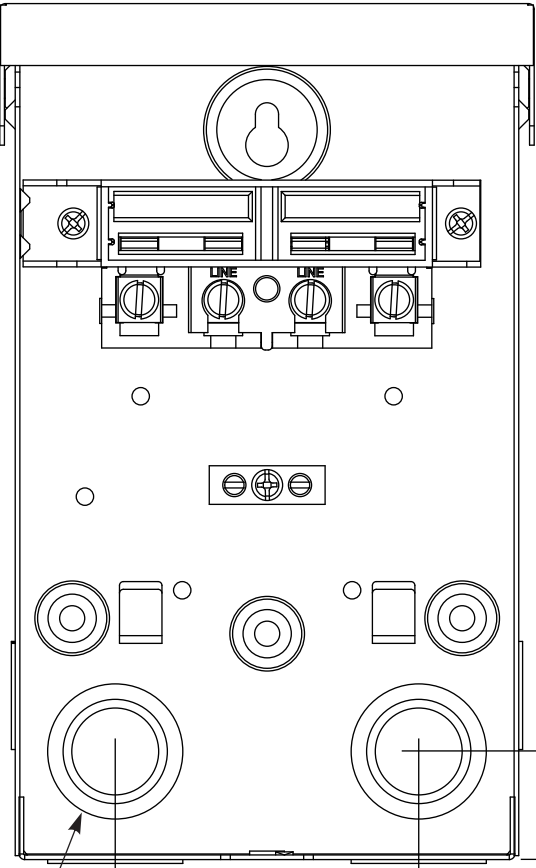

1", 7/8", 1/2" KOs (6x)

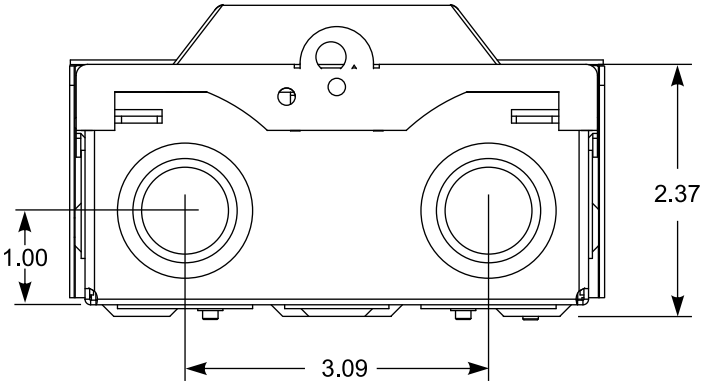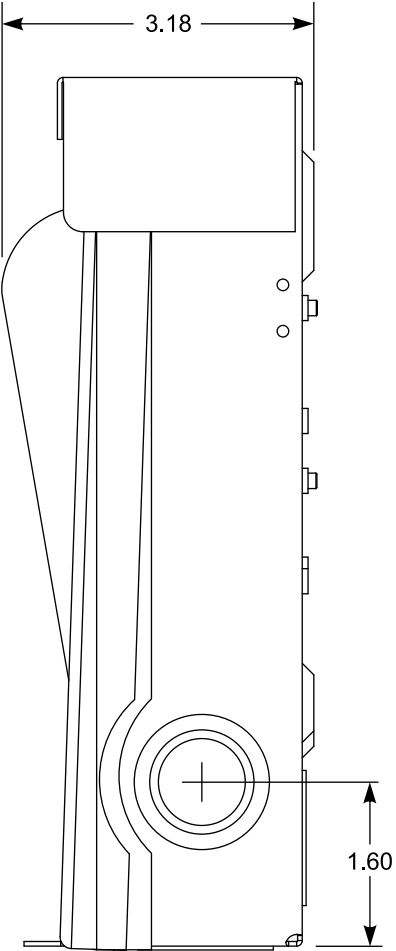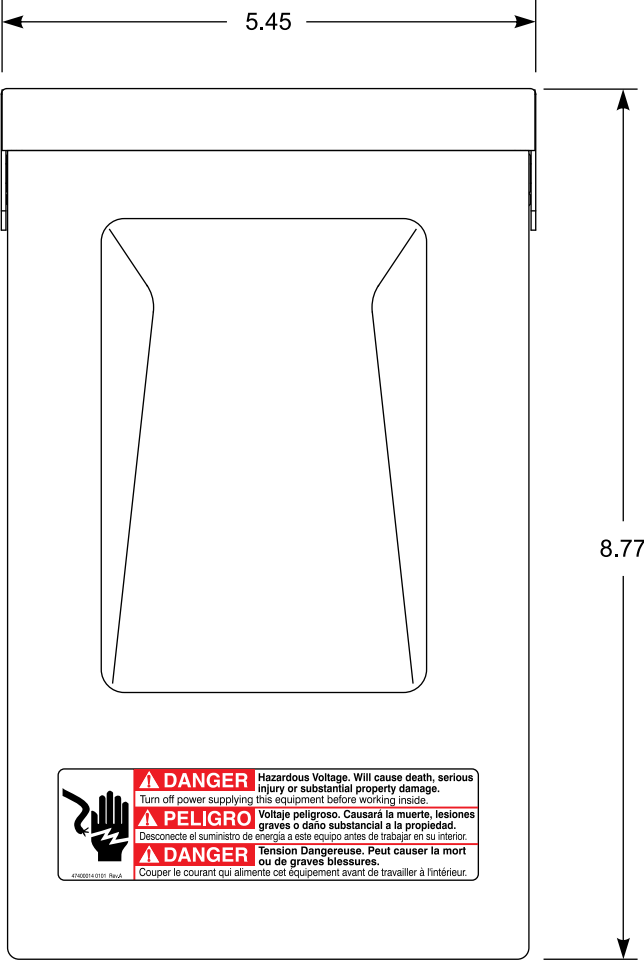

Catalog Number WNC2060

© 2022 Copyright Siemens Industry, Inc.

SIEMENS Siemens Industry, Inc.		
Pullout Switch		
Description: 1 Ph, 60A, 240V, 10HP, Non-Fused Outdoor AC Disconnect		
KAM 12/14/22	DO NOT SCALE DRAWING	Dwg No: WNC2060