


CABLE TIE MOUNTS WITH ADHESIVE

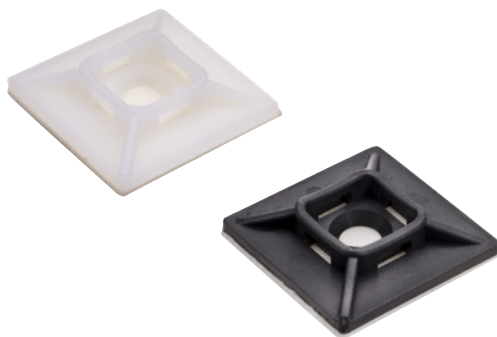

FEATURES

- Operating temperature minimum -40°F to maximum 185°F
- Apply with adhesive base or screw
- 4-way entry style

APPLICATIONS

- For safe organization of cables

STANDARD MATERIAL

- Polyamide 6.6 UV Resistant (Outdoor)
- Polyamide 6.6 (Indoor)

CERTIFICATIONS

- Plenum AH2 Rated
- Flammability rating UL 94-V2
- UL Recognized

PART #	ADHESIVE TYPE	COLOR	LENGTH	WIDTH	THICKNESS	MIN. BUNDLE DIAMETER	SCREW SIZE	BAG QTY.	CASE QTY.	WEIGHT/ CASE (LBS.)
BRMPM9-C	RUBBER	NATURAL	3/4"	3/4"	0.1875"	0.165"	0.162"	100	1,000	3.8
BRMPS9-C			1"	1"	0.198"	0.220"	0.210"	100	1,000	3.8
BRMPM0-C		UV BLACK	3/4"	3/4"	0.1875"	0.165"	0.162"	100	1,000	3.8
BRMPS0-C			1"	1"	0.198"	0.220"	0.210"	100	1,000	3.8
BRMPMA9-C	ACRYLIC	NATURAL	3/4"	3/4"	0.1875"	0.165"	0.162"	100	1,000	3.8
BRMPSA9-C			1"	1"	0.198"	0.220"	0.210"	100	1,000	3.8
BRMPMA0-C		UV BLACK	3/4"	3/4"	0.1875"	0.165"	0.162"	100	1,000	3.8
BRMPSA0-C			1"	1"	0.198"	0.220"	0.210"	100	1,000	3.8

PART #	ADHESIVE TYPE	COLOR	LENGTH	WIDTH	THICKNESS	MIN. BUNDLE DIAMETER	SCREW SIZE	BAG QTY.	CASE QTY.	WEIGHT/ CASE (LBS.)
BLMPM9-C	RUBBER	NATURAL	3/4"	3/4"	0.1875"	0.165"	0.162"	100	10,000	38
BLMPS9-C			1"	1"	0.198"	0.220"	0.210"	100	5,000	19
BLMPM0-C		UV BLACK	3/4"	3/4"	0.1875"	0.165"	0.162"	100	10,000	38
BLMPS0-C			1"	1"	0.198"	0.220"	0.210"	100	5,000	19
BLMPMA9-C	ACRYLIC	NATURAL	3/4"	3/4"	0.1875"	0.165"	0.162"	100	10,000	38
BLMPSA9-C			1"	1"	0.198"	0.220"	0.210"	100	5,000	19
BLMPMA0-C		UV BLACK	3/4"	3/4"	0.1875"	0.165"	0.162"	100	10,000	38
BLMPSA0-C			1"	1"	0.198"	0.220"	0.162"	100	5,000	19