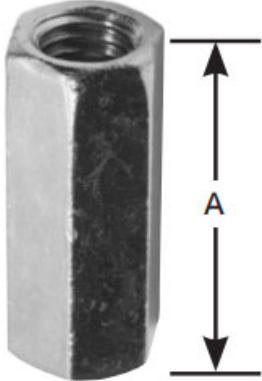


H119 Rod couplings – standard

	Rod size	A (in.)	Wt./C lb
Diagram 	$\frac{1}{4}$	$\frac{7}{8}$	1.90
	$\frac{5}{16}$	$\frac{7}{8}$	3.75
	$\frac{3}{8}$	$1\frac{1}{8}$	3.50
	$\frac{1}{2}$	$1\frac{1}{4}$	5.50
	$\frac{5}{8}$	$2\frac{1}{8}$	18.00
	$\frac{3}{4}$	$2\frac{1}{4}$	28.00
	$\frac{7}{8}$	$2\frac{1}{2}$	55.00
	1	$2\frac{1}{4}$	56.00

Standard rod coupling

Example: H119-1/2EG

Order by product number, rod size, and finish.

Available in stainless steel.

H119 Rod couplings – reducing

Rod size	A (in.)	Wt./C lb
$\frac{1}{4}$ to $\frac{3}{8}$	$1\frac{1}{2}$	3.50
$\frac{3}{8}$ to $\frac{1}{2}$	$1\frac{1}{4}$	6.70
$\frac{1}{2}$ to $\frac{5}{8}$	$1\frac{1}{4}$	14.00
$\frac{5}{8}$ to $\frac{3}{4}$	$1\frac{1}{2}$	21.00
$\frac{3}{4}$ to $\frac{7}{8}$	$1\frac{3}{4}$	40.00

Rod reducer coupling

Example: H119-1/4x3/8EG