



HOME » FLAT/ATTACHMENTS » FLASHLOC RM

FLASHLOC RM



THE STRONGEST ATTACHMENT FOR EVERY FLAT ROOF


Unirac's FLASHLOC RM is a lightweight, durable, powder-coated cast aluminum roof attachment solution that provides fast, easy installation and helps save labor cost. FLASHLOC RM is compatible with most roofing materials and is applicable for almost all solar racking form factors. Rigorous mechanical, sealing, and ease-of-install testing has been successfully completed for assurance of long-term reliability.

FLASHLOC TECHNOLOGY – NO MORE MEMBRANE SKUS OR HEAT WELDING


- Works for all roof types – see Chemlink M-1's compatibility for details
- Labor and attachment savings
- Industry-leading install time
- 6,600-lb. uplift offset (ultimate)
- Includes 8 fastener holes
- Attachment can accommodate roofing screw sizes #12 – #15

NOTES:

1. ATTACHMENT CAN ACCOMMODATE ROOFING SCREW SIZES #12 - #15. FASTENER SIZE, LENGTH, AND QUANTITY TO BE SELECTED BY STRUCTURAL ENGINEER OF RECORD WHEN DESIGNING FOR THE SPECIFIC PROJECT CONSTRUCTION AND CAPACITY.
2. REFER TO THE UNIRAC INSTALLATION GUIDE FOR PROPER USE OF CHEM LINK M1 AND ONE-PART SEALANTS FOR WATER TIGHT INSTALLATION.

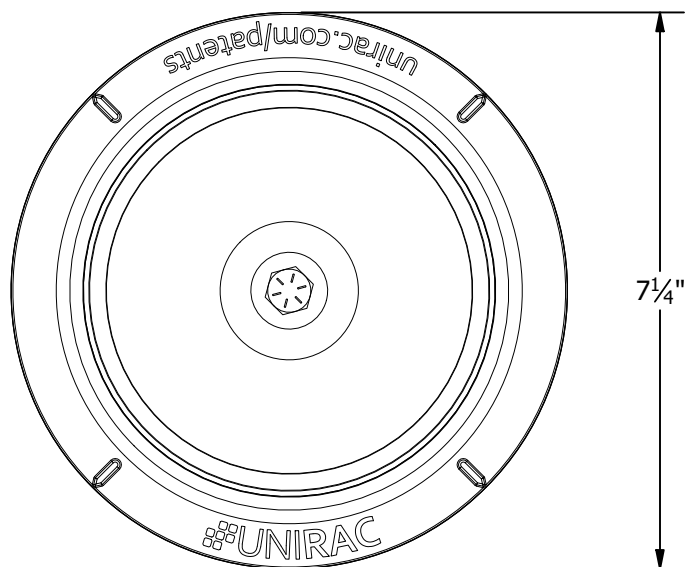


TOP VIEW

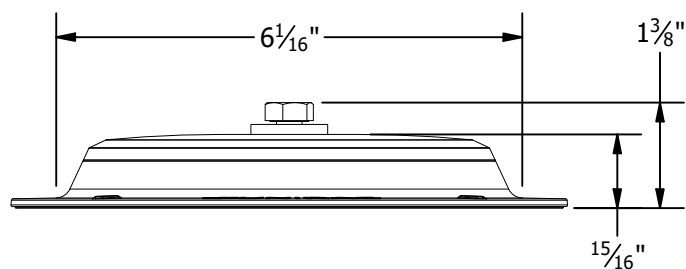

Ø 3/8" HARDWARE
(PRE-ASSEMBLED)

COVER

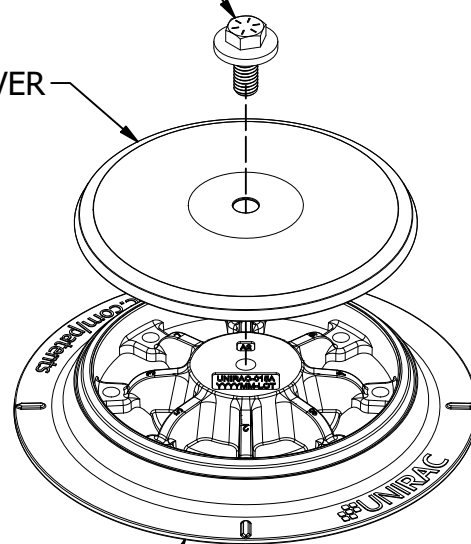

BASE

PART # TABLE	
P/N	DESCRIPTION
310999	FLASHLOC RM KIT

ULTIMATE TEST LOAD (WITH 8 ROOF FASTENERS)

UPLIFT ULTIMATE CAPACITY	6,670 lbs.
SHEAR ULTIMATE CAPACITY	5,760 lbs.



1411 BROADWAY BLVD. NE
ALBUQUERQUE, NM 87102 USA
PHONE: 505.242.6411
WWW.UNIRAC.COM

PRODUCT LINE:	RM
DRAWING TYPE:	ASSEMBLY DETAIL
DESCRIPTION:	FLASHLOC RM KIT
REVISION DATE:	6/26/2020

DRAWING NOT TO SCALE
ALL DIMENSIONS ARE
NOMINAL

PRODUCT PROTECTED BY
ONE OR MORE US PATENTS
LEGAL NOTICE

RMF-A01

SHEET