


Data Sheet | Item Number: 773-164

PUSH WIRE® connector for junction boxes; for solid and stranded conductors; max. 2.5 mm²; 4-conductor; transparent housing; orange cover; Surrounding air temperature: max 60°C; 2,50 mm²; multicoloured

<https://www.wago.com/773-164>



Color: ☐ multi-colored

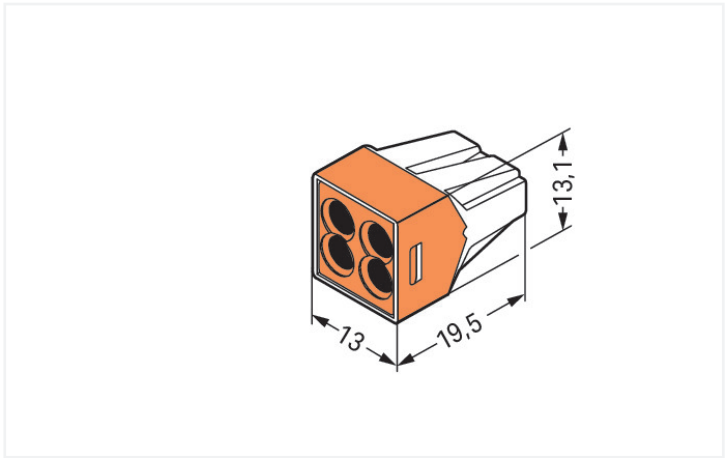

Dimensions in mm

Notes

Safety information	in grounded power lines
--------------------	-------------------------

Electrical data

Ratings per	IEC/EN 60664-1		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	-	400 V
Rated surge voltage	-	-	4 kV
Rated current	-	-	24 A

Connection data

Connection points	4
Total number of potentials	1

Connection 1	
Connection technology	PUSH WIRE®
Actuation type	Push-in
Connectable conductor materials	Copper Aluminum



Connection 1

Connectable conductor materials (note)	<p>Terminating Aluminum Conductors</p> <p>WAGO spring clamp terminal blocks are suitable for solid aluminum conductors up to 4 mm²/12 AWG if WAGO "Alu-Plus" Contact Paste 249-130 is used for termination.</p> <p>"Alu-Plus" Contact Paste Advantages:</p> <ul style="list-style-type: none">• Automatically destroys the oxide film during clamping.• Prevents fresh oxidation at the clamping point.• Prevents electrolytic corrosion between aluminum and copper conductors (in the same terminal block).• Provides long-term protection against corrosion. <p>For spring clamp connections with PUSH WIRE® connection technology, WAGO recommends that the aluminum conductor first be cleaned and then immediately inserted into the clamping unit filled with "Alu-Plus" contact paste.</p> <p>It is also possible to apply WAGO "Alu-Plus" additionally on the whole surface of the aluminum conductor before termination.</p> <p>Please note that the nominal currents must be adapted to the reduced conductivity of the aluminum conductors::</p> <p>2.5 mm² = 16 A 4 mm² = 22 A</p> <table><tr><td>Solid conductor</td><td>0.75 ... 2.5 mm² / 18 ... 12 AWG</td></tr><tr><td>Stranded conductor</td><td>1.5 ... 2.5 mm² / 16 ... 12 AWG</td></tr><tr><td>Strip length</td><td>12 mm / 0.47 inches</td></tr><tr><td>Wiring direction</td><td>Side-entry wiring</td></tr></table>	Solid conductor	0.75 ... 2.5 mm² / 18 ... 12 AWG	Stranded conductor	1.5 ... 2.5 mm² / 16 ... 12 AWG	Strip length	12 mm / 0.47 inches	Wiring direction	Side-entry wiring
Solid conductor	0.75 ... 2.5 mm² / 18 ... 12 AWG								
Stranded conductor	1.5 ... 2.5 mm² / 16 ... 12 AWG								
Strip length	12 mm / 0.47 inches								
Wiring direction	Side-entry wiring								

Physical data	
Width	13 mm / 0.512 inches
Height	13.1 mm / 0.516 inches
Depth	19.5 mm / 0.768 inches

Material data	
Note (material data)	Information on material specifications can be found here
Color	multi-colored
Cover color	orange
Flammability class per UL94	V2
Fire load	0.057 MJ
Weight	2.7 g



Environmental requirements	
Ambient temperature (operation)	+60 °C
Continuous operating temperature	105 °C

Commercial data	
Product Group	7 (Push Wire Conn.)
eCl@ss 10.0	27-14-11-04
eCl@ss 9.0	27-14-11-04
ETIM 8.0	EC000446
ETIM 7.0	EC000446
PU (SPU)	1000 (100) pcs
Packaging type	Box
Country of origin	DE
GTIN	4044918398022

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CSA DEKRA Certification B.V.	C22.2	15411 (LR46759)
UL UL International Germany GmbH	UL 486C	E69654