


Guard against harmful bacteria, all the time.

INTRODUCING STERIGUARD

With embedded antimicrobial additives for protection in food and beverage operations.

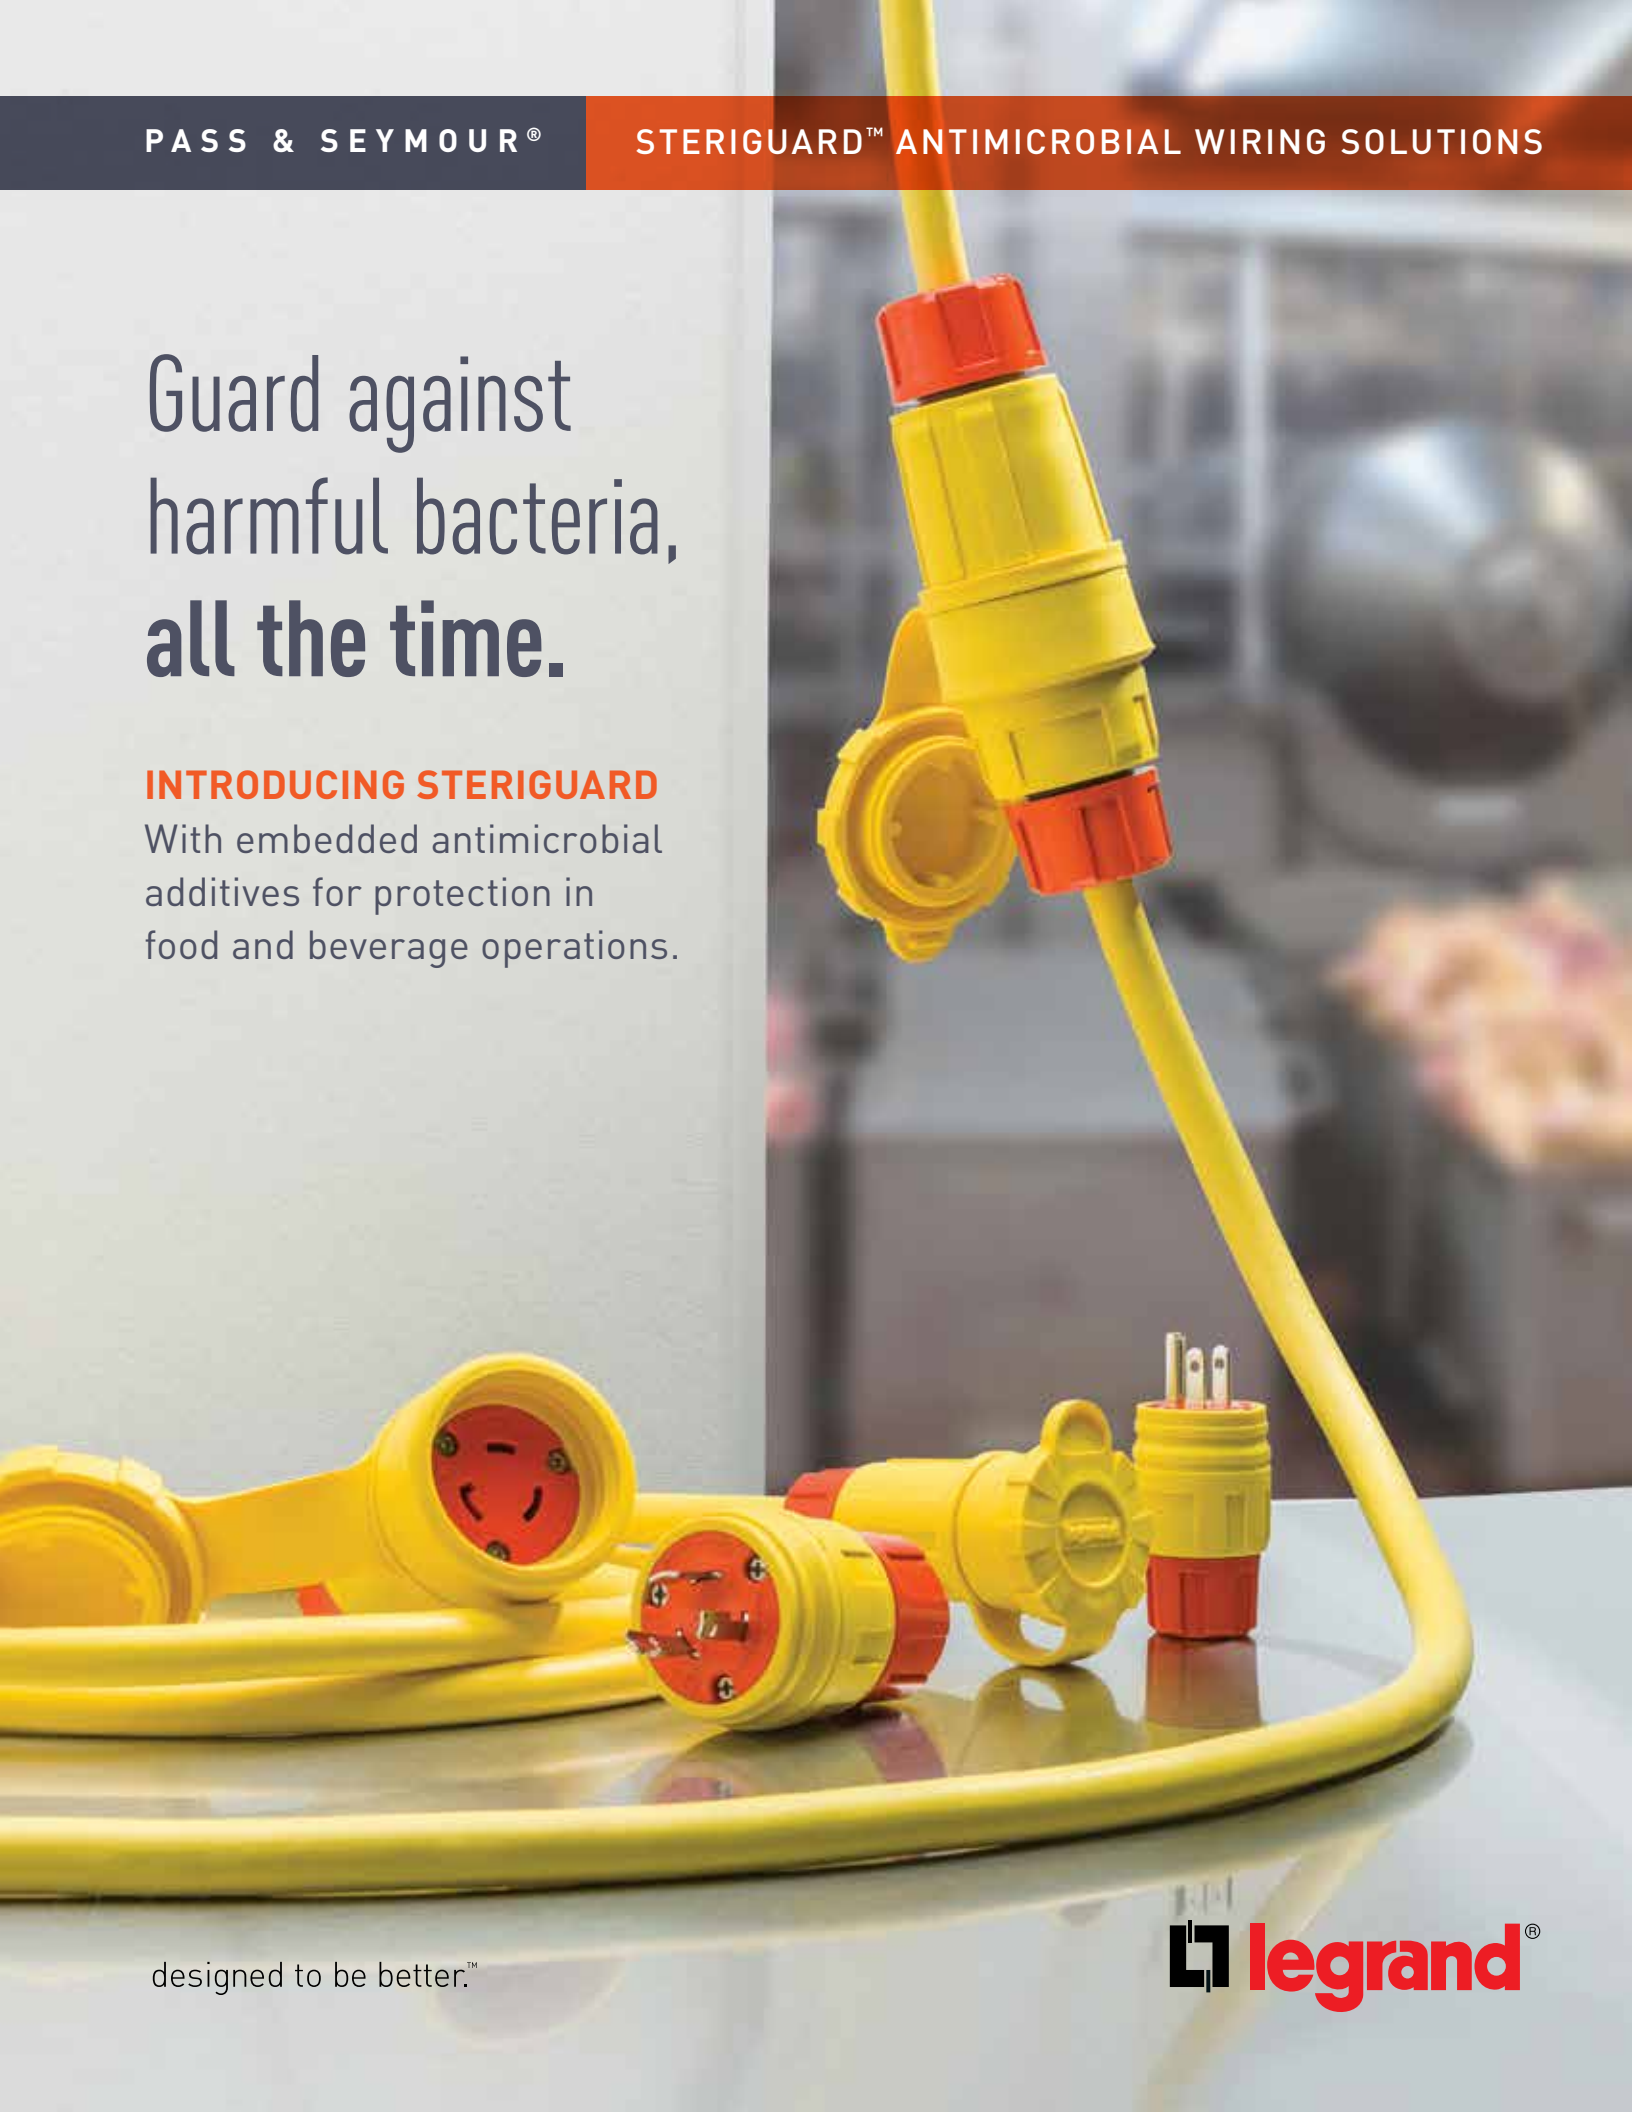

designed to be better.™

ALL INDUSTRIAL

Protect your customers, your products and
your reputation with the electrical wiring
devices that provide all-inclusive
protection for:

ALL APPLICATIONS

ALL CONDITIONS

ALL COMPONENTS


ALL THE TIME

Plugs, connectors and cord sets that help PREVENT BACTERIA AND REDUCE DOWNTIME.

Maintaining cleanliness in fast-paced food and beverage processing plants can be daunting to say the least. That's partly because mandatory safety protocols, such as chemical washdowns, are simply not enough to guarantee reliable, long-lasting antimicrobial protection for your electrical devices and equipment. The result: your facility could be harboring dangerous molds and bacteria that could pose a significant risk to public health, and your reputation. One way to reduce your risk is by installing SteriGuard™ Antimicrobial Industrial Wiring Devices.


Antimicrobial protection that goes well beyond the surface.

When it comes to reliable antimicrobial protection, SteriGuard Wiring Devices go all in—storing antimicrobial growth inhibitors directly inside the products themselves. The additives are then gradually released to the surface, providing continuous, long-lasting protection against the growth of bacteria, molds, mildews and fungi.

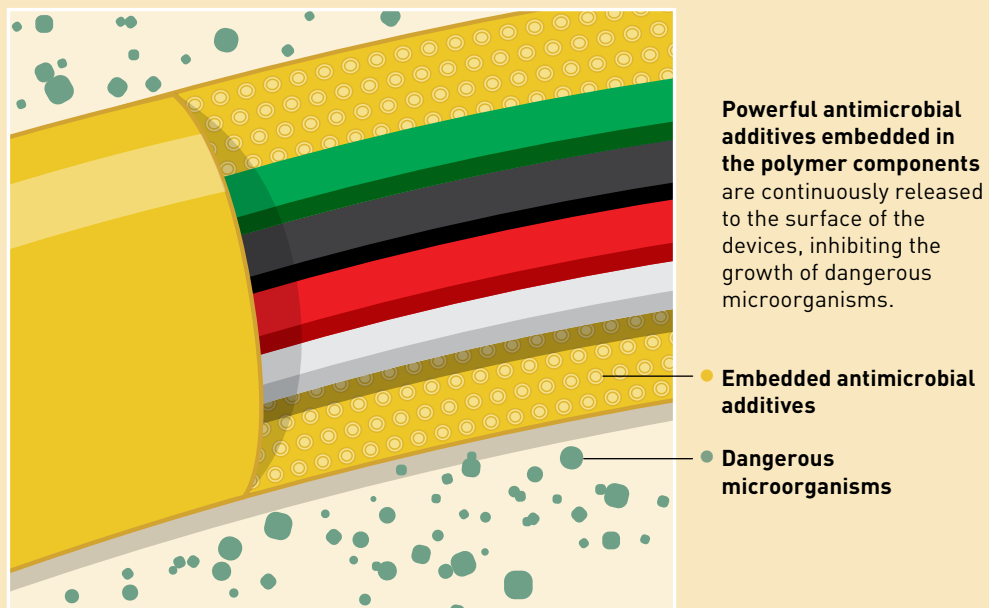

Block contamination. Tackle corrosion.

Busy food and beverage plants can be tough on your electrical wiring devices. Fortunately, SteriGuard™ products are even tougher—reducing the labor and expense of constantly replacing contaminated or corroded hardware. They also feature embedded additives that are continuously moving to the surface of the devices. That means whenever a device is nicked, scratched or cut, additives instantly replace the affected areas, ensuring uninterrupted antimicrobial protection.

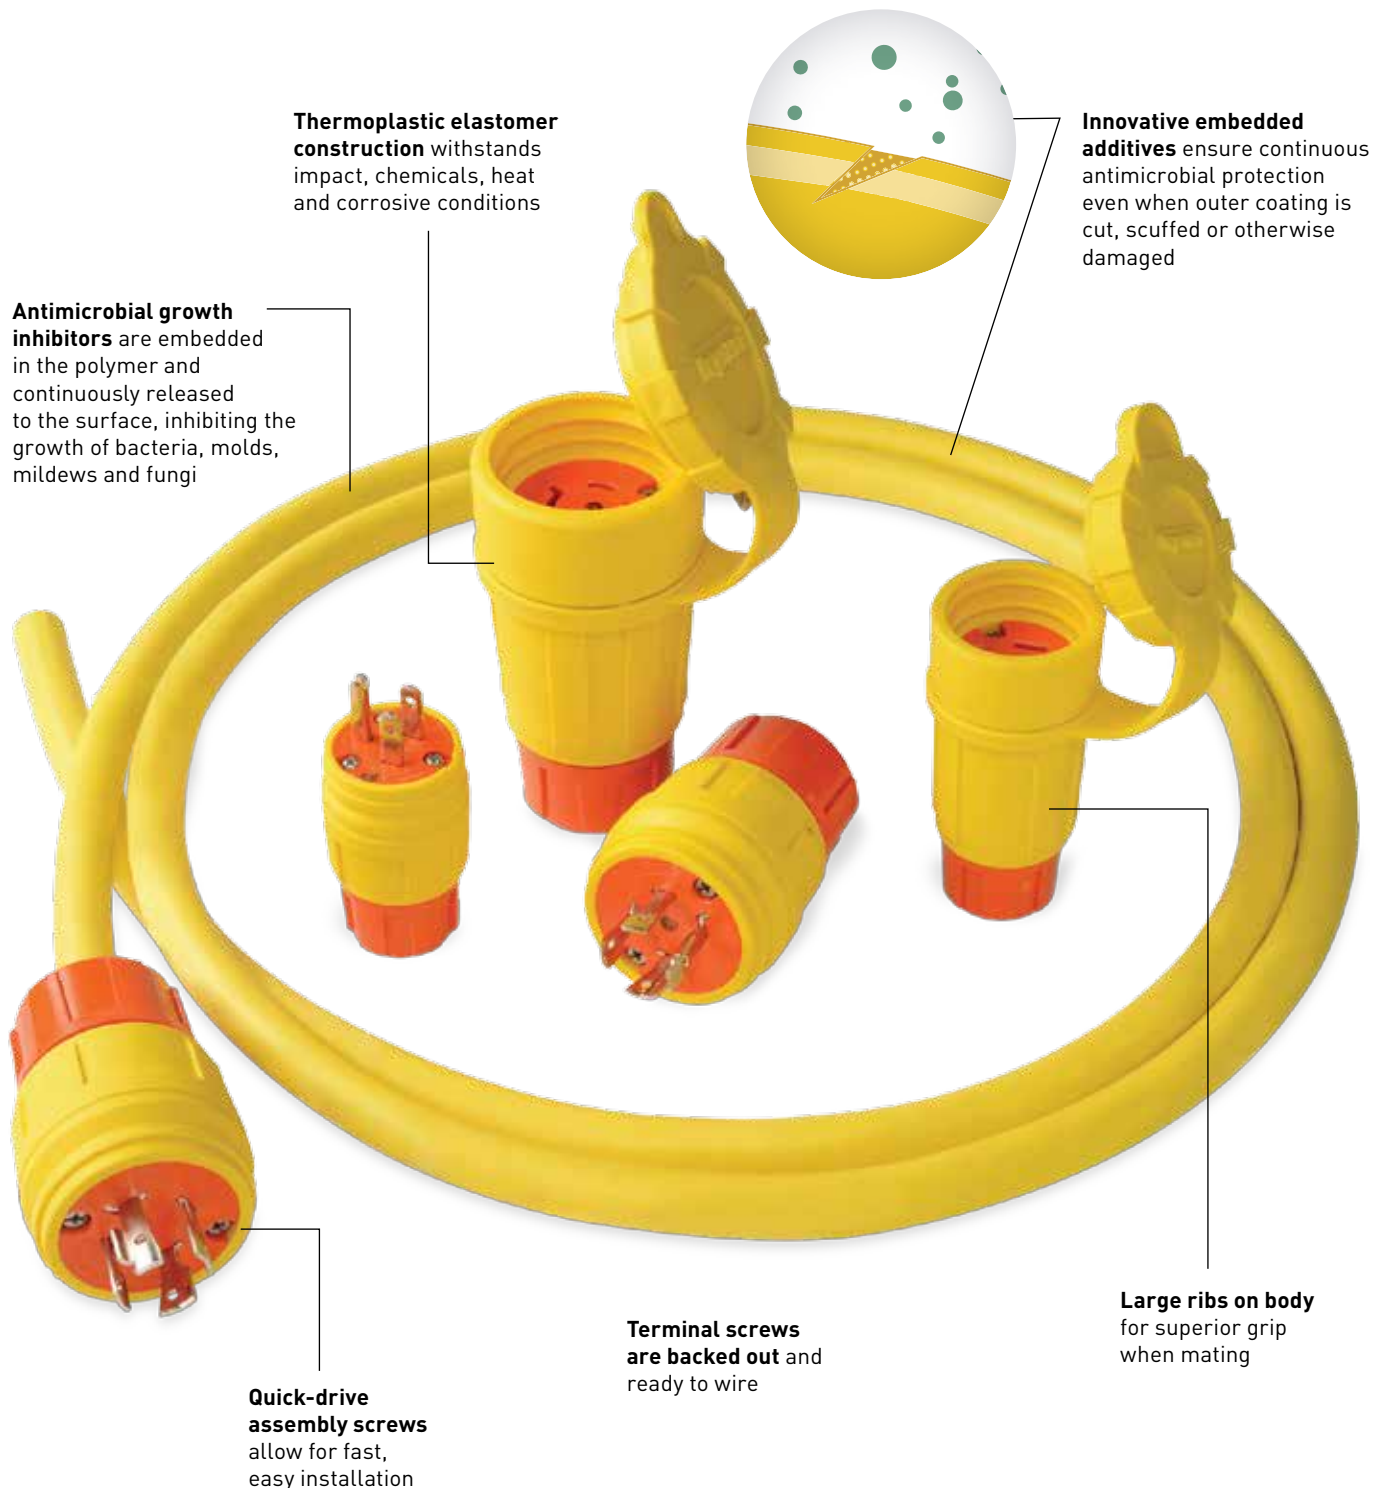



DON'T LET YOUR PLANT FLOOR BECOME A RECIPE FOR DISASTER.

Whether your facility handles meat, dairy, fruits and vegetables, beverages or any other type of consumables, make sure you protect your customers and your business by keeping your electrical equipment from becoming a source of contamination.

All SteriGuard products meet strict NSF certification standards for public health protection and pass JIS Z2801 testing standards for inhibiting the growth of microorganisms. In fact, according to independent testing, SteriGuard provides nearly all-out protection against:



Escherichia (E. coli): Reduces surface bacteria by **>99.99%**



Staphylococcus (Staph), MRSA: Reduces surface bacteria by **99.98%**




Listeria monocytogenes: Reduces surface bacteria by **>99.99%**



Salmonella: Reduces surface bacteria by **99.97%**

P&S® SteriGuard™ Antimicrobial Wiring Devices



| Catalog Number | Rating | | Description | NEMA Config. |
|------------------------|--------|---------|-------------|--------------|
| | A. | V. | | |
| Straight Blade — 2P/3W | | | | |
| 14W47AM | 15 | 125 | Plug | 5-15P |
| 15W47AM | | | Connector | 5-15R |
| 14W33AM | 20 | 125 | Plug | 5-20P |
| 15W33AM | | | Connector | 5-20R |
| 14W49AM | 15 | 250 | Plug | 6-15P |
| 15W49AM | | | Connector | 6-15R |
| 14W48AM | 20 | 250 | Plug | 6-20P |
| 15W48AM | | | Connector | 6-20R |
| Turnlok® — 2P/3W | | | | |
| 24W47AM | 15 | 125 | Plug | L5-15P |
| 25W47AM | | | Connector | L5-15R |
| 26W47AM | 20 | 125 | Plug | L5-20P |
| 27W47AM | | | Connector | L5-20R |
| 28W47AM | 30 | 125 | Plug | L5-30P |
| 29W47AM | | | Connector | L5-30R |
| 24W49AM | 15 | 250 | Plug | L6-15P |
| 25W49AM | | | Connector | L6-15R |
| 26W48AM | 20 | 250 | Plug | L6-20P |
| 27W48AM | | | Connector | L6-20R |
| 28W48AM | 30 | 250 | Plug | L6-30P |
| 29W48AM | | | Connector | L6-30R |
| 24W34AM | 15 | 277 | Plug | L7-15P |
| 25W34AM | | | Connector | L7-15R |
| 26W49AM | 20 | 277 | Plug | L7-20P |
| 27W49AM | | | Connector | L7-20R |
| 28W49AM | 30 | 277 | Plug | L7-30P |
| 29W49AM | | | Connector | L7-30R |
| Turnlok — 3P/4W | | | | |
| 26W74AM | 20 | 125/250 | Plug | L14-20P |
| 27W74AM | | | Connector | L14-20R |
| 28W74AM | 30 | 125/250 | Plug | L14-30P |
| 29W74AM | | | Connector | L14-30R |
| 26W75AM | 20 | 3Ø250 | Plug | L15-20P |
| 27W75AM | | | Connector | L15-20R |
| 28W75AM | 30 | 3Ø250 | Plug | L15-30P |
| 29W75AM | | | Connector | L15-30R |
| 26W76AM | 20 | 3Ø480 | Plug | L16-20P |
| 27W76AM | | | Connector | L16-20R |

P&S® SteriGuard™ Antimicrobial Wiring Devices

| Catalog Number | Rating | | Description | NEMA Config. |
|-------------------------|--------|-------------|---------------------|--------------|
| | A. | V. | | |
| Turnlok — 3P/4W (con't) | | | | |
| 28W76AM | 30 | 3Ø480 | Plug | L16-30P |
| 29W76AM | | | Connector | L16-30R |
| 28W77AM | 30 | 3Ø600 | Plug | L17-30P |
| 29W77AM | | | Connector | L17-30R |
| Turnlok — Non-NEMA | | | | |
| 26W08AM | 20 | 125/250 | Plug, 3P/3W NG | • |
| 27W08AM | | | Connector, 3P/3W NG | • |
| 28W08AM | 30 | 125/250 | Plug, 3P/3W NG | • |
| 29W08AM | | | Connector, 3P/3W NG | • |
| 28W09AM | 30 | 3ØY 120/208 | Plug, 4P/4W NG | • |
| 29W09AM | | | Connector, 4P/4W NG | • |

| Catalog Number | Description |
|-------------------------------|---|
| SteriGuard Accessories | |
| PS15WTAM | Female Watertight Cap 15/20A Straight Blade & 15A Locking Devices |
| PS27WTAM | Female Watertight Cap 20A Locking Devices |
| PS29WTAM | Female Watertight Cap 30A Locking Devices |
| PS14WTAM | Male Watertight Cap 15/20A Straight Blade & 15A Locking Devices |

Bulk Cord — UL SEOW, cUL STOW **Cord Drops** — Wiring Devices: UL/CSA Listed — Industrial Cord: UL SEOW, cUL STOW

P&S® SteriGuard™ Antimicrobial Bulk Portable Cord

| Catalog Number | Cord Size and Type | Length |
|--------------------|--------------------|--------|
| PS14350AM | 14/3 SEOW/STOW | 50' |
| PS143100AM | | 100' |
| PS1431000AM | | 1000' |
| PS12350AM | 12/3 SEOW/STOW | 50' |
| PS123100AM | | 100' |
| PS1231000AM | | 1000' |
| PS12450AM | 12/4 SEOW/STOW | 50' |
| PS124100AM | | 100' |
| PS1241000AM | | 1000' |

Other sizes and lengths available upon request.

Cord Drops on next page.





P&S® SteriGuard™ Antimicrobial Cord Drops

To ensure you get the right product for your application, use the charts and follow the example below to select the right cord size and type, your required length, and the device part number. To place the order contact Customer Service at **800-223-4162** or **customer.support@legrand.us**

PS

Prefix

123

Cord Size and Type

143 = 14/3 SEOW

123 = 12/3 SEOW

124 = 12/4 SEOW

Other sizes available
upon request.

XX

**Select Length
(1 to 99 ft.)**

14W47AM

SteriGuard Part No.

Select specific device
from the chart. Part
number shown above
is an example only.



©2016 Legrand BR1897 All Rights Reserved 07/16 EMA/CGXTP

designed to be better.™



Electrical Wiring Systems

P.O. Box 4822
Syracuse, NY 13221-4822
800.776.4035
www.legrand.us/PassandSeymour

570 Applewood Crescent
Vaughan, Ontario L4K 4B4
905.738.9195
www.legrand.ca

For additional technical or application-specific information, call
800-223-4185 or visit our website at www.legrand.us/PassandSeymour.
We're eager to put our expertise to work for you.

FOLLOW US

