


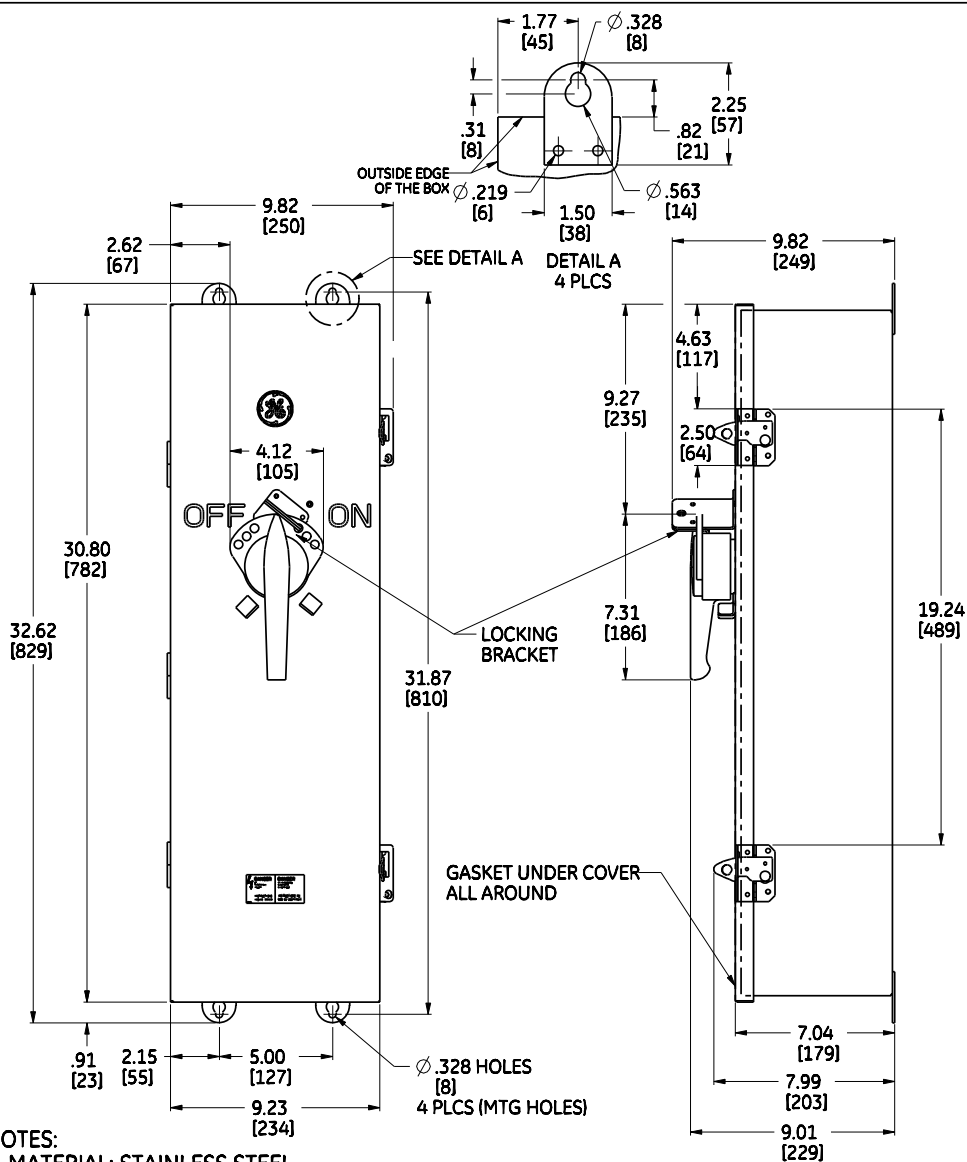

- NOTES:
1. MATERIAL: STAINLESS STEEL
 2. FINISH: NONE
 3. AGENCY APPROVAL: UL LISTED -FILE E11592
 4. SUITABLE FOR USE AS SERVICE EQUIPMENT WHEN NEUTRAL ASSEMBLY IS INSTALLED
 5. THE SHORT CIRCUIT RATING OF THIS ENCLOSED CIRCUIT BREAKER IS EQUAL TO THE INTERRUPTING RATING, AT THE SUPPLY VOLTAGE MARKED ON THE CIRCUIT BREAKER INSTALLED
 6. CONSULT BUYLOG FOR ALTERNATIVE LUGS
 7. HUBS FURNISHED ARE CROME PLATED BY G.E.
 8. HUB MTG. HOLES TO BE PROVIDED BY CUSTOMER
 9. MYERS HUB INCLUDED FOR LARGEST WIRE SIZE FOR CIRCUIT BREAKER

DUAL DIMENSIONS, INCHES
[MILLIMETERS]

FOR USE WITH GE TYPE BREAKERS
TFJ, TFK, THFK & TFL

CIRCUIT BREAKER TERMINAL LUG DATA			
CIRCUIT BREAKER CAT NO. PREFIX	AMPERE RATING	LUG TYPE	WIRE SIZE (AWG/KCMIL)
TFJ, TFK, THFK, TFL	225	TCAL24	(1) #4-300 CU-AL

FIELD INSTALLABLE NEUTRAL ASSEMBLY AND GROUND KIT			
CAT NO. PREFIX	TYPE	AMPERE RATING	WIRE SIZE (AWG/KCMIL)
TGL1	GND KIT	70-125A	(4) #14-8 CU (4) #12-8 AL (3) #14-4 CU (3) #6-4 AL
TGL20	GND KIT	150-400A	(1) #6-2/0 CU-AL
TNIA 225	NEUTRAL ASM	70-225A	(1) #1-300 CU-AL

 imagination at work

OUTLINE DRAWING - NEMA TYPE 4/4X ENCLOSURE
TF225CS

DWG NO.	DATE	REV
168D1626SH2	07/30/2009	03