

McGill™ 0801/0821 and 0811/0831 Series Rocker Switches

NEC/CEC: Listed for Ordinary Locations

Ordinary Location Switches

Applications

- Suitable for 20 Amp, 12 Vdc applications.
- Recognized for reliable, long service life by appliance manufacturers and manufacturers of industrial and commercial equipment.

Features

- Designed to fit full-size rectangular cutouts. Angled corners are suggested for optimum fit, but standard rectangular cutouts are acceptable.
- 1/4" Quick connect terminals standard on all switches.
- Multiple mounting styles - offset cover plate, metal snap-in bezel, nylon snap-in bezel.
- A wide variety of circuits are available to meet your specific requirements.
- McGill™ ensures extra reliability through mechanical excellence and a margin of electrical capacity - up to 20 Amps.
- White serrated gloss rocker style.

Standard Materials

- Contacts: silver plate
- Terminals: brass or copper
- Base: phenolic +150 °C (+302 °F)
- Rocker and nylon bracket: nylon 66 +105 °C (+221 °F)
- Spring steel snap-in nickel plated bezel
- Black gloss nylon snap-in bezel

NEC/CEC Certifications and Compliances

- UL Recognized Component
- UL File Number: E335442
- UL Standard: 1054, Guide WORY2
- CSA File Number: 249055
- CSA Standard: C22.2 No. 55
- RoHS Compliant



0811-0310N



0801-1310N


McGill™ 0801/0821 and 0811/0831 Series Rocker Switches

NEC/CEC: Listed for Ordinary Locations


Circuitry				Single Pole			Double Pole		
A	B	C	Mounting	Poles	Rating	Catalog Number	Poles	Rating	Catalog Number
ON	—	OFF	Offset Coverplate	SPST		0801-0310N	DPST		0811-0310N
ON	—	OFF	Snap-in Bezel (Metal)	SPST		0801-1310N	DPST		0811-1310N
ON	OFF	ON	Offset Coverplate	SPDT		0801-0311N	DPDT		0831-0311N
ON	OFF	ON	Snap-in Bezel (Metal)	SPDT		0801-1311N	DPDT		0831-1311N
ON	—	ON	Offset Coverplate	SPDT		0801-0312N	DPDT		0831-0312N
ON	—	ON	Snap-in Bezel (Metal)	SPDT	15 Amp, 125 Vac 10 Amp, 250 Vac 3/4 HP, 125-250 Vac	0801-1312N	DPDT	15 Amp, 125 Vac 10 Amp, 250 Vac 3/4 HP, 250 Vac	0831-1312N
(ON)	—	OFF	Offset Coverplate	SPST		0821-0313N	DPST		0831-0313N
(ON)	—	OFF	Snap-in Bezel (Metal)	SPST		0821-1313N	DPST		0831-1313N
(ON)	OFF	(ON)	Offset Coverplate	SPDT		0821-0314N	DPDT		0831-0314N
(ON)	OFF	(ON)	Snap-in Bezel (Metal)	SPDT		0821-1314N	DPDT		0831-1314N
(ON)	OFF	ON	Offset Coverplate	SPDT		0821-0316N	DPDT		0831-0316N
(ON)	OFF	ON	Snap-in Bezel (Metal)	SPDT		0821-1316N	DPDT		0831-1316N
ON	—	(OFF)	Offset Coverplate	SPST		0821-0317N †	DPST		0831-0317N
ON	—	(OFF)	Snap-in Bezel (Metal)	SPST	15 Amp, 125 Vac 10 Amp, 250 Vac 3/4 HP, 250 Vac	0821-1317N †	DPST	15 Amp, 125 Vac 10 Amp, 250 Vac 3/4 HP, 250 Vac	0831-1317N
(ON)	—	ON	Offset Coverplate	SPDT		0821-0318N	DPDT		0831-0318N
(ON)	—	ON	Snap-in Bezel (Metal)	SPDT		0821-1318N	DPDT		0831-1318N
ON	—	OFF	Snap-in Bezel (Nylon)	SPST	20 Amp, 120-277 Vac	0801-1310AN	DPST	20 Amp, 120-277 Vac 1-1/2 HP, 125 Vac 3/4 HP, 125-250 Vac	0811-1310AN
ON	OFF	ON	Snap-in Bezel (Nylon)	SPDT	20 Amp, 120-277 Vac 1-1/2 HP, 125 Vac	0801-1311AN	DPDT	20 Amp, 120-277 Vac 1-1/2 HP, 125 Vac	0831-1311AN
ON	—	ON	Snap-in Bezel (Nylon)	SPDT	3/4 HP, 125-250 Vac	0801-1312AN	DPDT	3/4 HP, 125-250 Vac	0831-1312AN

Dimensions in Millimeters (Inches)


Tapped Hole

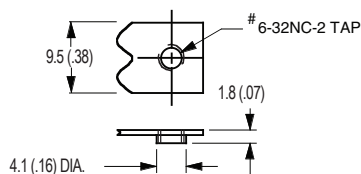


Rocker Switch

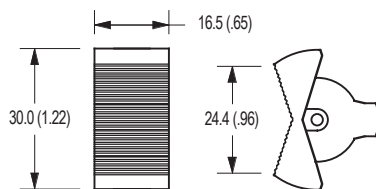


Mounting Hole




Offset Coverplate



Metal Snap-in Bezel



Nylon Snap-in Bezel



() Momentary. Poles: SP = single pole, DP = double pole, ST = single throw, DT = double throw.
† Not CSA or UL Approved.

Shaded catalog numbers are normally stocked items. All other items are made to order. Contact your local sales representative for pricing.